

INSTRUCTION

13-2019



Lightstream LED

721719.114



IP 66 IK04





~ 220 - 240 V 50/60 Hz



3 x 2,5 mm²



2,50 mm²



T_a min

721719.114

L 315, B 276, H 180

3,4 kg

-25 °C



CCT

CRI

T_a max

LED

2 x 27 W


54 W

6050 lm

3000 K

80

42 °C



A++

A++

5 A / 50 µs

31

50

52

85



Die Leuchte darf nur mit ihren vollständigen Schutzabdeckungen betrieben werden.
The luminaire must be used with its complete protective covers only.

EN 12464



EN 12464

EN 13201



EN 12464 / EN 13201


Wartungsplan/
Maintenance
schedule




RZB
Rudolf Zimmermann,
Bamberg GmbH
Rheinstraße 16
D-96052 Bamberg
Deutschland
Telefon +49 951/79 09-0
Telefax +49 951/79 09-198
www.rzb.de
info@rzb-leuchten.de




1




2




3




4




open close 1. open close














5



6

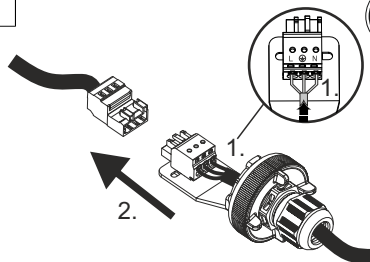


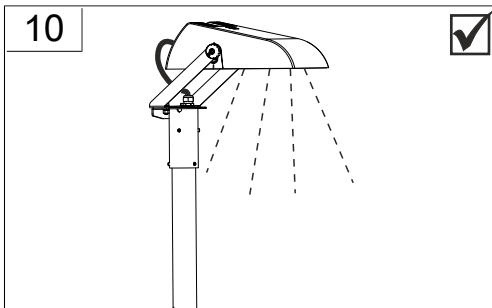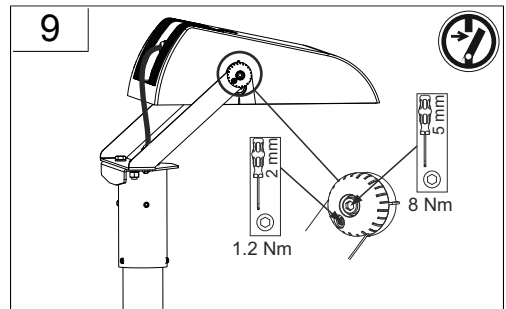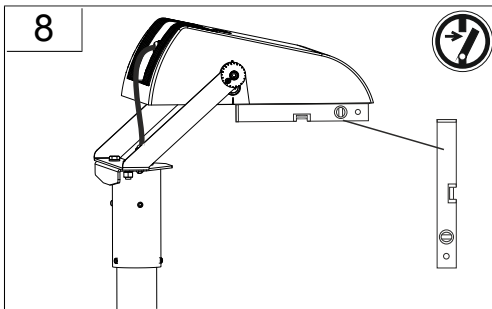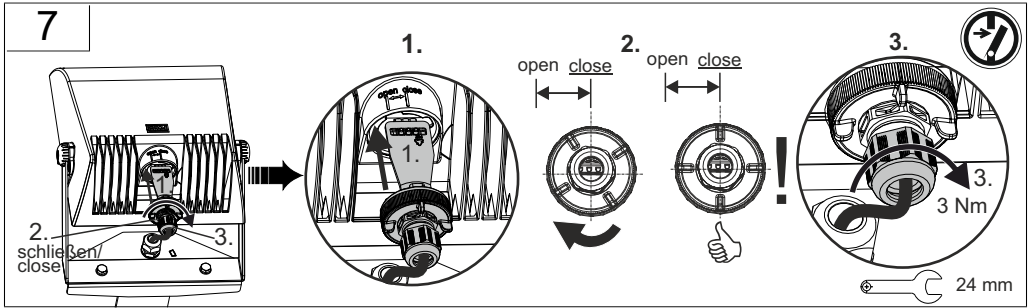

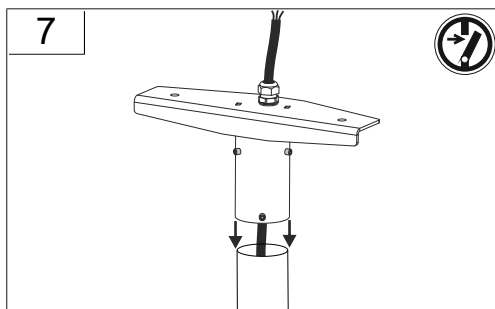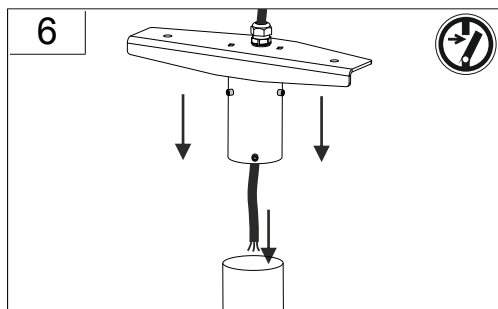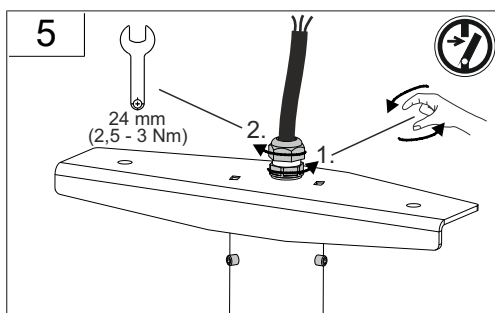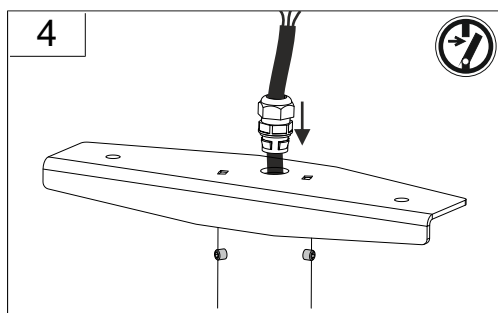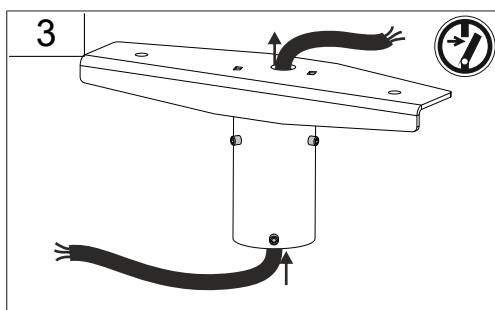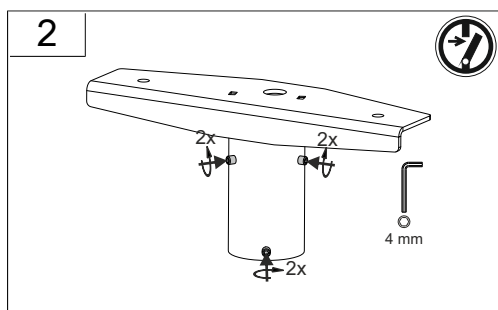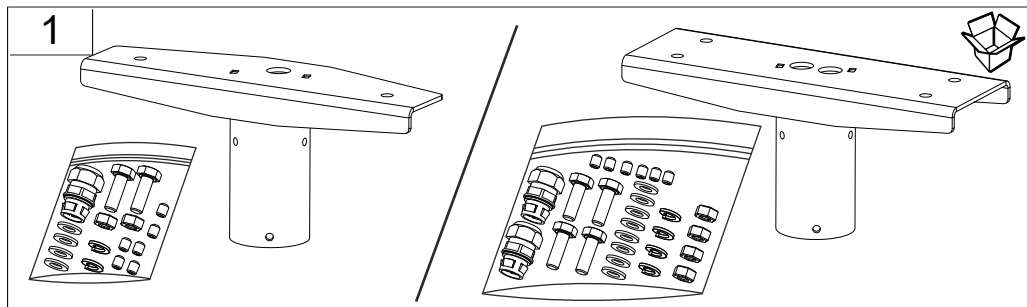




8


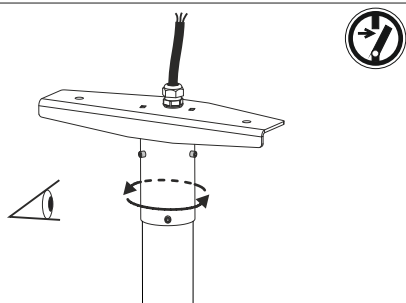


9



4 mm
(8-10 Nm)

10

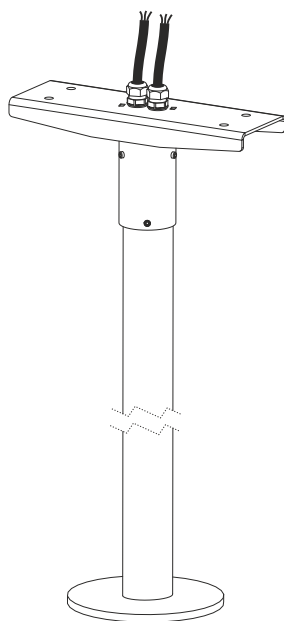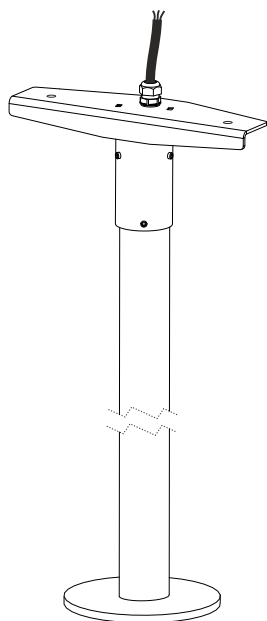



Hinweis zum Einsatz von Leuchten
mit ∇ -Kennzeichnung nach EN 60598-2-24

IP 4x  Umgebung ohne Staubablagerung

IP 5x  Umgebung mit nicht elektrisch leitender Staubablagerung

IP 6x  Umgebung mit elektrisch leitender Staubablagerung
Maximale Umgebungstemperatur
beim Einsatz der Leuchte in solcher
Umgebung beträgt nur 25° C!

Reference for application of lumiares
with ∇ - marking according to EN 60598-2-24

IP 4x  Environment without dust deposit

IP 5x  Environment with non-electrically conductive dust deposit








IP 6x  Environment with electrically conductive dust deposit
Maximum ambient temperature
when using the luminaire in such
an environment is only 25 ° C!

DIN 4844






Vor Installation, Wartung oder Reparatur freischalten/
power off before installation, maintenance or repair





	982047.000	L 250, B 95, H 153,	1,9 kg
	982047.004	L 250, B 95, H 153,	1,9 kg
	982048.000	L 250, B 95, H 153,	2,2 kg
	982048.004	L 250, B 95, H 153,	2,2 kg
	982049.000	L 250, B 114, H 153,	2,2 kg
	982049.004	L 250, B 114, H 153,	2,2 kg
	982050.000	L 250, B 114, H 153,	2,5 kg



	982050.004	L 250, B 114, H 153,	2,5 kg
	982092.000	L 178, B 174, H 38,	0,87 kg
	982093.000	L 178, B 194, H 38,	0,86 kg
	982086.000	L 1000, B 180, H 180,	3,9 kg
	982058.000	L 500, B 180, H 180,	2,9 kg
	982524.004	L 365, B 365, H 55,	4,4 kg



	982407.003	L 220, B 240, H 4	535 g
	982081.000	L 19, B 19, H 1	1 g
	982412.003	L 110, B 76, H 30	220 g