

INSTRUCTION

Quardo
901708.002



RZB
LIGHTING


~ 220 - 240 V 50/60 Hz IP 20 IK03





2 x 1,5 mm²



1,50 mm²



Umgebungstemperatur /
temperature ambiante
=> -20 °C ... + 35 °C



[mm]



[mm]



LED



1 x 34 W

L 176, B 176, H 4

LA 165, BA 165, HE
150, HEL 145, S 1-30



3900



37



A++



A++



1,059 kg

CCT [K]

3000

CRI

85

RG

RG 1



18,6 A / 240 µs



21




34



35



57



INSTRUCTION
WARTUNGSPLAN/
MAINTENANCE
SCHEDULE

DIN EN 61340-5-1



EN 12464
EN 13201



EN 12464
EN 13201



<100%





100%

EN 12464











H₂O



2020-02-12

www.rzb.de

1

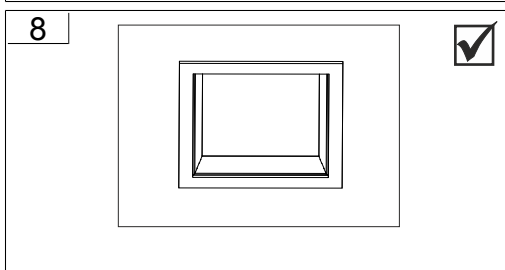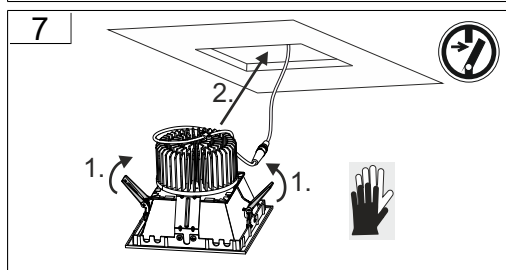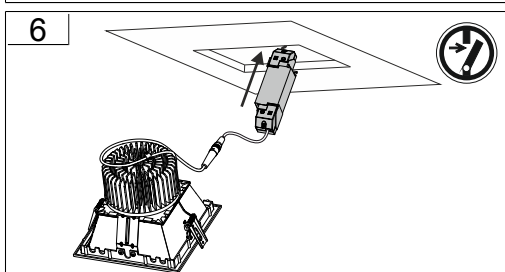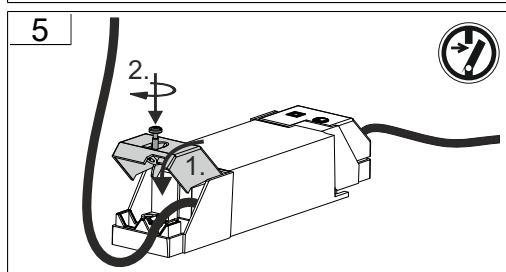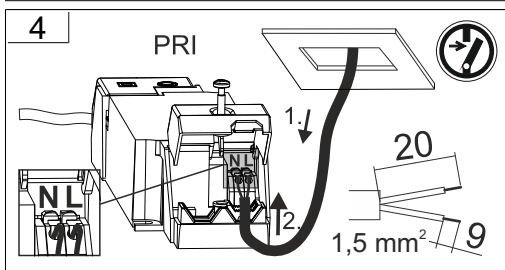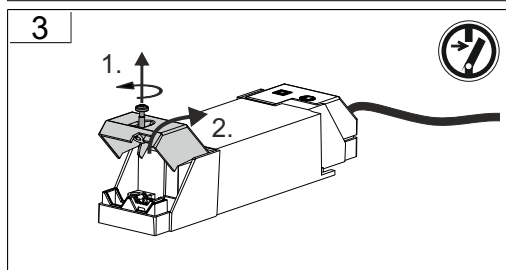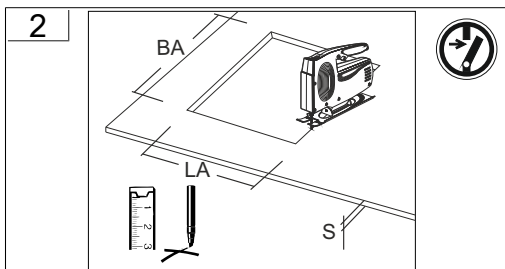
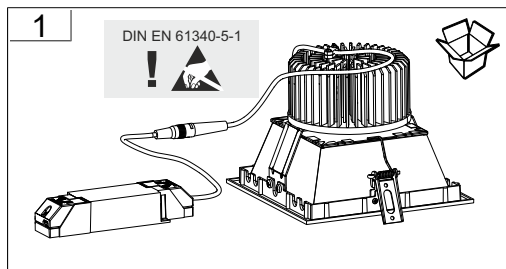





Bei Fragen zu unseren Symbolen, besuchen sie folgende Webseite:
If you have any questions about our signs, visit the following website:

www.rzb.de/fileadmin/assets/downloads/PDF/RZB_Symbolklaerung.pdf



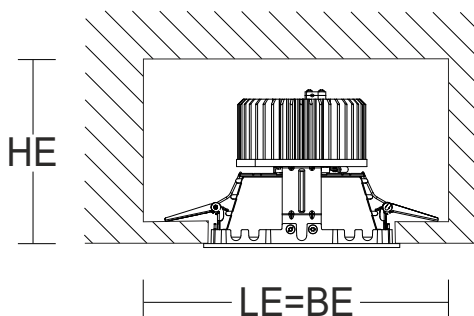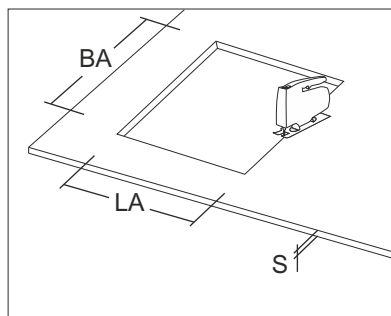

	L	B	H	LA	BA	S	LE	BE	HE
Quardo LED	176	176	4	165	165	1-30	500	500	150



Nicht zur Abdeckung mit
Wärmedämm-Material
geeignete Leuchten
Not to be covered with
thermal insulation material

RZB - Rudolf Zimmermann, Bamberg GmbH

Rheinstraße 16
96052 Bamberg

Telefon: 0951/7909-0
Telefax: 0951/7909-198

E-mail: info@rzb-leuchten.de