


PLL 28.0475.830.1/DALI

PL 28 (1xLED 46W 830/3000K 5210lm)

— C0/C180 cd / 1000 lm - - - C90/C270

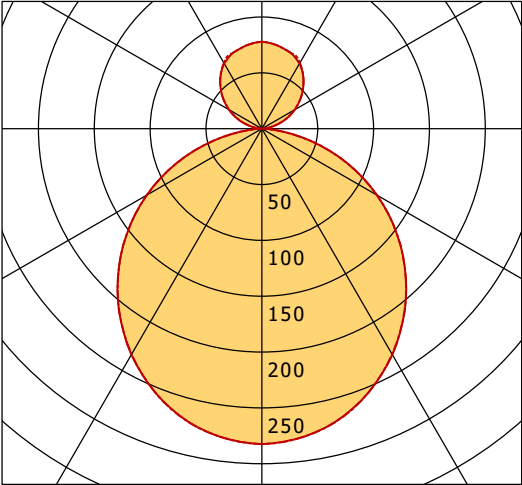

	C0	C90	C180	C270
0°	282	282	282	282
30°	234	233	234	233
60°	119	119	119	119
90°	1	1	1	1
120°	34	34	34	34
150°	67	68	67	68
180°	78	78	78	78
cd / 1000 lm				

LDC unsuitable for cone representation.
The C0 angle is oversized.

η	LED
Efficiency	113 lm/W
Direct/Indirect	↓ 78% / ↑ 22%
System Power	46 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	21.7
UGR C90/C270	21.6
CIE Flux Codes	48 80 96 78 100
Ra/CRI	> 80