


LED converter 700mA, Casambi dimmable

Article no. 17772000

Light.
For Generations.

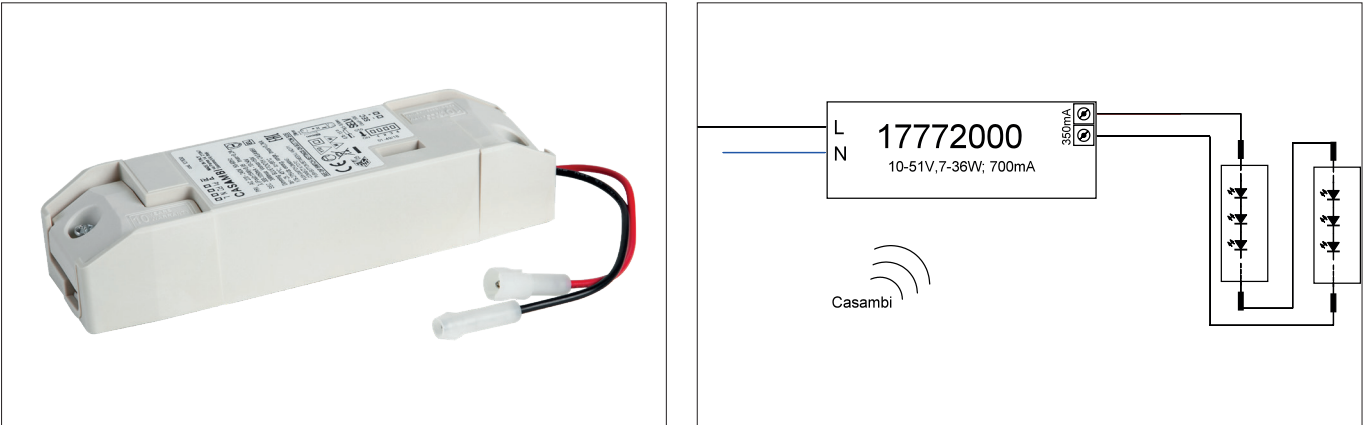

Tender
LED converter 700mA, Casambi dimmable, , Rectangular.This driver fulfills the requirements for safety lighting systems in accordance with DIN EN 50172 VDE 0108-100:2005-01. This converter is equipped with safety devices which protect it against overvoltage, short-circuit as well as thermal and electric overloads. The input and output terminals are suitable for cables with a cross-section of up to 1.5 mm². Material: Plastic, Degree of protection: according to DIN EN 60529 IP20, Protection class: (EN 61140) II, Current: 700 mA, Voltage: 230V AC 50Hz, Power: 38 W, Dimmable: Yes, Control: Casambi-Push.

Article data	
Article no.	17772000
GTIN	4251433926719
Short description	LED converter 700mA, Casambi dimmable
Material	Plastic
Shape	Rectangular
Length	146 mm
Width	44 mm
Hight	30 mm
Scope of delivery	Plug&Play-Ausgangsleitung, Länge 110 mm
Weight	0.159 kg
stamp	ENEC 05, MM, EL
Conformance	CE

LED converter 700mA, Casambi dimmable

Article no. 17772000

Light.
For Generations.

Operating technology of driver	
AC nominal voltage min	198 V
AC nominal voltage max	264 V
Frequency min	50 Hz
Frequency max	60 Hz
DC nominal voltage min	176 V
DC nominal voltage max	275 V
Protection class	II
Degree of protection	IP20
Power min	7 W
Power	38 W
Output_ripple_current	3
Starting current	5A 50µs
Suitable for emergency lighting	No
measure point (tc)	85 °C
Version	Plug&Play
Power factor	0.95
max. no. lights on B16 A	50
Output voltage max	51.00 V
Output voltage min	10.00 V
Flicker value Pst LM	1.00
Control	Casambi-Push
Number of poles	2
Environment temperature (ta)	-25 °C up to +45 °C
Measure point (tc)	max. +80 °C
Average nominal lifespan	40000 h
Output current	700 mA

Packing data	
Gross weight	0.177 kg
Length of packaging	60 mm
Packaging width	27 mm
Packaging height	150 mm
Disposal at end of life	This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately. By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.