

# INSTRUCTION

LINEDO

950663.920.400.200




**RZB**  
LIGHTING


≈ 220 - 240 V 0/50/60 Hz IP 20





CE ENEC



5 x 2,5 mm²



Umgebungstemperatur /  
temperature ambiante  
=> -25 °C ... + 50 °C



L 598, B 88, H 235



LED



2,97 kg

$\Phi$  [lm]

5200

P [W]

58

P

2 x 26 W

CCT [K]

2700

CRI

95

RG

RG 1

EEK

A+

EEK

A+



9 A / 65 µs



10



17



17



28

P<sub>f</sub>

0,88



T20



INSTRUCTION  
WARTUNGSPLAN/  
MAINTENANCE  
SCHEDULE



DIN EN 61340-5-1



EN 12464  
EN 13201



EN 12464  
EN 13201



<100%




INSTRUCTION  
WARTUNGSPLAN/  
MAINTENANCE  
SCHEDULE



100%







EN 12464



2020-09-17



www.rzb.de

1

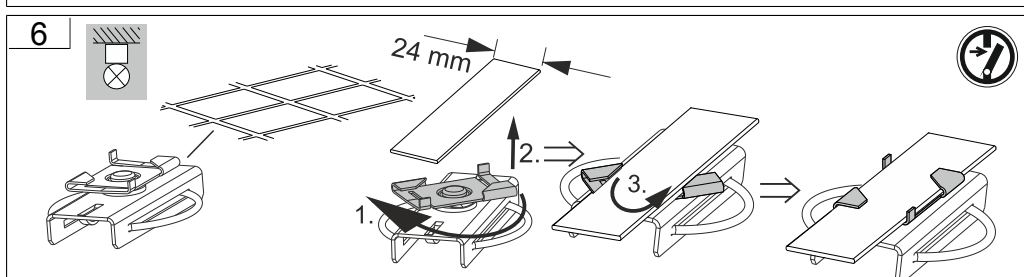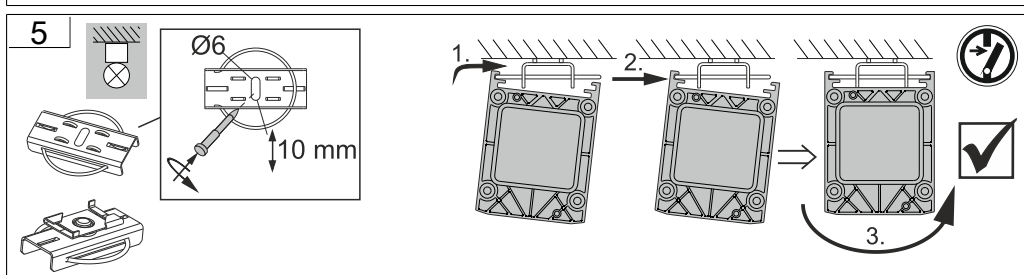
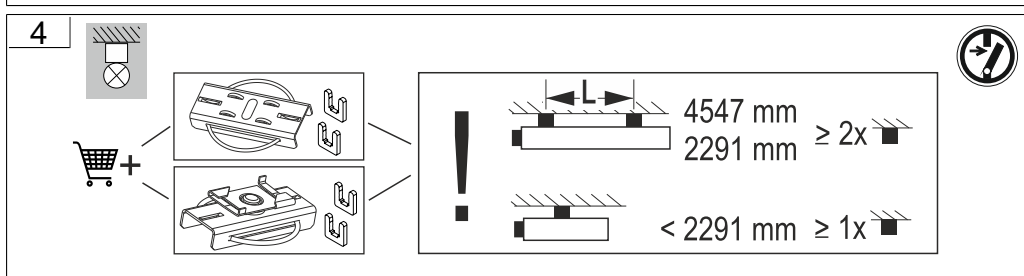
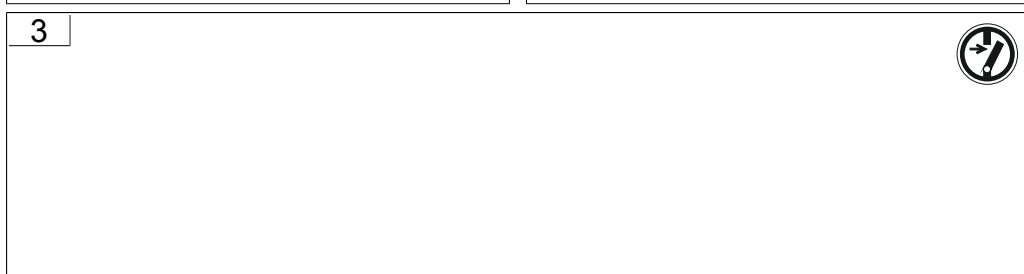
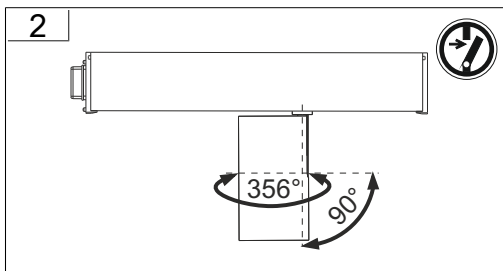
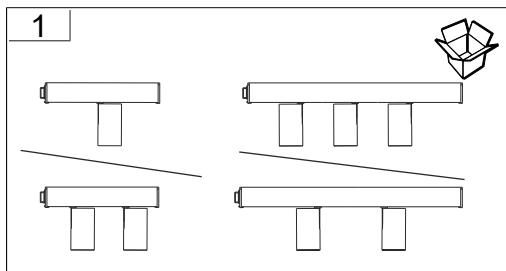









7






8





9



10




11

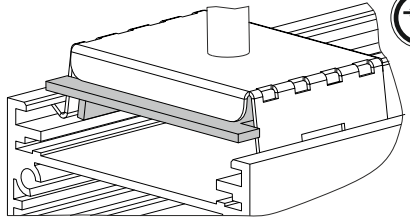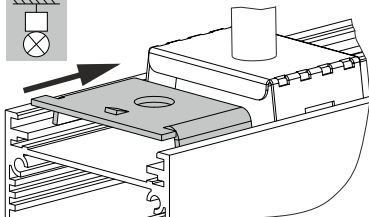






12

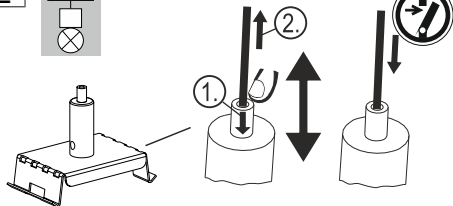


13







14

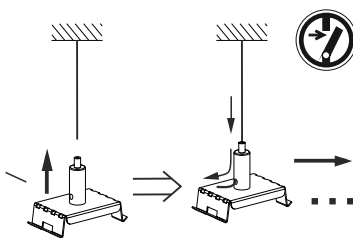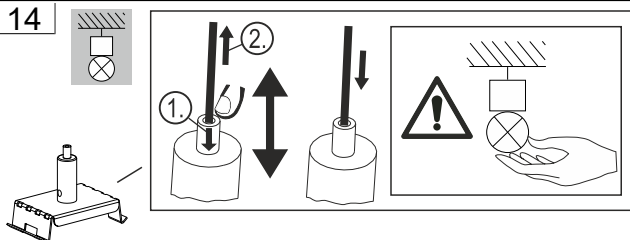


15



Werkseinstellung L1 /  
Factory setting L1

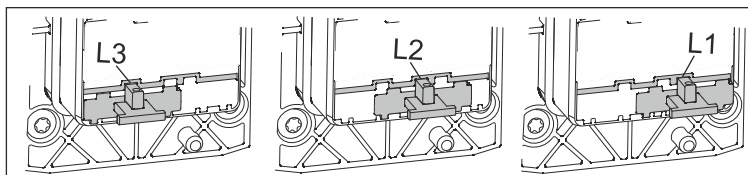


16

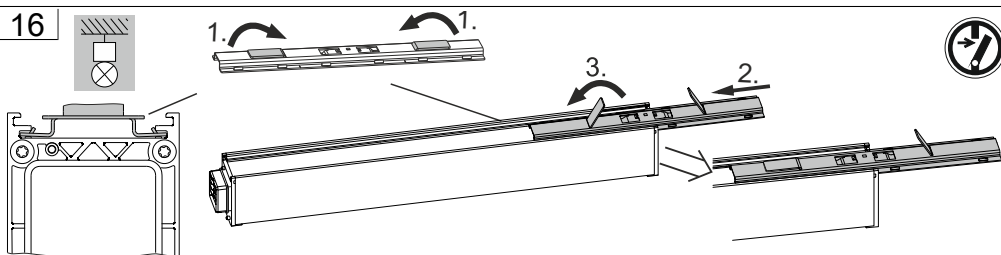





17

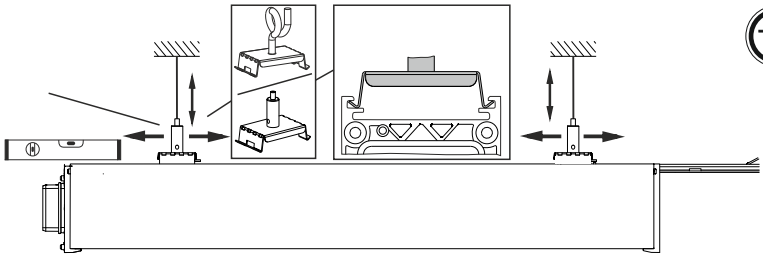


18

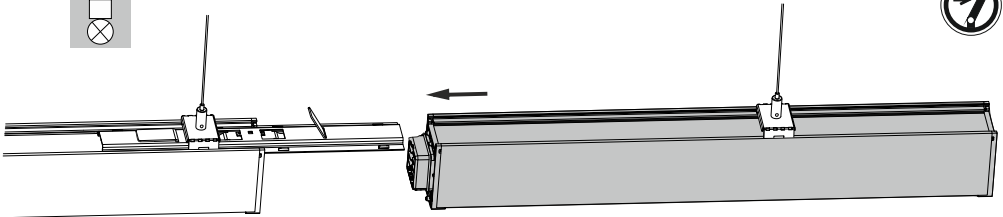

19

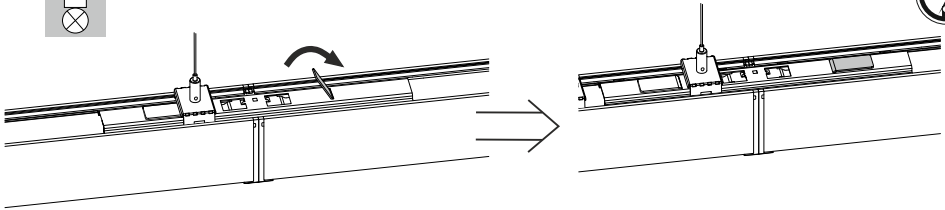

20



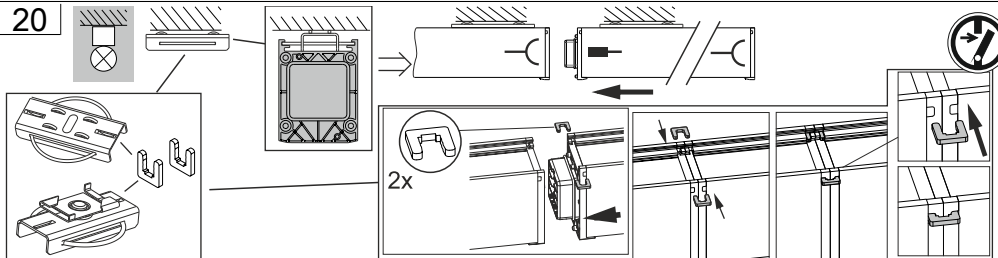


21












22

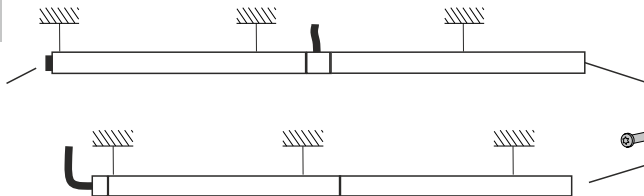

23

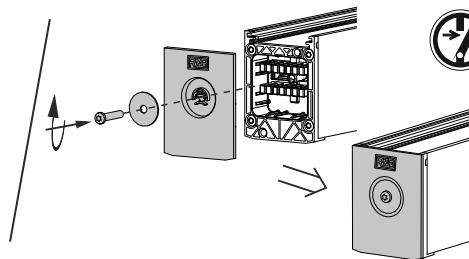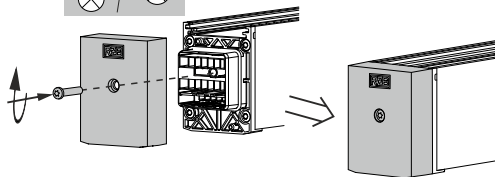

24







Bei Fragen zu unseren Symbolen,  
besuchen Sie folgende Webseite:




If you have any questions about our  
signs, visit the following website:

[www.rzb.de/fileadmin/assets/downloads/PDF/RZB\\_Symbolklaerung.pdf](http://www.rzb.de/fileadmin/assets/downloads/PDF/RZB_Symbolklaerung.pdf)

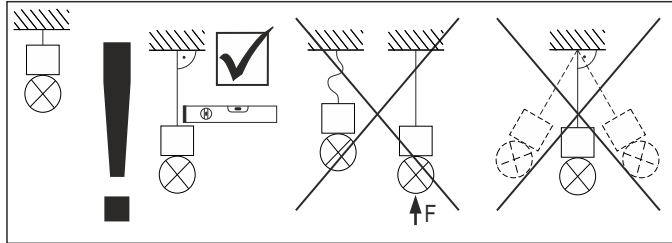



|                                                                                    |              |                            |                   |        |
|------------------------------------------------------------------------------------|--------------|----------------------------|-------------------|--------|
|    | 982678.000   | Einspeisung<br>Feed        | L 312, B 58, H 76 | 600 g  |
|    | 982678.000.1 | Einspeisung<br>Feed        | L 330, B 58, H 76 | 728 g  |
|    | 982698.000   | Einspeisung<br>Feed        | L 330, B 58, H 76 | 850 g  |
|    | 982698.000.1 | Einspeisung<br>Feed        | L 312, B 58, H 76 | 850 g  |
|    | 982698.000.2 | Einspeisung<br>Feed        | L 349, B 58, H 76 | 850 g  |
|    | 982661.000   | Pendelset<br>Pendant kit   | , LP 1500         | 56 g   |
|    | 982662.000   | Pendelset<br>Pendant kit   | , LP 1500         | 240 g  |
|   | 982663.000   | Befestigungsset<br>Fixture | L 33, B 54,       | 63 g   |
|  | 982664.000   | Befestigungsset<br>Fixture | L 33, B 54,       | 39,1 g |
|  | 982665.000   | Pendelset<br>Pendant kit   | , LP 1500         | 80 g   |
|  | 982717.000   | Pendelset<br>Pendant kit   | , LP 5000         | 190 g  |
|  | 982718.000   | Pendelset<br>Pendant kit   | , LP 5000         | 800 g  |





|  |            |                                                     |                  |        |
|--|------------|-----------------------------------------------------|------------------|--------|
|  | 982719.000 | Pendelset<br>Pendant kit                            | , LP 5000        | 270 g  |
|  | 982580.010 | Deckenmontageset<br>Ceiling surface mounting<br>kit | L 70, B 28, H 16 | 44 g   |
|  | 982666.000 | Befestigungsset<br>Fixture                          | L 70, B 54, H 22 | 25 g   |
|  | 982699.009 | Endkappe<br>End cap                                 | L 16, B 58, H 76 | 21,5 g |
|  | 982700.009 | Endkappe<br>End cap                                 | L 23, B 58, H 76 | 31 g   |
|  | 982680.000 | Verbinder<br>Connector                              | L 300, B 48, H 9 | 181 g  |
|  | 982370.000 |                                                     | D 74, H 3        | 33 g   |
|  | 982370.010 |                                                     | D 74, H 3        | 33 g   |
|  | 982371.003 |                                                     | D 74, H 3        | 1,7 g  |
|  | 982369.003 |                                                     | D 82, H 55       | 84 g   |
|  | 982369.013 |                                                     | D 82, H 55       | 84 g   |
|  | 982369.023 |                                                     | D 82, H 55       | 84 g   |



|  |            |            |       |
|--|------------|------------|-------|
|  | 982421.002 | D 82, H 31 | 28 g  |
|  | 982368.003 | D 82, H 55 | 25 g  |
|  | 982368.013 | D 82, H 55 | 25 g  |
|  | 982368.023 | D 82, H 55 | 25 g  |
|  | 982369.033 | D 82, H 55 | 89 g  |
|  | 982369.043 | D 82, H 55 | 89 g  |
|  | 982419.002 | D 82, H 20 | 13 g  |
|  | 982368.033 | D 82, H 55 | 25 g  |
|  | 982647.002 | D 87, H 41 | 200 g |
|  | 982648.002 | D 87, H 76 | 240 g |



RZB - Rudolf Zimmermann, Bamberg GmbH

Rheinstraße 16  
96052 Bamberg

Telefon: 0951/7909-0  
Telefax: 0951/7909-198

E-mail: [info@rzb-leuchten.de](mailto:info@rzb-leuchten.de)