



UMPRO-SET LED recessed downlight set
Article no. 12171153

Light.
For Generations.

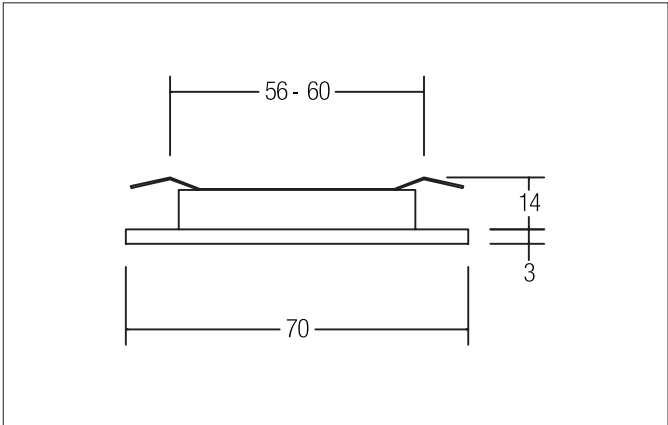

Tender	
LED recessed downlight set, Round.Toolless ceiling installation by leaf spring. Ceiling cut-out Ø 60 mm, Installation depth 14 mm, Outer diameter 70 mm, Weight 0,670 kg, with rotationssymmetrical, deep, wide distributed light intensity. Cover plastic, opal. Luminous flux 525 lm, Power 3 x 6 W, Light colour warm white, Correlated color temprature (CCT) 3.200 K, Colour rendering index CRI 81, Housing material: Cast iron / Plastic, Colour: Alu, Permissible ambient temperature (ta): -20 °C - +25 °C, Protection class (EN 61140): II, Degree of protection (DIN EN 60529): IP20. With electronic driver, on/off switchable.	

Article data	
Article no.	12171153
GTIN	4250047773061
Series name	UMPRO-SET
Short description	LED recessed downlight set
Material	Cast iron / Plastic
Colour	Alu
Type of surface	Matt
Shape	Round
Outer diameter	70 mm
Built-in diameter_min	56 mm
Built-in diameter	60 mm
Installation depth	14 mm
Height	3 mm
Weight	0.670 kg
stamp	MM
Conformance	CE, UKCA

UMPRO-SET LED recessed downlight set
Article no. 12171153

Light.
For Generations.

Lighting technology	
Colour temperature	3.200 K
Light colour	White
Light output	Direct
Luminous flux	525 lm
System efficiency	262 lm/W
Colour rendering	CRI 81
Reflector	Without
Beam angle	45°
Light sharing	Symmetric
Adjustable color temperature	No

Packing data	
Gross weight	0.78 kg
Length of packaging	200 mm
Packaging width	150 mm
Packaging hight	150 mm
Disposal at end of life	This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately. By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.