


LED-round converter 350 mA, trailing-edge phase dimmer

Article no. 17652020

Light.  
For Generations.

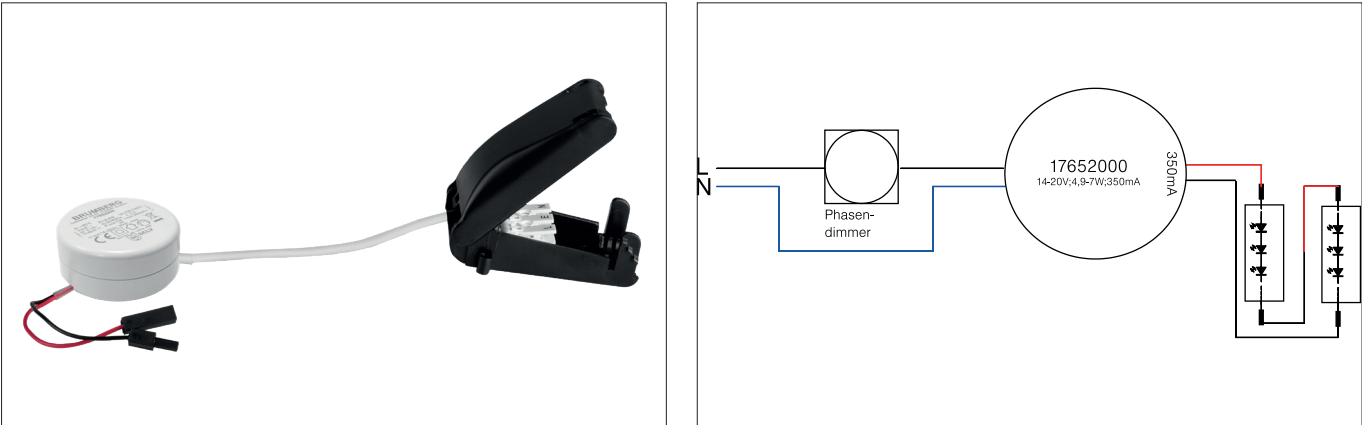

Tender

LED-round converter 350 mA, trailing-edge phase dimmer, , Round.Lamp holder: Plug&Play, Material: Plastic, Degree of protection: according to DIN EN 60529 IP20, Protection class: (EN 61140) II, Current: 350 mA, Voltage: 230V AC 50Hz, Power: 7 W, Dimmable: Yes, Control: Trailing-edge phase.

| Article data                  |                                                          |
|-------------------------------|----------------------------------------------------------|
| Article no.                   | 17652020                                                 |
| GTIN                          | 4251433918707                                            |
| Short description             | LED-round converter 350 mA, trailing-edge phase dimmer   |
| Material                      | Plastic                                                  |
| Shape                         | Round                                                    |
| Outer diameter                | 51 mm                                                    |
| Hight                         | 24 mm                                                    |
| Scope of delivery             | Plug&Play-Ausgangsleitung, Länge 110 mm und Anschlussbox |
| Weight                        | 0.087 kg                                                 |
| Length of the connection line | 110 mm                                                   |
| Conformance                   | CE                                                       |

**LED-round converter 350 mA, trailing-edge phase dimmer**

Article no. 17652020

Light.  
For Generations.

| Operating technology of driver  |                            |
|---------------------------------|----------------------------|
| AC nominal voltage min          | 200 V                      |
| AC nominal voltage max          | 264 V                      |
| Frequency min                   | 50 Hz                      |
| Frequency max                   | 60 Hz                      |
| Protection class                | II                         |
| Degree of protection            | IP20                       |
| Power min                       | 4.9 W                      |
| Power max.                      | 7 W                        |
| Starting current                | 3 A (100 µs)               |
| Suitable for emergency lighting | No                         |
| measure point (tc)              | 85 °C                      |
| Version                         | Plug&Play + connection box |
| Power factor                    | 0.5                        |
| Output voltage max              | 20.00 V                    |
| Output voltage min              | 14.00 V                    |
| Control                         | Trailing-edge phase        |
| Number of poles                 | 2                          |
| Flicker-free                    | Yes                        |
| Environment temperature (ta)    | -20 °C bis +50 °C          |
| Measure point (tc)              | max. +85 °C                |
| Average nominal lifespan        | 30000 h                    |
| Output current                  | 350 mA                     |
| Length of the connection line   | 110 mm                     |

| Packing data            |                                                                                                                                                                                                                                                                                                                                                                                |
|-------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Gross weight            | 0.124 kg                                                                                                                                                                                                                                                                                                                                                                       |
| Length of packaging     | 95 mm                                                                                                                                                                                                                                                                                                                                                                          |
| Packaging width         | 75 mm                                                                                                                                                                                                                                                                                                                                                                          |
| Packaging height        | 95 mm                                                                                                                                                                                                                                                                                                                                                                          |
| Disposal at end of life | <p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p> |