


LED converter 700 mA, 1-10 V dimmable (analog)

Article no. 17767010

Light.  
For Generations.

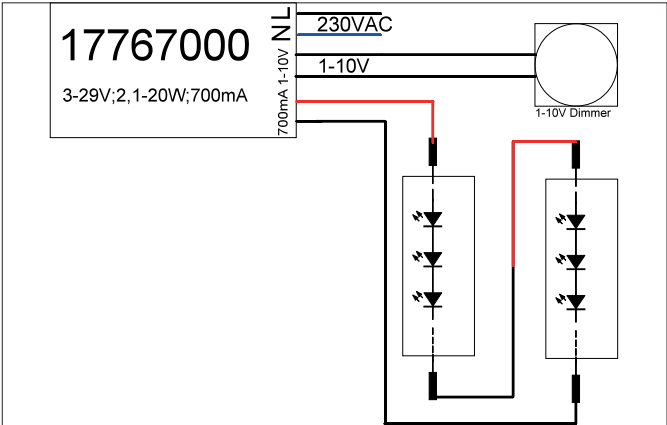

**Tender**

LED converter 700 mA, 1-10 V dimmable (analog), , Rectangular.This converter is equipped with safety devices which protect it against overvoltage, short-circuit as well as thermal and electric overloads. The input and output terminals are suitable for cables with a cross-section of up to 1.5 mm². Material: Plastic, Degree of protection: according to DIN EN 60529 IP20, Protection class: (EN 61140) II, Current: 700 mA, Voltage: 230V AC 50Hz , Power: 20 W, Dimmable: Yes, Control: 1-10 V.

| Article data      |                                                |
|-------------------|------------------------------------------------|
| Article no.       | 17767010                                       |
| GTIN              | 4251433924104                                  |
| Short description | LED converter 700 mA, 1-10 V dimmable (analog) |
| Material          | Plastic                                        |
| Shape             | Rectangular                                    |
| Length            | 110 mm                                         |
| Width             | 52 mm                                          |
| Hight             | 22 mm                                          |
| Weight            | 0.102 kg                                       |
| stamp             | ENEC 05, MM, EL                                |
| Conformance       | CE                                             |

**LED converter 700 mA, 1-10 V dimmable (analog)**

Article no. 17767010

Light.  
For Generations.

| Operating technology of driver  |                     |
|---------------------------------|---------------------|
| AC nominal voltage min          | 99 V                |
| AC nominal voltage max          | 264 V               |
| Frequency min                   | 50 Hz               |
| Frequency max                   | 60 Hz               |
| DC nominal voltage min          | 176 V               |
| DC nominal voltage max          | 280 V               |
| Protection class                | II                  |
| Degree of protection            | IP20                |
| Power min                       | 2.1 W               |
| Power                           | 20 W                |
| Output_ripple_current           | 3                   |
| Starting current                | 5A 50µs             |
| Suitable for emergency lighting | No                  |
| measure point (tc)              | 80 °C               |
| Version                         | without             |
| Power factor                    | 0.95                |
| max. no. lights on B16 A        | 50                  |
| Output voltage max              | 29.00 V             |
| Output voltage min              | 3.00 V              |
| Flicker value Pst LM            | 1.00                |
| Control                         | 1-10 V              |
| Number of poles                 | 4                   |
| Environment temperature (ta)    | -25 °C up to +50 °C |
| Measure point (tc)              | max. +80 °C         |
| Output current                  | 700 mA              |

| Packing data            |                                                                                                                                                                                                                                                                                                                                                                                |
|-------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Gross weight            | 0.121 kg                                                                                                                                                                                                                                                                                                                                                                       |
| Length of packaging     | 60 mm                                                                                                                                                                                                                                                                                                                                                                          |
| Packaging width         | 27 mm                                                                                                                                                                                                                                                                                                                                                                          |
| Packaging height        | 150 mm                                                                                                                                                                                                                                                                                                                                                                         |
| Disposal at end of life | <p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p> |