INSTRUCTION

26-2018


Lightstream LED 721714.0031


RZB LIGHTING

IP 65 IK07 ~ 220 - 240 V 50/60 Hz LED 3 x 2,5 mm²

2,50 mm²








	[mm]		Ta min	Ta max
721714.0031	L 194, B 109, H 226	1,37 kg	-25 °C	50 °C


	$P_{\bigcirc}$	$P_{\square}$	CRI	CCT	$\Phi_{\square}$
LED	23 W	23 W	85	3000K	2150 lm

I max / I max/2 T50	B_{10}	B_{16}	C_{10}	C_{16}	$EEK_{\bigcirc}$	$EEK_{\square}$
5 A	31	50	52	85	A++	A++











Die Leuchte darf nur mit ihren vollständigen Schutzabdeckungen betrieben werden.
The luminaire must be used with its complete protective covers only.






RZB
Rudolf Zimmermann,
Bamberg GmbH
Rheinstraße 16
D-96052 Bamberg
Deutschland
Telefon +49 951/79 09-0
Telefax +49 951/79 09-198
www.rzb.de
info@rzb-leuchten.de


1




2

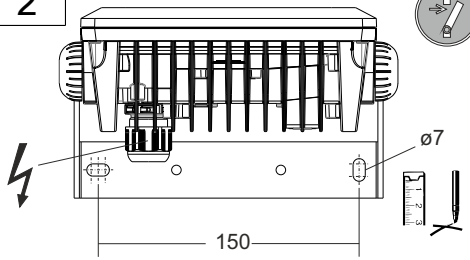


3

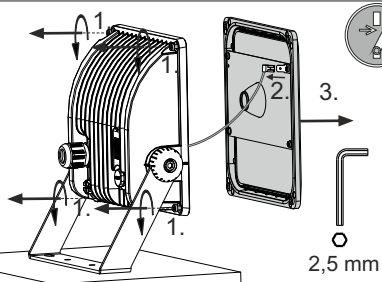


4

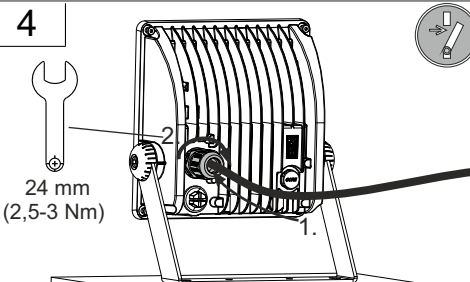


4.1

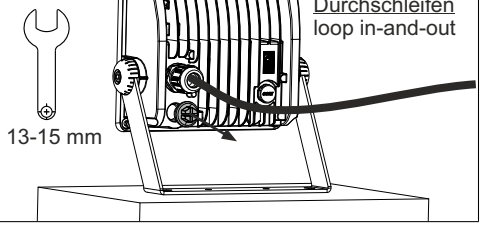


4.2

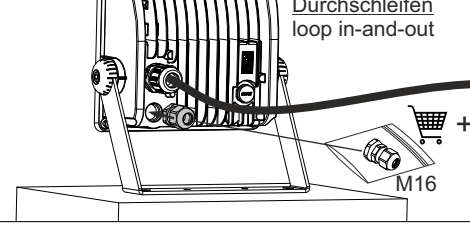


4.3

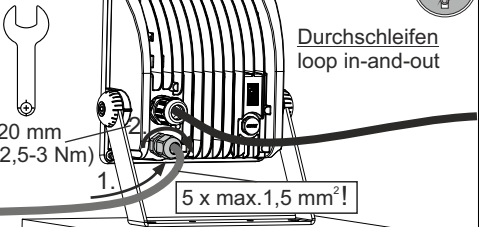


5

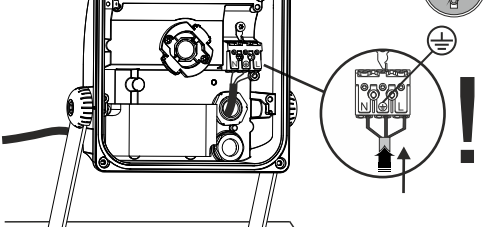


5.1

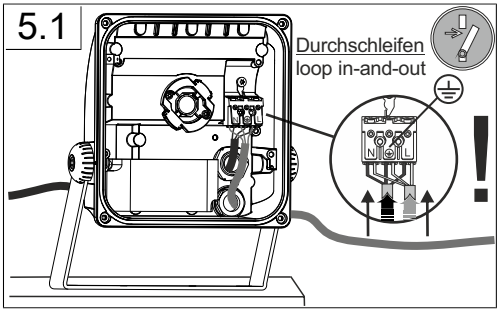
Durchschleifen
loop in-and-out
N
S
L


5.2

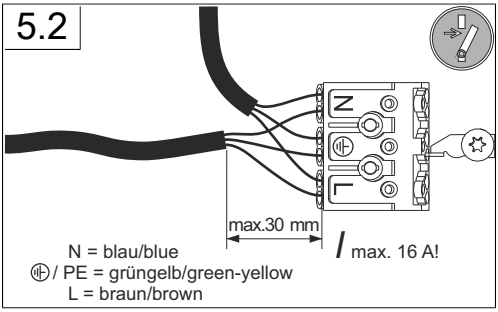
N
L
max.30 mm
max. 16 A!
N = blau/blue
PE / PE = grüngelb/green-yellow
L = braun/brown


6

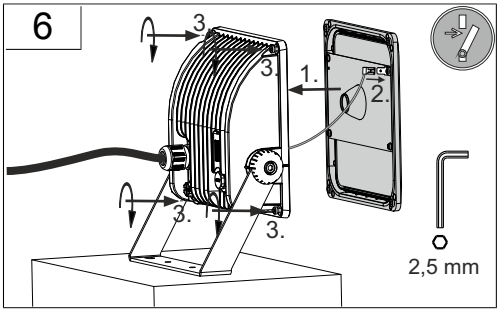
3.
3.
1.
2.
3.
3.
2,5 mm

7

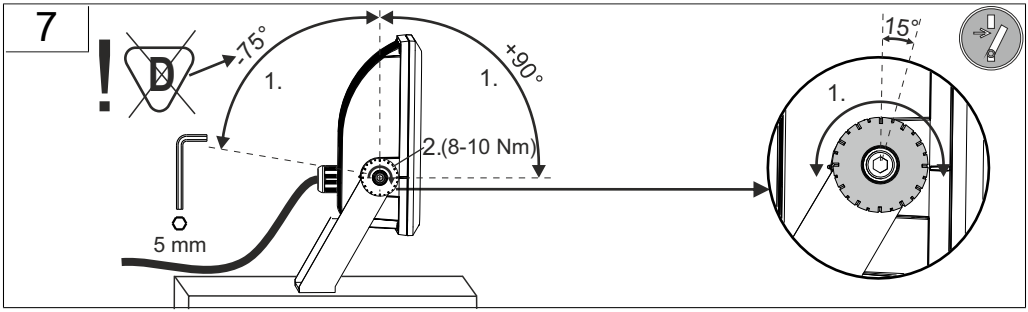
-75°
1.
1.
+90°
2.(8-10 Nm)
5 mm
15°
1.

8

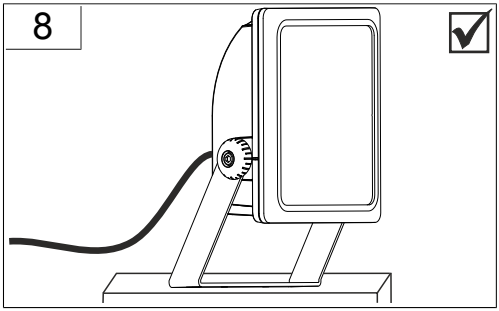


Hinweis zum Einsatz von Leuchten mit D-Kennzeichnung nach EN 60598-2-24


IP 4x		Umgebung ohne Staubablagerung
IP 5x		Umgebung mit nicht elektrisch leitender Staubablagerung
IP 6x		Umgebung mit elektrisch leitender Staubablagerung Maximale Umgebungstemperatur beim Einsatzt der Leuchte in solcher Umgebung beträgt nur 25° C!


Reference for application of lumiaires with D- marking according to EN 60598-2-24

IP 4x		Environment without dust deposit
IP 5x		Environment with non-electrically conductive dust deposit
IP 6x		Environment with electrically conductive dust deposit Maximum ambient temperature when using the luminaire in such an environment is only 25 ° C!

Indoor & Outdoor







	982058.000	L 500, B 180, H 180,	2,9 kg
	982058.0031	L 500, B 180, H 180,	2,9 kg
	982086.000	L 1000, B 180, H 180,	3,9 kg
	982086.0031	L 1000, B 180, H 180,	3,9 kg
	982047.000	L 250, B 95, H 153,	1,9 kg
	982047.0031	L 250, B 95, H 153,	1,9 kg
	982047.004	L 250, B 95, H 153,	1,9 kg
	982048.000	L 250, B 95, H 153,	2,2 kg
	982048.0031	L 250, B 95, H 153,	2,2 kg
	982048.004	L 250, B 95, H 153,	2,2 kg
	982049.000	L 250, B 114, H 153,	2,2 kg
	982049.0031	L 250, B 114, H 153,	2,2 kg
	982049.004	L 250, B 114, H 153,	2,2 kg
	982050.000	L 250, B 114, H 153,	2,5 kg
	982050.0031	L 250, B 114, H 153,	2,5 kg
	982050.004	L 250, B 114, H 153,	2,5 kg
	982090.000	L 178, B 174, H 38,	0,8 kg
	982091.000	L 178, B 194, H 38,	0,81 kg
	982367.009	D 22, H 38,	12 g

Instruction:

	981933.0031	L 175, B 170, H 13,	342 g
	981959.002	L 97, B 43, H 30	98 g
	982081.000	L 19, B 19, H 1	1 g