
LED2WORK
INTELLIGENCE IN LIGHT

LED Arbeitsplatzleuchte
LED workplace luminaire




SYSTEMLED TUNABLE WHITE, 898 mm, 3000~6500K, Abdeckung Mikroprismen


Artikel-Nr.:	141004-02
EAN:	4260556623191

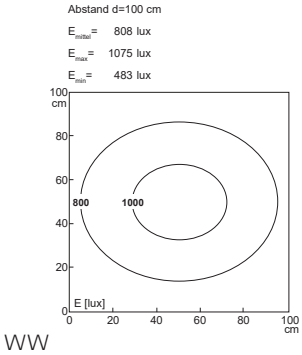

WW

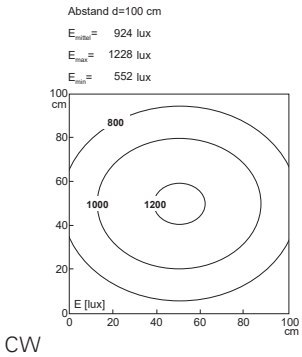

CW



Bestell-Nr.:	141004-02
Modell:	SYSTEMLED
Bauform:	LED Systemleuchte
Leuchtmittel:	SMD LED
Lampenleistung:	~49 W
Lampenlichtstrom:	3955 lm (6500K) / 3670 lm (2700K)
Lampenlichtausbeute:	96 lm/W
Lichtverteilung:	direkt
Lichtfarbe:	Einstellbar (3000... 6500K)
Anschlusswert Leuchte:	220-240V AC ± 10%, 50-60 Hz
Betriebsgerät:	integriert
Anschluss Leuchte:	Wieland GST18
Schutzart:	IP40
Schutzklasse:	I
Entblendung:	Prismenabdeckung
Abstrahlwinkel:	100°
Betriebstemperatur:	-10... +50 °C
Farbwiedergabe (Ra):	> 90/99
Lampenlebensdauer:	> 60.000 h
Material Gehäuse:	Aluminium
Höhe [B] x Breite [C]:	40 mm x 138 mm
Länge [A]:	898 mm
Gewicht:	2550 g
Bruttogewicht:	3500 g
Risikogruppe:	freie Gruppe
Befestigungszubehör:	optional
Dimmbar:	ja
Kennzeichnung:	CE
Gefertigt in:	Deutschland
Besonderheit:	stufenloser Wechsel der Farbe des Weißlichts, kaskadierbar, dimmbar

Elektrische Durchgangsverdrahtung (kaskadierbar): Mehrere Leuchten lassen sich elektrisch verketten. An die erste Leuchte werden 230V AC angelegt und mit Wieland GST18 Leitungen (Zubehör)weitere Leuchten über Ein- und Ausgänge im Leuchtengehäuse miteinander verbunden. Die Gesamtstromstärke der verketteten Leuchten darf dabei nicht die Absicherung des betriebsseitigen 230V AC Anschlusses übersteigen.

Lampenlebensdauer in Betriebstunden (L80/B10)

2021_V2_LED2WORK_Datenblatt Arbeitsplatzleuchte Doppelreihe 14. 4. 2022, 11:28


LED2WORK GmbH | Stuttgarter Straße 13 A | 75179 Pforzheim | Germany
T: +49 7231 44920-00 | info@led2work.com | www.led2work.com | Shop.led2work.com

LED Arbeitsplatzleuchte
LED workplace luminaire




SYSTEMLED TUNABLE WHITE, 898 mm, 3000~6500K, micro prisms cover


Item number:	141004-02
EAN:	4260556623191

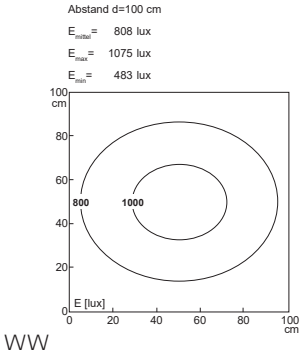

WW

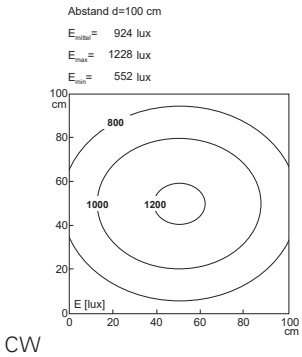

CW



Order number:	141004-02
Model:	SYSTEMLED
Type:	LED system luminaire
Illuminant:	SMD LED
Power consumption:	~49 W
Lamp luminous flux:	3955 lm (6500K) / 3670 lm (2700K)
Lamp luminous efficiency:	96 lm/W
Light distribution:	direct
Light colour:	adjustable (3000... 6500K)
Connected load:	220-240V AC ± 10%, 50-60 Hz
Power supply:	inbuilt
Connection (connector):	Wieland GST18
Degree of protection:	IP40
Class of protection:	I
Glare-free	microprism
Beam angle (optics):	100°
Operating temperature:	-10... +50 °C
Colour rendering (Ra):	> 90/98
Lamps lifetime:	> 60,000 h
Housing material:	aluminium
Height [B] x Width [C]:	40 mm x 138 mm
Length [A]:	898 mm
Weight (net):	2550 g
Gross weight:	3500 g
Risk group (DIN EN 62471):	free group
Mounting accessories:	optional
Dimmable:	yes, via optional accessories
Marking:	CE
Made in:	Germany
Feature:	stepless switch of the white light colour, cascadable, dimmable

You can interlink several luminaires electrically (cascadable). 230V mains voltage is applied to the first luminaire and additionally Wieland extension cables are used to connect further luminaires to each other via the inputs and outputs in the luminaire housing. The total current of the interlinked luminaires must not exceed the fuse rating of the 230V connection on the operating side.

Lamps lifetime in operation hours (L80/B10)

2021_V2_LED2WORK_Datenblatt Arbeitsplatzleuchte Doppelseite hr. 14. 4. 2022, 11:28

LED2WORK GmbH | Stuttgarter Straße 13 A | 75179 Pforzheim | Germany
T: +49 7231 44920-00 | info@led2work.com | www.led2work.com | Shop.led2work.com