


LED converter 700 mA, DALI dimmable, (digital)
Article no. 17783010

Light.
For Generations.

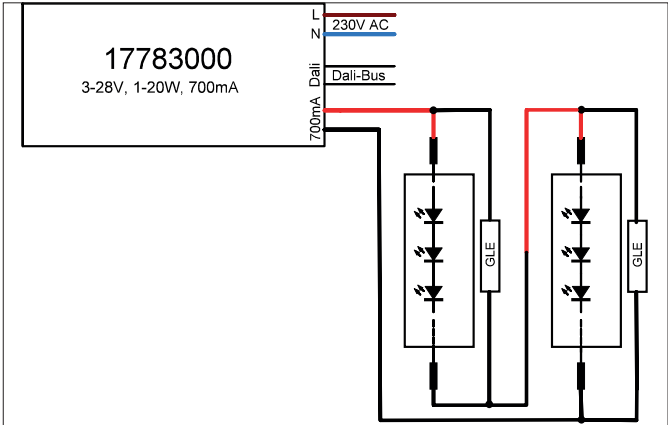

Tender
LED converter 700 mA, DALI dimmable, (digital), , Rectangular.This converter is equipped with safety devices which protect it against over-voltage, short-circuit as well as thermal and electric overloads. The input and output terminals are suitable for cables with a cross-section of up to 0.75-1.5 mm². Material: Plastic, Degree of protection: according to DIN EN 60529 IP20, Protection class: (EN 61140) II, Current: 700 mA, Voltage: 230V AC 50Hz , Power: 20 W, Dimmable: Yes, Control: DALI-2 .

Article data	
Article no.	17783010
GTIN	4251433924159
Short description	LED converter 700 mA, DALI dimmable, (digital)
Material	Plastic
Shape	Rectangular
Length	110 mm
Width	52 mm
Hight	22 mm
Weight	0.107 kg
stamp	ENEC 05, MM, EL

LED converter 700 mA, DALI dimmable, (digital)

Article no. 17783010

Light.
For Generations.

Operating technology of driver	
AC nominal voltage min	99 V
AC nominal voltage max	264 V
Frequency min	50 Hz
Frequency max	60 Hz
DC nominal voltage min	176 V
DC nominal voltage max	280 V
Protection class	II
Degree of protection	IP20
Power min	2.1 W
Power	20 W
Output_ripple_current	3
Starting current	5A 50µs
Suitable for emergency lighting	No
measure point (tc)	75 °C
Version	without
Power factor	0.95
Output voltage max	28.00 V
Output voltage min	3.00 V
Control	DALI-2
Number of poles	4
Environment temperature (ta)	-25 °C up to +45 °C
Measure point (tc)	max. +75 °C
Output current	700 mA

Packing data	
Gross weight	0.127 kg
Length of packaging	60 mm
Packaging width	27 mm
Packaging height	150 mm
Disposal at end of life	This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately. By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.