

INSTRUCTION

Andho
931196.002.76



RZB
LIGHTING

~ 220 - 240 V 50/60 Hz IP 65 IK06




5 x 2,5 mm²



2,50 mm²



Umgebungstemperatur /
temperature ambiante
=> -20 °C ... + 40 °C



D 154, H 157



LED



2,6 kg

Φ [lm]

2000

P [W]

15

P

1 x 20 W

CCT [K]

3000

CRI

80

RG

RG 1

EEK

A++

EEK

A++



18 A / 250 µs



21



34




35



57

P_f

0,9



INSTRUCTION
WARTUNGSPLAN/
MAINTENANCE
SCHEDULE

DIN EN 61340-5-1




EN 12464
EN 13201



EN 12464
EN 13201




INSTRUCTION
WARTUNGSPLAN/
MAINTENANCE
SCHEDULE



100%

EN 12464











H₂O

2020-10-29


www.rzb.de

1

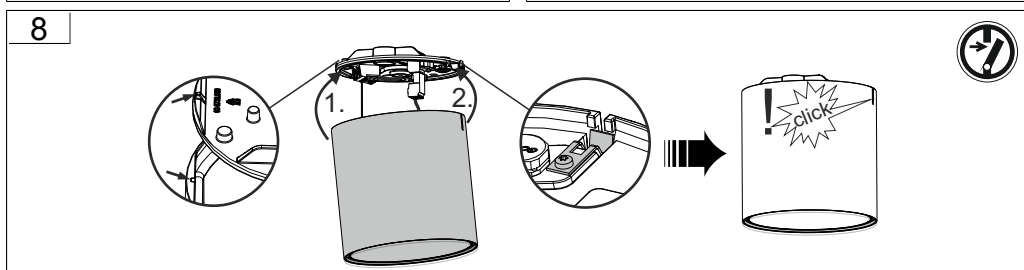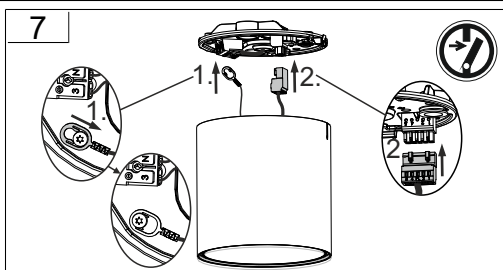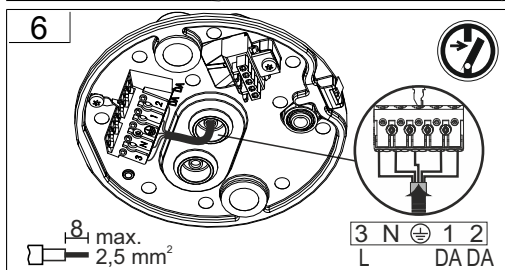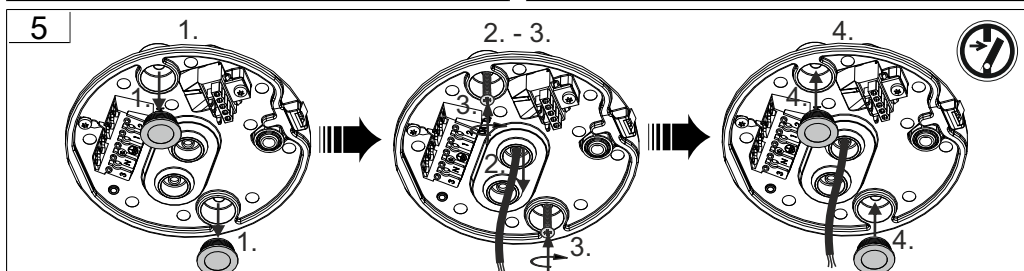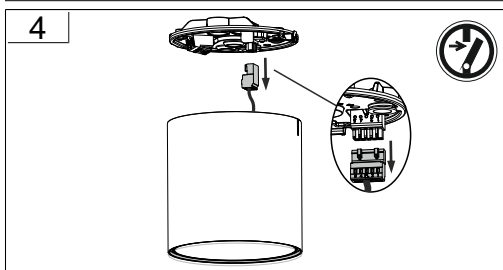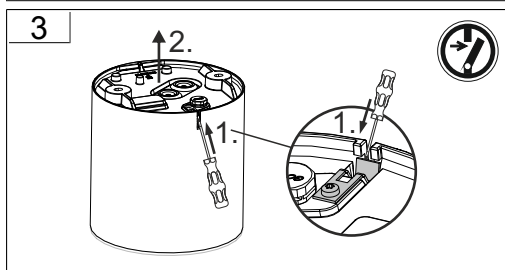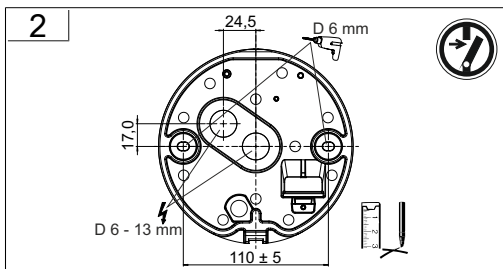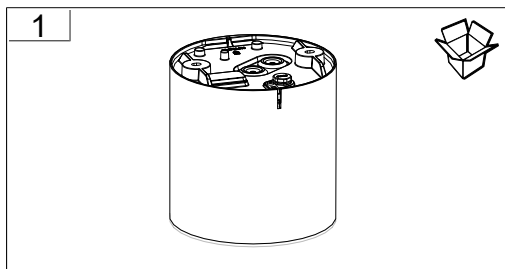



9






Bei Fragen zu unseren Symbolen,
besuchen Sie folgende Webseite:

If you have any questions about our
signs, visit the following website:




www.rzb.de/fileadmin/assets/downloads/PDF/RZB_Symbolklaerung.pdf



	982160.006	Farbfilter blau Colour filter blue	D 160, H 58	400 g
	982160.007	Farbfilter gelb Colour filter yellow	D 160, H 58	400 g
	982160.0077	Farbfilter grün Colour filter green	D 160, H 58	400 g
	982160.008	Farbfilter rot Colour filter red	D 160, H 58	400 g
	982716.002	Pendelset Pendant set	D 72, H 175, LP 3000	0,8 kg
	982720.002	Pendelset Pendant set	D 72, H 175, LP 5000	1 kg





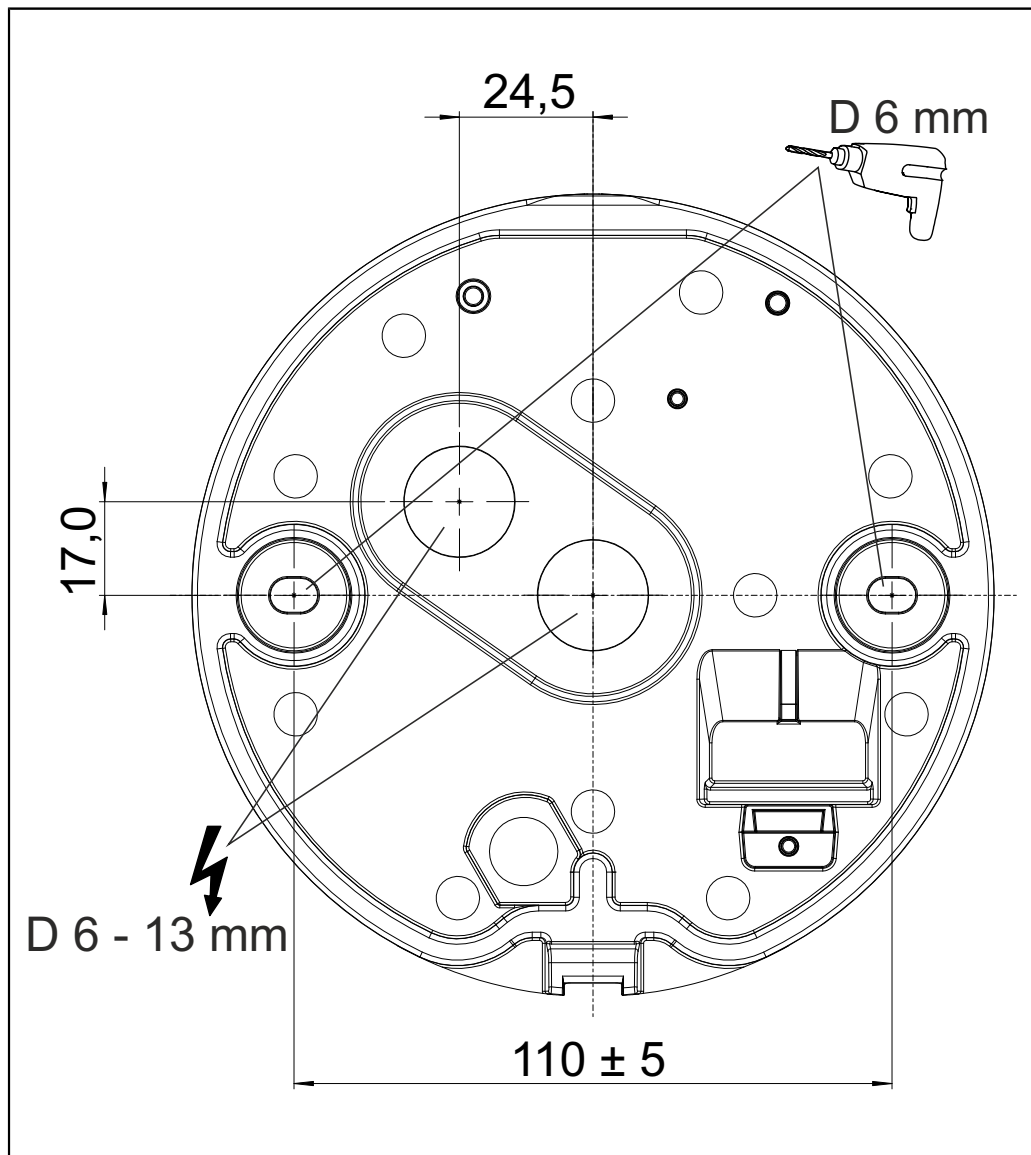

RZB - Rudolf Zimmermann, Bamberg GmbH

Rheinstraße 16
96052 Bamberg

Telefon: 0951/7909-0
Telefax: 0951/7909-198

E-mail: info@rzb-leuchten.de