


APP 10.5040.1.1/DALI

Appareo Linear (1xLED 39W 840/4000K 5490lm)

— C0/C180 cd / 1000 lm - - - C90/C270

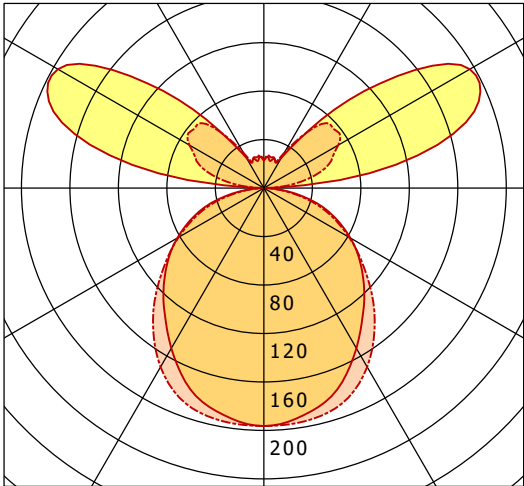

	C0	C90	C180	C270
0°	196	196	196	196
30°	153	170	153	170
60°	82	81	82	81
90°	2	1	2	1
120°	196	71	196	71
150°	29	33	29	33
180°	23	23	23	23
cd / 1000 lm				

LDC unsuitable for cone representation.
The C0 angle is oversized.

η	LED
Efficiency	141 lm/W
Direct/Indirect	↓ 56% / ↑ 44%
System Power	39 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	16.2
UGR C90/C270	15.9
CIE Flux Codes	46 77 95 56 100
Ra/CRI	> 80