DATENBLATT

Wallwasher Q1




Orientierungsleuchte mit SMD-LEDs

Merkmale:

- Quadratische Wandeinbauleuchte für Akzent- oder Effektbeleuchtung
- Die Reflektorform sorgt für eine Wandflutercharakteristik
- Als Zubehör ist eine tiefe Einbaudose Q1 erhältlich

Technische Daten	**LED Wandeinbauleuchte**			
Bezeichnung	Wallwasher Q1			
Artikel Nr.	1731101017	1731101090	1731104117	1731104190
Farbe	weiß		titan-matt	
Lichtfarbe	kaltweiß	multicolor	kaltweiß	multicolor
Farbtemperatur	ca. 6500 K	-	ca. 6500 K	-
Leuchtmittel	SMD-LEDs			
Nennspannung	24V DC			
Nennstrom	max. 0,025A	max. 0,075A	max. 0,025A	max. 0,075A
Nennleistung	0,6W	1,8W*	0,6W	1,8W*
Material	Stahlblech/Aluminium			
RGB interface	COM-			
Schutzklasse	III			
Schutzart	IP20			
Für Außenbereich geeignet	nein			
Abmessungen (LxB)	94x94 mm			
Ausschnitt (LxB)	90x90 mm			
Einbautiefe	26 mm			
Lichtaustrittsöffnung (LxB)	59x59 mm			
Gewicht	ca. 310 g			
Leuchtenanschluss	1 m Anschlussleitung mit Rast-Stecksystem 2-polig	4-polig	2-polig	4-polig
Mittlere Lebensdauer der LEDs	50000 Std. (lt. LED Herstellerangaben)			
Prüfzeichen	MM			
CE-Konformität	ja			
Betriebsgerätempfehlung	nobilé Betriebsgerät der EL-24V Serie und bei Multicolor-Leuchten zusätzlich ein LED RGB-Sequenzer			

*Bei Betrieb mit nobilé Sequenzer Leistungsaufnahme max. 1,2W

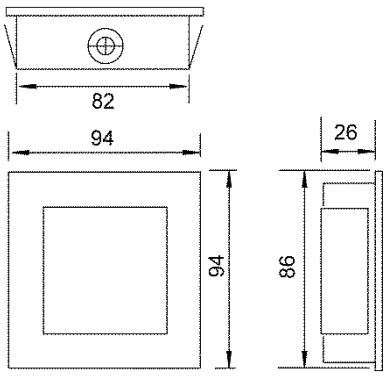

Technische Änderungen vorbehalten.

nobilé AG – Wächtersbacher Str. 78
D-60386 Frankfurt/M. Germany
Tel: +49 (0) 69/ 962205-0
www.nobile.de

rev. 0.0 – 01.07.2013

DATA SHEET

Wallwasher Q1




Orientation light with SMD-LEDs

Features:

- Square wall recessed luminaire for accent or effect lighting
- The reflector shape cares for a wallwasher characteristics
- Deep installation housing Q1 available as an accessory

Specifications	**LED Recessed Wall Luminaire**			
Type	Wallwasher Q1			
Part no.	1731101017	1731101090	1731104117	1731104190
Colour	white		matt titanium	
Light colour	cool white	multicolour	cool white	multicolour
Light temperature	ca. 6500 K	-	ca. 6500 K	-
Light source	SMD-LEDs			
Rated voltage	24V DC			
Rated current	max. 0.025A	max. 0.075A	max. 0.025A	max. 0.075A
Rated power	0.6W	1.8W*	0.6W	1.8W*
Material	steel sheet/aluminium			
RGB interface	COM-			
Safety class	III			
Protection class	IP20			
For outdoor use	no			
Dimensions (LxW)	94x94 mm			
Cut-out (LxW)	90x90 mm			
Installation depth	26 mm			
Light portal opening (LxW)	59x59 mm			
Weight	ca. 480 g			
Connection of luminaire	1 m cable with reverse polarity protected and lockable plug-system 2-pole	4-pole	2-pole	4-pole
Average lifetime of LEDs	50000 hrs (according to LED manufacturer's data)			
Signs	MM			
CE-Conformity	yes			
Recommendation LED driver	nobilé driver of the EL-24V series and in case of Multicolour lights, in addition, an LED RGB-sequencer			

*Operated with nobilé sequencer: power output max. 1.2W

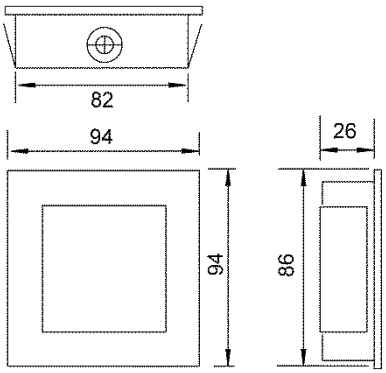

Specifications are subject to change without prior notice.

nobilé AG – Wächtersbacher Str. 78
D-60386 Frankfurt/M. Germany
Tel: +49 (0) 69/ 962205-0
www.nobile.de

rev. 0.0 – 01.07.2013