



Recessed downlight, IP65, GX5,3
Artikel-Nr. 20368150

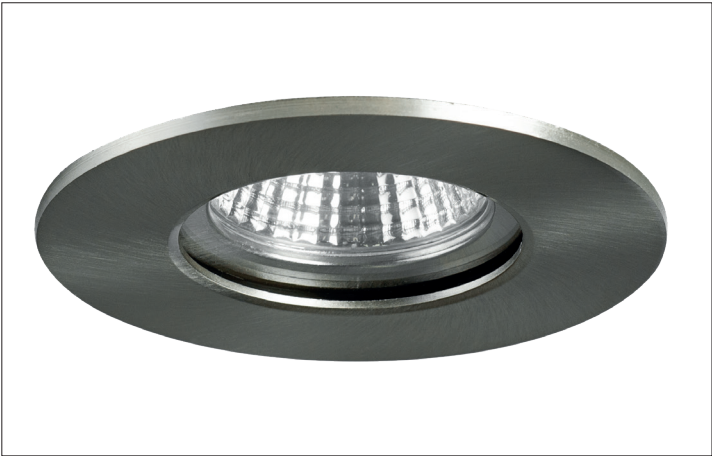

Recessed downlight, IP65, GX5,3, nickel, round. In a compact design, for installation in tool-less rapid assembly systems Lamp holder: GX5.3, Mounting method: Recessed mounting, Place of installation: Ceiling-mounted, Material: Aluminium / Glass, Degree of protection: according to DIN EN 60529 IP65*, Protection class: (EN 61140) III, Voltage: 12V, Power: 35W, Amount of light sources / fittings: 1.0 Qty, Light colour : White, Control: Dimming depending on driver.

Artikel-Nr.	20368150
Stand:	26.10.2021 03:25

Colour	Nickel
Amount of light sources / fittings	1 Qty
Material	Aluminium / Glass
Lamp holder	GX5.3
Power	max. 35 W
Lamp	for LED-retrofill lamp
Control	Dimming depending on driver
Outer diameter	90 mm

Built-in diameter	75 mm
Installation depth	55 mm
Voltage	12V
Degree of protection	IP65*
Protection class	III
Circlip	Without circlip
Circuit type	Parallel conduction