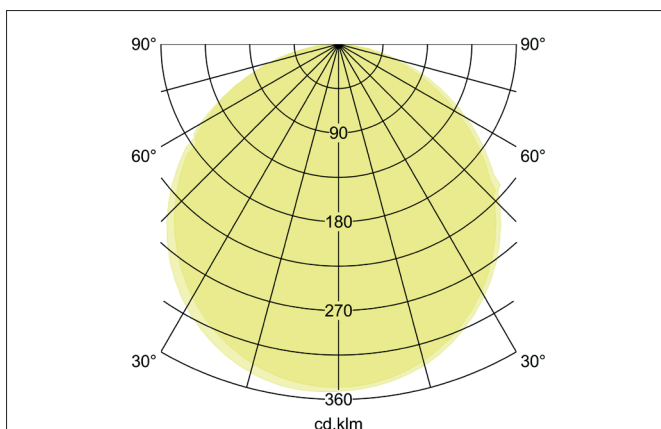
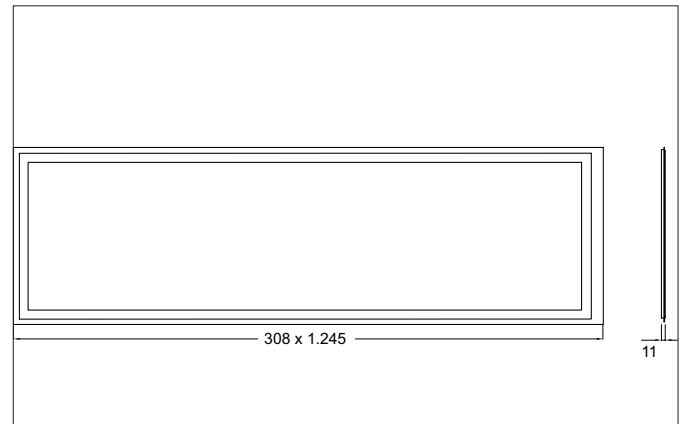


OREN LED panel 1.245 x 308 mm opal DALI-2

Article no. 32063074

Light.
For Generations.**Tender**

LED panel 1.245 x 308 mm opal DALI-2, Rectangular. Recessed luminaire for ceilings with visible mounting rails. Ceiling cut-out L x W 1227 x 290 mm, Installation depth 40 mm, Length 1.245 mm, Width 308 mm, Weight 3,500 kg, with rotationssymmetrical, deep, wide distributed light intensity. Cover plastic, microprismatic. Luminous flux 4.900 lm, UGR < 22, Power 1 x 33 W, Light colour neutral white, Correlated color temperature (CCT) 4.000 K, Colour rendering index CRI > 80, Rated life time L70/B10 at 25 °C: 110.000 h, Rated life time L70/B50 at 25 °C: 125.000 h, Rated life time L80/B10 at 25 °C: 78.000 h, Rated life time L80/B50 at 25 °C: 100.000 h, Housing material: Aluminium / PMMA, Colour: White, Permissible ambient temperature (ta): -20°C to +45°C, Protection class (EN 61140): II, Degree of protection (DIN EN 60529): IP20, shock resistance according to IEC62262: IK04 .With electronic driver, DALI-2 dimmable.

OREN LED panel 1.245 x 308 mm opal DALI-2

Article no. 32063074

Light.
For Generations.

Article data	
Article no.	32063074
GTIN	4251433998372
Series name	OREN
Short description	LED panel 1.245 x 308 mm opal DALI-2
Material	Aluminium / PMMA
Colour	White
Shape	Rectangular
Built-in width	290 mm
Built-in length	1227 mm
Installation depth	40 mm
Length	1,245 mm
Width	308 mm
Hight	11 mm
Scope of delivery	incl. multilumen DALI-2 / PUSH-dimm driver. 300 mA bis 1.050 mA (in steps of 50)
Weight	3.500 kg
stamp	ENEC, D-Kennzeichen
Conformance	CE, UKCA

Lighting technology	
Colour temperature	4.000 K
Light colour	White
Light output	Direct
Luminous flux	4,900 lm
System efficiency	129 lm/W
McAdam-Step	McAdam-Step 3
Colour rendering	CRI > 80
Reflector	Without
Beam angle	120°
Glare evaluation	UGR < 22
Light sharing	Symmetric
Photobio. Risk group according to EN 62778	RG0
Adjustable color temperature	No

Operating technology of the luminaire	
System output	38 W
Voltage type	AC/DC
AC nominal voltage min	198 V
AC nominal voltage max	264 V
DC nominal voltage min	176 V
DC nominal voltage max	276 V
Frequency max	60 Hz
Frequency min	50 Hz
Lamp	LED
Lamp holder	Without fitting
Protection class	II
Degree of protection	IP20
Ambient temperature	-20°C to +45°C
Dimmable	Yes
Control	DALI-2 , PUSH-Dimm
Bulb change possible	The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person.
Glow wire test according to IEC 60695-2-12	650°C
Rated life time L70/B50 at 25 °C	125.000 h
Rated life time L80/B10 at 25 °C	78.000 h
Rated life time L80/B50 at 25 °C	100.000 h
Rated life time L90/B10 at 25 °C	30.000 h

OREN LED panel 1.245 x 308 mm opal DALI-2

Article no. 32063074

Light.
For Generations.

Operating technology of the luminaire	
Hight	11 mm
Lamp holder	Without fitting
Power	38 W
Voltage type	DC
Current	1.050 mA
Lamp	LED
Protection class	III
Degree of protection	IP40
Rated life time L70/B50 at 25 °C	100,000 h
Bulb change possible	The light source of this luminaire may only be replaced by the manufacturer or a service technician commissioned by him or a similarly qualified person.

Mounting technology	
Mounting method	Recessed mounting
Place of installation	Ceiling-mounted
Adjustability	Not adjustable
Impact resistance	IK04
Further references	No cover with thermal insulation material
Material cover	Plastic, microprismatic
Suitable for through-wiring	Yes

Packing data	
Gross weight	3.9 kg
Length of packaging	1,270 mm
Packaging width	360 mm
Packaging hight	35 mm
Disposal at end of life	This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately. By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.

OREN LED panel 1.245 x 308 mm opal DALI-2

Article no. 32063074

Light.
For Generations.

Accessories
Article no.: 81032063 Installation frame 1-piece, 1,303 x 366 x 30 mm, white Dimensions: 1,300 mm x 365 mm x 30 mm https://www.brumberg.com/fileadmin/products/Datenblatt_81032063_2021_DE.pdf
Article no.: 81032064 Mounting frame 4-piece, 1,265 x 328 x 50 mm, white Dimensions: 1,265 mm x 328 mm x 50 mm https://www.brumberg.com/fileadmin/products/Datenblatt_81032064_2021_DE.pdf
Article no.: 81032069 Y-rope suspension set of 1 300/308mm Dimensions: 2,000 mm https://www.brumberg.com/fileadmin/products/Datenblatt_81032069_2021_DE.pdf
Article no.: 00532900 Installation spring set of 4 for LED panel https://www.brumberg.com/fileadmin/products/Datenblatt_00532900_2021_DE.pdf
Article no.: 17840010 LED-Konverter 800 mA - 1.050 mA, schaltbar, zur Durchgangsverdrahtung Leistung: 42 W Dimensions: 170 mm x 65 mm x 30 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17840010_2021_DE.pdf
Article no.: 17843010 LED-Konverter 1.050 mA, Phasenabschnitt dimmbar Leistung: 39,9 W Dimensions: 142 mm x 31.5 mm x 60 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17843010_2021_DE.pdf
Article no.: 17844010 LED-Konverter 900 mA - 1.050 mA, 1-10 V dimmbar Leistung: 44,1 W Dimensions: 180 mm x 40 mm x 30 mm https://www.brumberg.com/fileadmin/products/Datenblatt_17844010_2021_DE.pdf