BRUMBERG

LED recessed profile BIRO40

Artikel-Nr. 77024698

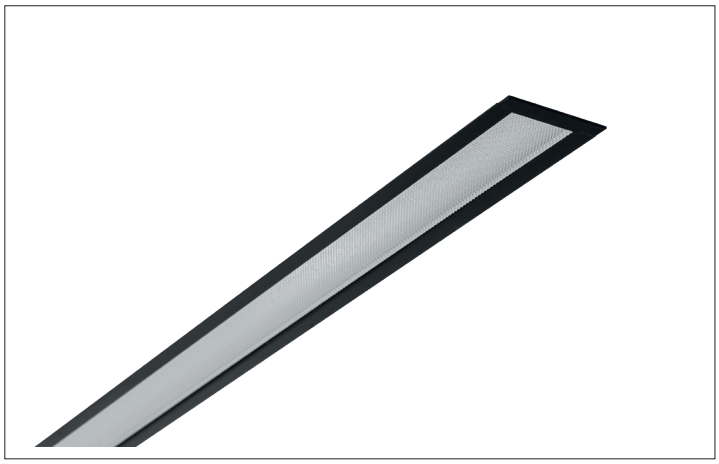







LED recessed profile BIRO40, silver, rectangular. LED light channel with microprismatic cover. Lamp holder: LED, Mounting method: Recessed mounting, Place of installation: Ceiling-mounted, Material: Aluminium / Acrylic, Degree of protection: according to DIN EN 60529 IP20, Protection class: (EN 61140) I, Voltage: 230V AC 50Hz, Power: 35.8W, Luminous flux: 3.030lm, Colour temperature: from 2700 K up to 6500 K, Light colour : White, Beam angle: 80°, Adjustability: Not adjustable, With control gear: Yes.

Artikel-Nr.	**77024698**
Stand:	20.07.2021 03:45

control	DALI
Colour	Silver
Colour of light	2700 K - 6500 K
Glare evaluation	UGR < 19
System efficiency	84 lm/W
Luminous flux	3,030 lm
Material cover	Microprismatic
Length	2278 mm
Built-in length	1160 mm
Colour rendering	CRI > 80
Beam angle	80 °

Width	59 mm
Built-in width	45 mm
Installation depth	110 mm
Material	Aluminium / Acrylic
Voltage	230V AC 50Hz
Lamp	LED
Light output	Direct
Degree of protection	IP20
Protection class	I
Voltage type	AC
Adjustability	Not adjustable

Alle technischen Daten wie Lichttechnische-, Gewichts- und Maßangaben basieren auf Bemessungswerten und sind sorgfältig erstellt. Die mögliche Toleranz der Farbtemperatur beträgt +/- 150K. Die Leistung und Lichtstrom unterliegen initial einer Toleranz von +/- 10%.Die Werte gelten, wenn nicht anders beschrieben, für eine Umgebungstemperatur von 25°C. Technische Änderungen und Irrtümer vorbehalten. Alle Preisangaben verstehen sich als (UVP) in Euro ohne MwSt. Bestellung erfolgt zu unseren Allgemeinen Verkaufsbedingungen unter www.brumberg.com/de/agb/allgemeine-verkaufsbedingungen/.