

INSTRUCTION

Flat Basic
211401.002



RZB
LIGHTING


~ 220 - 240 V 50/60 Hz IP 43, IP 44 IK03



3 x 1,5 mm²



2,50 mm²



D 500, H 150



LED



1 x 21 W



2150



21



A+



A+



5,92 kg

CCT [K]

3000

CRI

83

RG

RG 1



0,22 A / 200 µs



84



135



84



135





DIN EN 61340-5-1




EN 12464
EN 13201




EN 12464
EN 13201




EN 12464




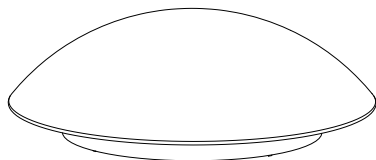


2

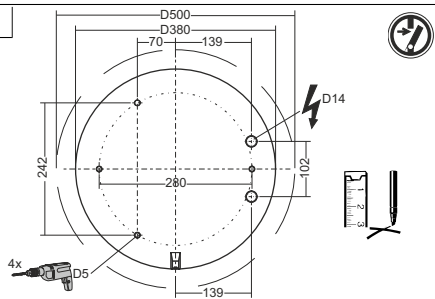


3



4




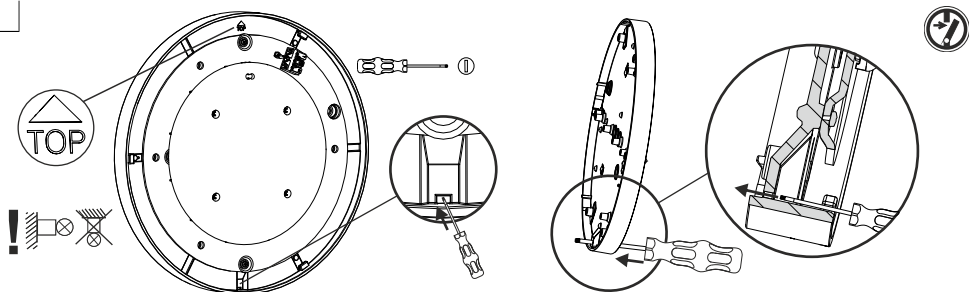


5

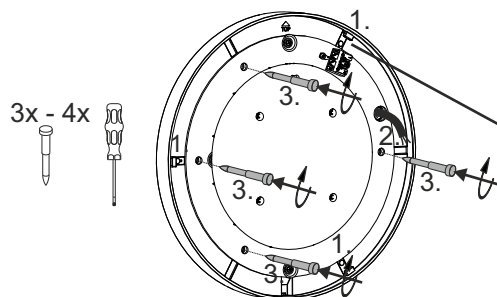

1. intakte Kappen!
faultless covers!



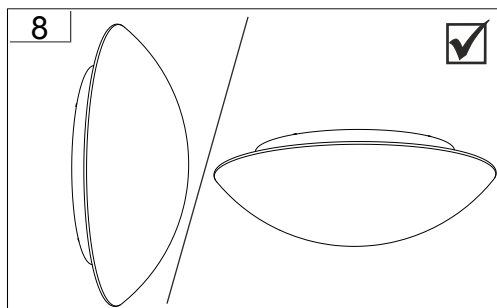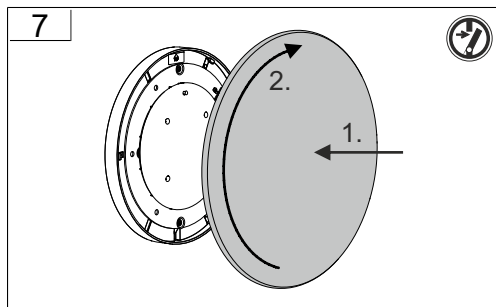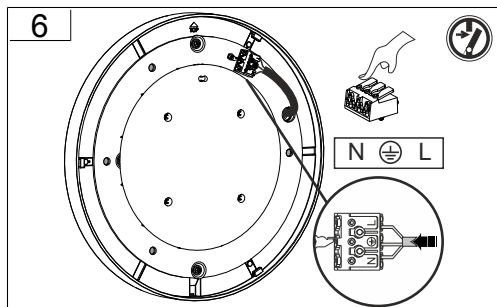



Bei Fragen zu unseren Symbolen, besuchen sie folgende Webseite:
If you have any questions about our signs, visit the following website:

www.rzb.de/fileadmin/assets/downloads/PDF/RZB_Symbolklaerung.pdf





05-211071.002

D 500, H 129

3,8 kg





