


BRUMBERG


LED recessed downlight, IP65

Artikel-Nr. 13368153

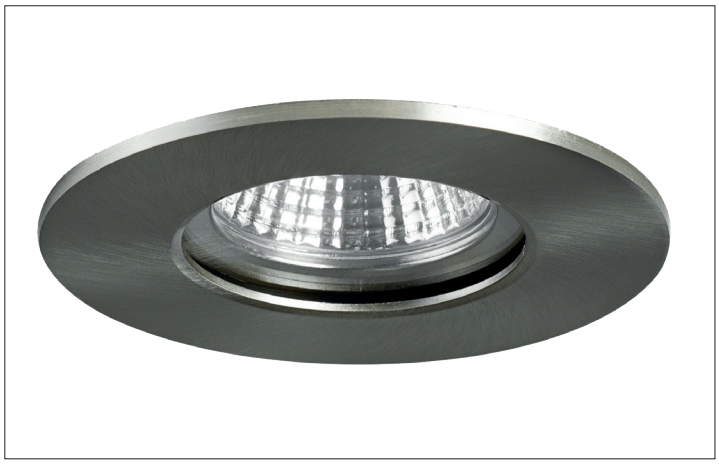







LED recessed downlight, IP65, nickel, round. In a compact design, for installation in tool-less rapid assembly systemsLamp holder: Plug&Play, Mounting method: Recessed mounting, Place of installation: Ceiling-mounted, Material: Aluminium / Glass, Degree of protection: according to DIN EN 60529 IP65*, Protection class: (EN 61140) III, Current: 350 mA, Power: 6W, Amount of light sources / fittings: 1.0 Qty, Luminous flux: 680lm, Colour temperature: 3.000 K, Light colour : White, Beam angle: 38°, Adjustability: Not adjustable, With control gear: No, Control: Dimming depending on driver.

Artikel-Nr.	**13368153**
Stand:	26.10.2021 01:38

Colour temperature	3000 K
Colour	Nickel
Beam angle	38 °
Amount of light sources / fittings	1 Qty
Material	Aluminium / Glass
Lamp holder	Plug&Play
Power	6 W
Lamp	LED
Colour rendering	CRI > 80
Control	Dimming depending on driver

Outer diameter	90 mm
Built-in diameter	75 mm
Installation depth	50 mm
Current	350 mA
Degree of protection	IP65*
Protection class	III
Circlip	Without circlip
Adjustability	Not adjustable
Circuit type	Series conduction

Alle technischen Daten wie Lichttechnische-, Gewichts- und Maßangaben basieren auf Bemessungswerten und sind sorgfältig erstellt. Die mögliche Toleranz der Farbtemperatur beträgt +/- 150K. Die Leistung und Lichtstrom unterliegen initial einer Toleranz von +/- 10%.Die Werte gelten, wenn nicht anders beschrieben, für eine Umgebungstemperatur von 25°C. Technische Änderungen und Irrtümer vorbehalten. Alle Preisangaben verstehen sich als (UVP) in Euro ohne MwSt. Bestellung erfolgt zu unseren Allgemeinen Verkaufsbedingungen unter www.brumberg.com/de/agb/allgemeine-verkaufsbedingungen/.