

INSTRUCTION

10/2016

RZB
LIGHTING

Terra Edelstahl 245

641288.000.1





IP 68 IK10



220 - 240 V / 50 - 60 Hz



3 x 1,5 mm²

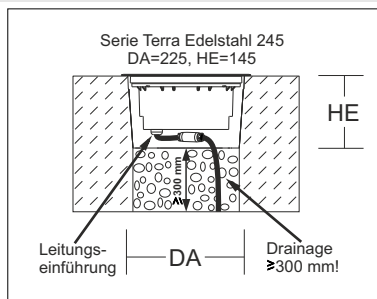

641288.000.1

L 245, B 245, H 2

DA 225, HE 145

LED

28 W

3,47 kg



EEK_{LED}

EEK

CRI

CCT


2200 lm

A+

A+

80


4000K



30

50

5 A



Die Leuchte darf nur mit ihren vollständigen Schutzabdeckungen betrieben werden.
The luminaire must be used with its complete protective covers only.

EN 12464



EN 12464



EN 12464


Wartungsplan/
Maintenance
schedule



RZB
Rudolf Zimmermann,
Bamberg GmbH
Rheinstraße 16
D-96052 Bamberg
Deutschland
Telefon +49 951/79 09-0
Telefax +49 951/79 09-198
www.rzb.de
info@rzb-leuchten.de





1

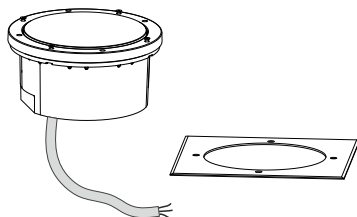

2


Serie Terra Edelstahl 245
DA=225, TE=145



3




ausrichten!
align!




4

H07-RN8-F
3x1,0mm²

1. IP68!




5



Inbus
5 mm



6




ST 3,9






7




drinnen die Sauberkeit kontrollieren, den Schmutz entfernen! /
check the cleanliness, remove the dirt inside!

8




Inbus
5 mm

9



Inbus
2,5 mm


10



641287.XXX
641288.XXX
641289.XXX

Inbus
2,5 mm




11





! 0.5 m

Der Abstand zu beleuchteten Gegenständen muss mindestens 0.5 m betragen!
The distance to the direct illuminated objects must be at least 0.5 m!

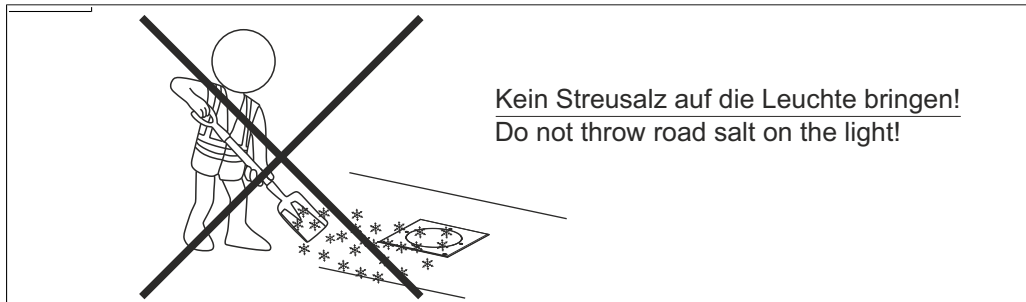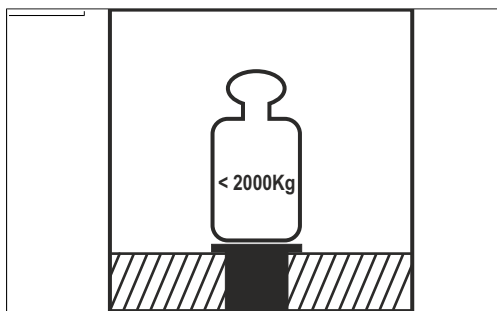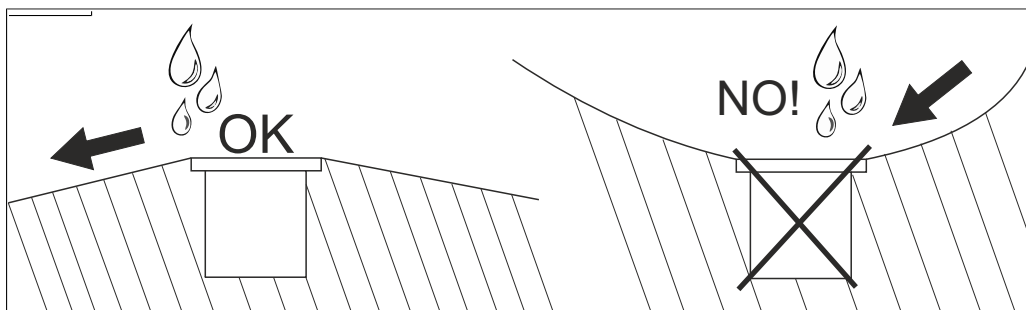

Kein Streusalz auf die Leuchte bringen!
Do not throw road salt on the light!

  			
	982015.003	D 130, H 19	60 g
	982014.010	Ersatzscheibe D 185	950 g
	982011.000	D 220, H 130, DA 225	475 g
	982012.000	D 302, H 320, DA 225	2,2 kg
	982013.000	D 300, H 60	650 g
	982016.000	D 234, H 134, DA 230	870 g

  			
	982014.000	Ersatzscheibe D 185	952 g

Instruction:



10/2016



Instruction:



10/2016



Instruction:



10/2016

