

INSTRUCTION

46-2016

RZB
LIGHTING

Lightstream LED

721720.1131.1.76



IP 65 IK05





220 - 240 V / 50/60 Hz



5 x 2,5 mm²



2,50 mm²

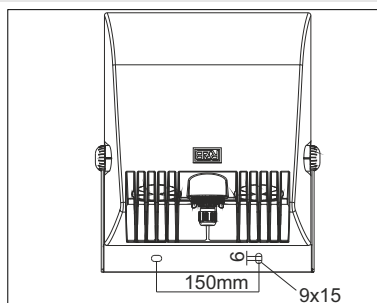

721720.1131.1.76 L 382, B 330, H 215

LED

114 W

6,26 kg



EEK_{LED}

EEK

CRI

CCT


12400 lm

A++

A++

80

4000K



5

8

8

13

35 A



Die Leuchte darf nur mit ihren vollständigen Schutzabdeckungen betrieben werden.
The luminaire must be used with its complete protective covers only.

EN 12464











EN 12464



EN 12464
Wartungsplan/
Maintenance
schedule




RZB
Rudolf Zimmermann,
Bamberg GmbH
Rheinstraße 16
D-96052 Bamberg
Deutschland
Telefon +49 951/79 09-0
Telefax +49 951/79 09-198
www.rzb.de
info@rzb-leuchten.de

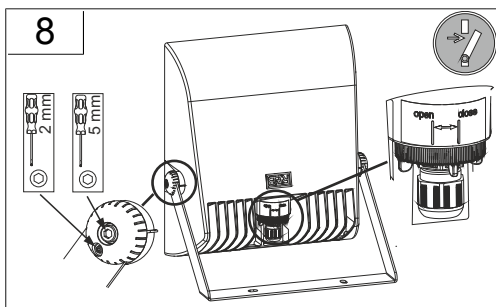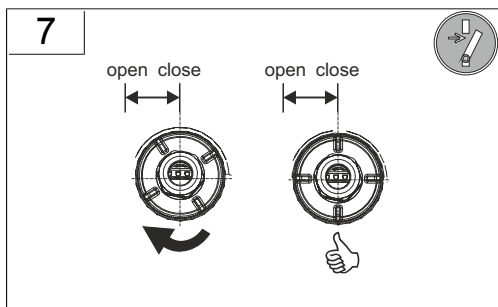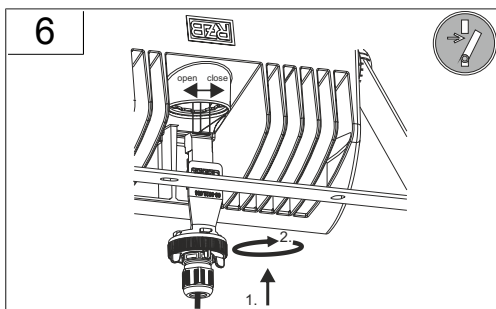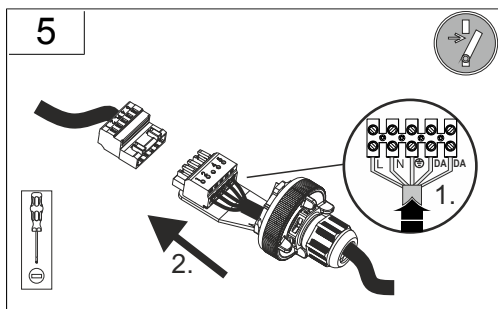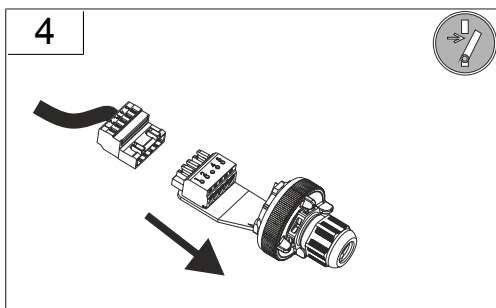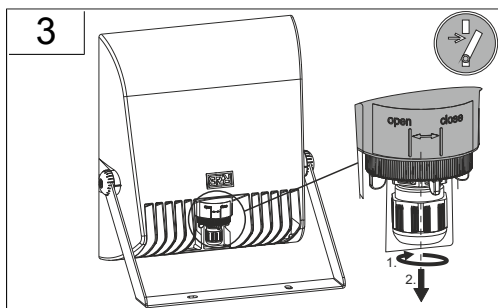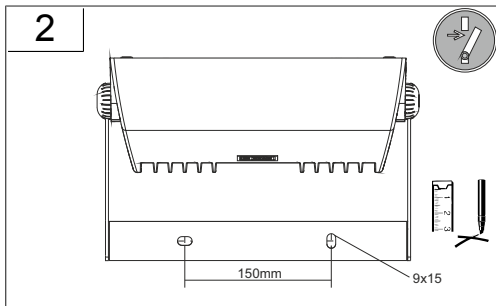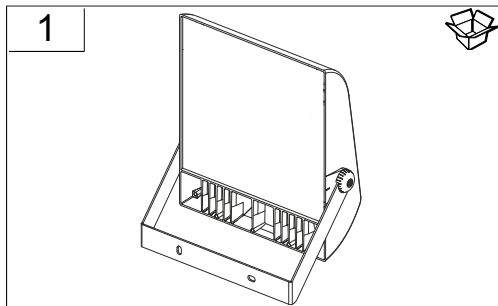





9







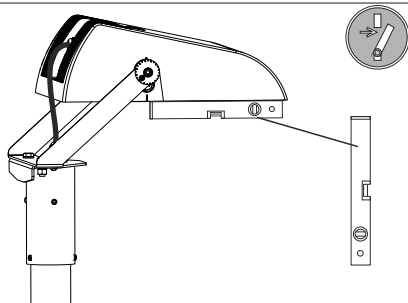


10

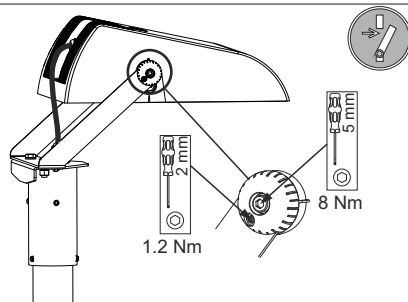


11

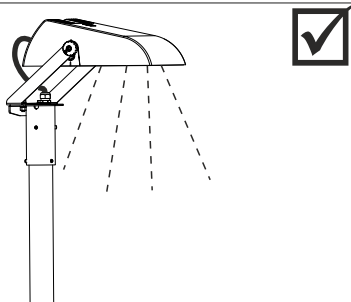

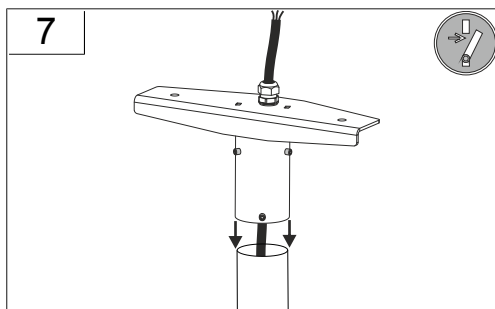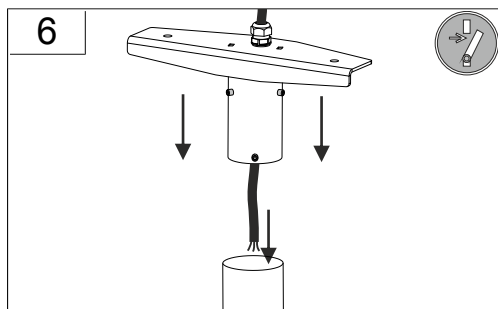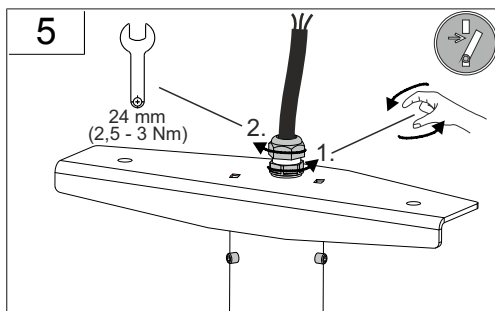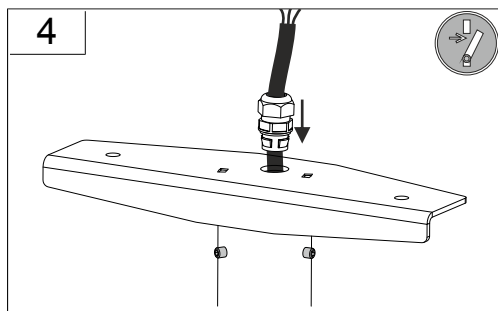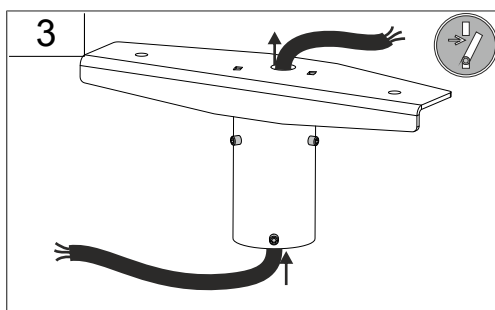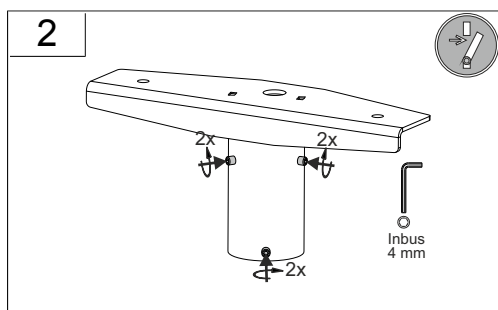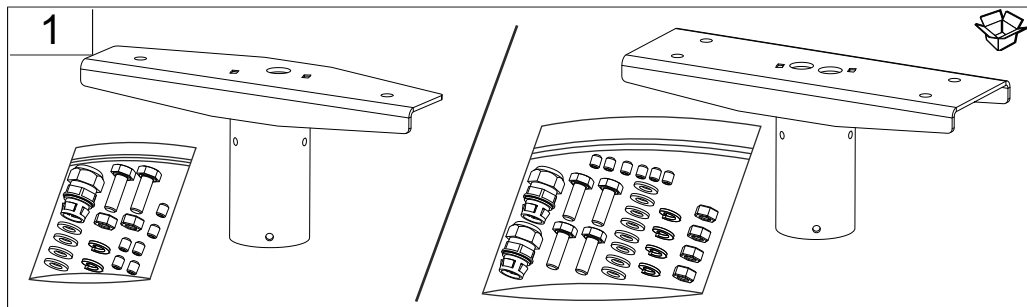






8







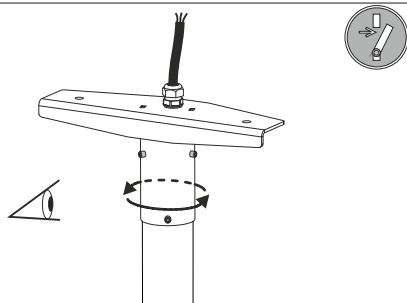


9

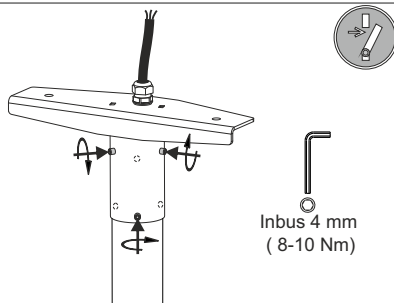

10

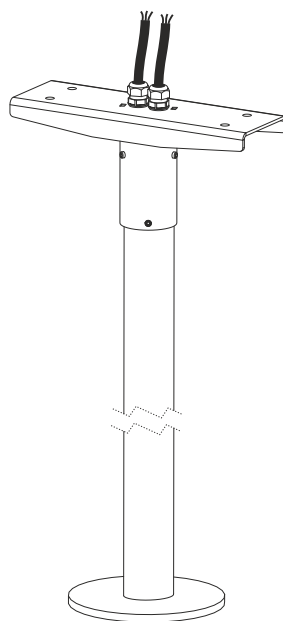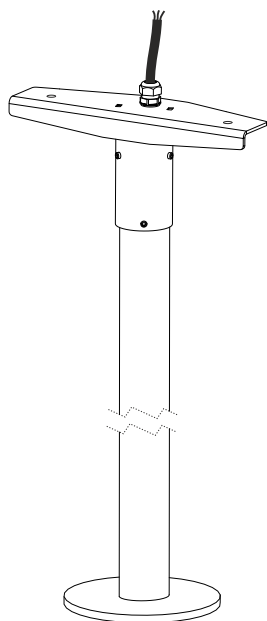

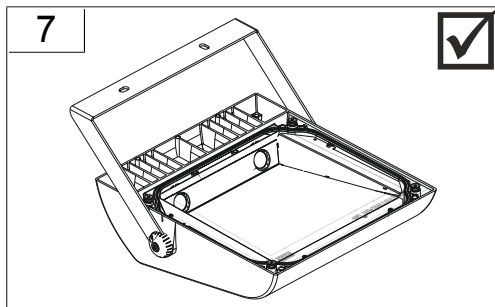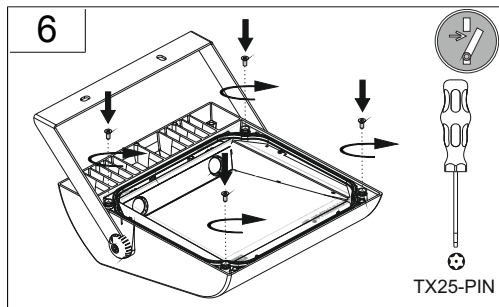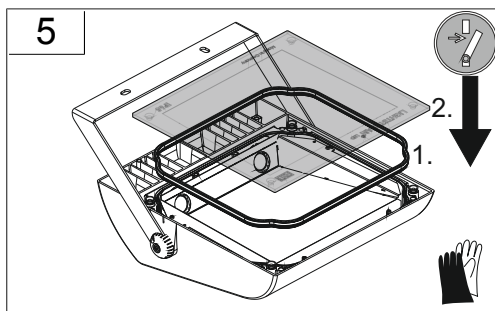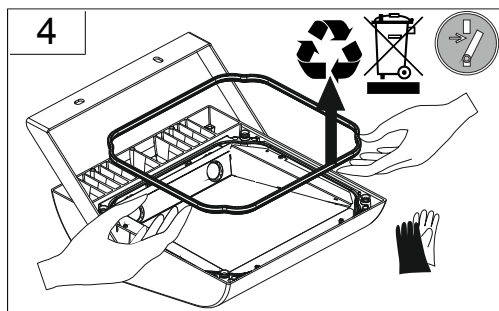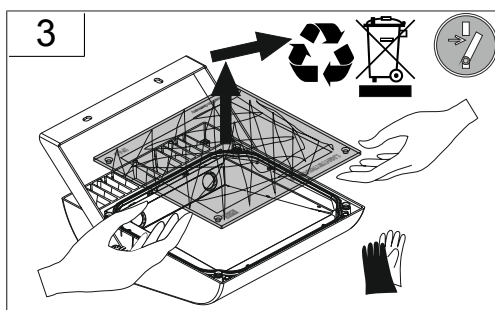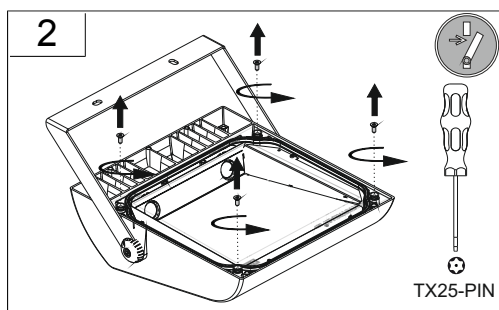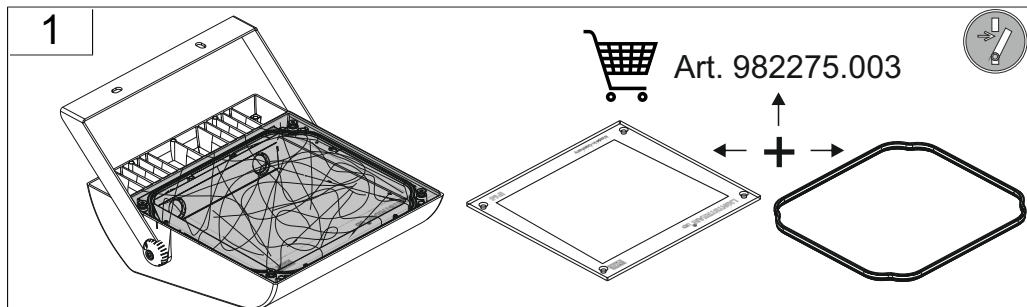

 + 	
	982047.000 L 250, B 95, H 153, d 60 1,9 kg
	982047.0031 L 250, B 95, H 153, d 60 1,9 kg
	982048.000 L 250, B 95, H 153, d 76 2,2 kg
	982048.0031 L 250, B 95, H 153, d 76 2,2 kg
	982049.000 L 250, B 114, H 153, d 60 2,2 kg
	982049.0031 L 250, B 114, H 153, d 60 2,2 kg
	982050.000 L 250, B 114, H 153, d 76 2,5 kg
	982050.0031 L 250, B 114, H 153, d 76 2,5 kg

  	
	982275.003 Ersatzscheibe L 272 x B 294 0,8 kg

Instruction:



46-2016

