


LED power supply 24 V DC, 4 channel, DALI-2 / DALI-DT8 dimmable
Article no. 17290000

Light.
For Generations.

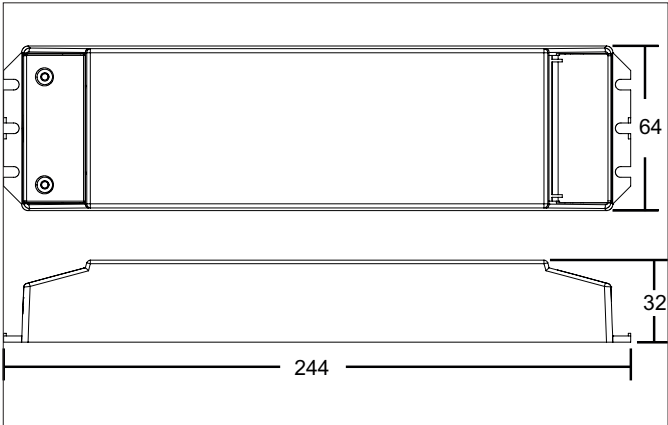

Tender	
LED power supply 24 V DC, 4 channel, DALI-2 / DALI-DT8 dimmable, , Rectangular. Material: Plastic, Degree of protection: according to DIN EN 60529 IP20, Protection class: (EN 61140) II, Voltage: 230V AC 50Hz, Power: 100 W, Dimmable: Yes, Control: DALI-2 .	

- Product Benefits**
- LED power supply 24 V DC incl. DALI dimmer.
 - 4 channel LED dimmer.
 - Control via DALI DT8, TunableWhite and RGBW
 - sec. Power max. 100 Watt

Article data	
Article no.	17290000
GTIN	4251433988816
Short description	LED power supply 24 V DC, 4 channel, DALI-2 / DALI-DT8 dimmable
Material	Plastic
Colour	White
Shape	Rectangular
Length	244 mm
Width	64 mm
Hight	32 mm
Weight	0.470 kg
Conformance	CE

LED power supply 24 V DC, 4 channel, DALI-2 / DALI-DT8 dimmable

Article no. 17290000

Light.
For Generations.

Operating technology of driver	
AC nominal voltage min	100 V
AC nominal voltage max	240 V
Frequency min	50 Hz
Frequency max	60 Hz
Protection class	II
Degree of protection	IP20
Power min	1 W
Power	100 W
Starting current	50 A
Suitable for emergency lighting	No
measure point (tc)	75 °C
Power factor	0.9
Output voltage max	24.00 V
Output voltage min	24.00 V
Control	DALI-2 , DALI-DT8
Connection type-primary	Screw-in connection
Connection type-secondary	Screwed terminal
Number of poles	5

Packing data	
Gross weight	0.5 kg
Length of packaging	255 mm
Packaging width	72 mm
Packaging height	42 mm
Disposal at end of life	This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately. By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.