

INSTRUCTION


41-2017


RZB
LIGHTING

Alu-Star

721811.004.1.76


 IP 65 IK07
    220 - 240 V / 50/60 Hz
  5 x 2,5 mm²
 2,50 mm²

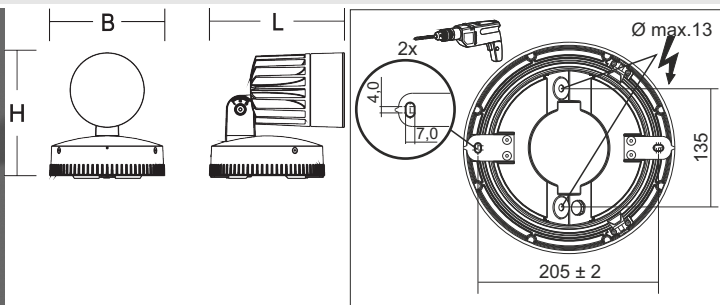

						
721811.004.1.76	L 305, B 240, H 310	LED	88 W	7,2 kg		
Φ 	EEK _{LED}	EEK 	CRI	CCT	T _a min	T _a max
9800 lm	A++	A++	80	4000K	-25 °C	40 °C
 B10	 B16	 C10	 C16			
3	5	5	9	93,5 A		




Die Leuchte darf nur mit ihren vollständigen Schutzabdeckungen betrieben werden.
The luminaire must be used with its complete protective covers only.

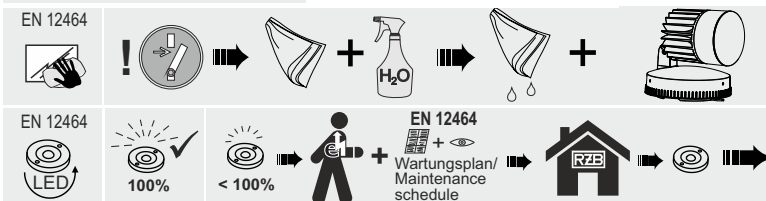


RZB
Rudolf Zimmermann,
Bamberg GmbH
Rheinstraße 16
D-96052 Bamberg
Deutschland
Telefon +49 951/79 09-0
Telefax +49 951/79 09-198
www.rzb.de
info@rzb-leuchten.de




1



2




3




Inbus
3 mm


4




5

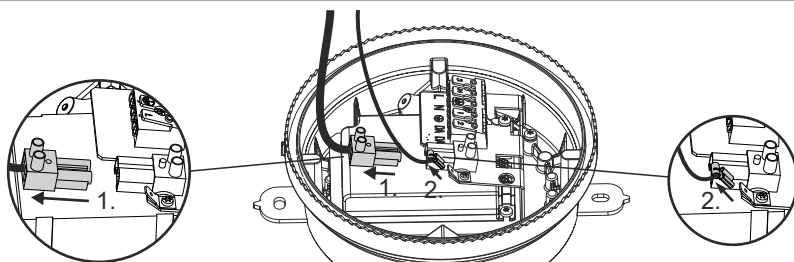


6

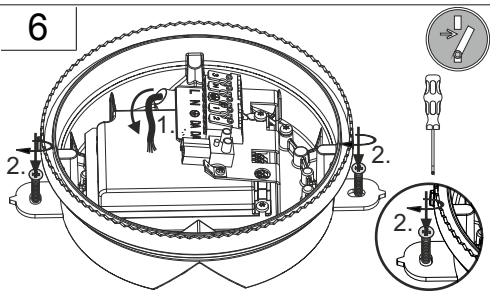


7

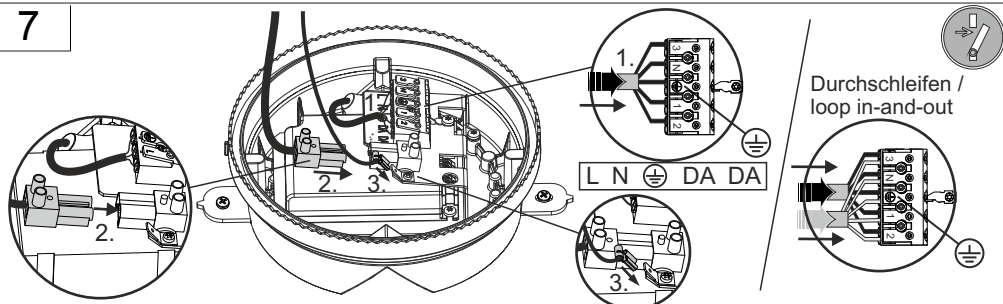


8

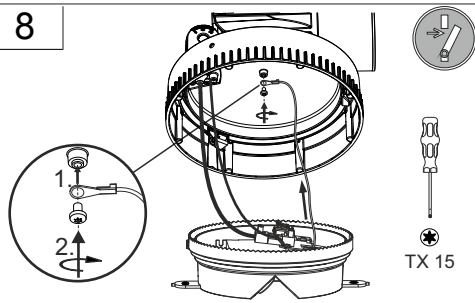


9

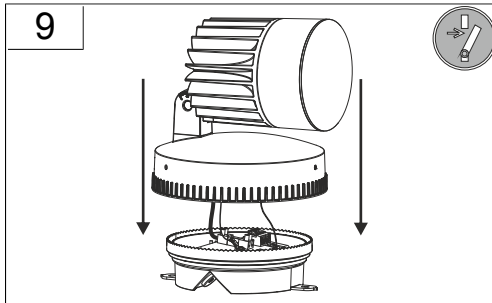


10

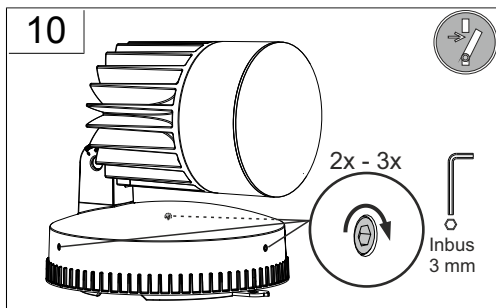


11

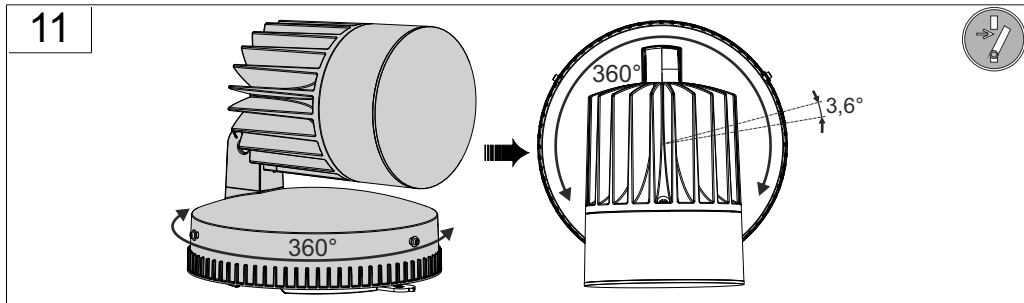


12

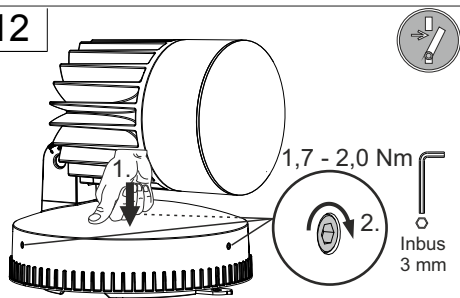


13

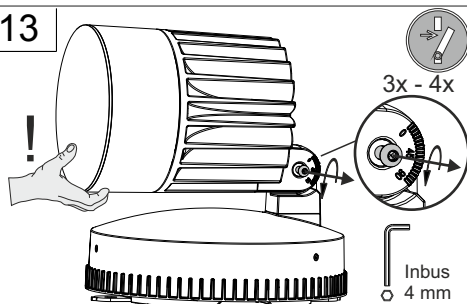


14

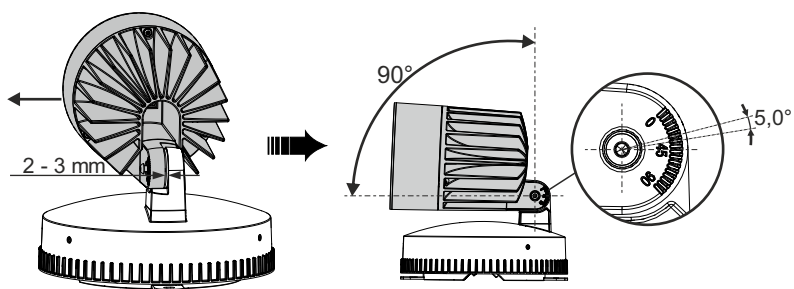


15








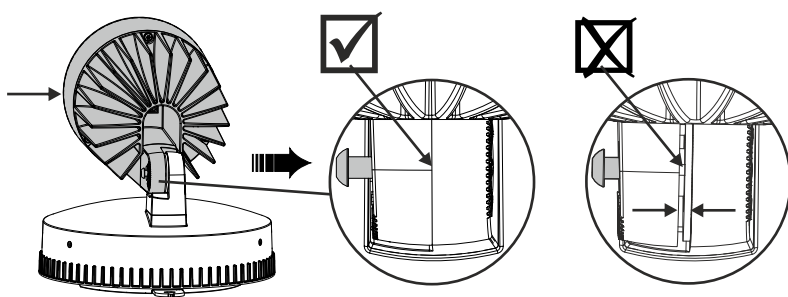










16

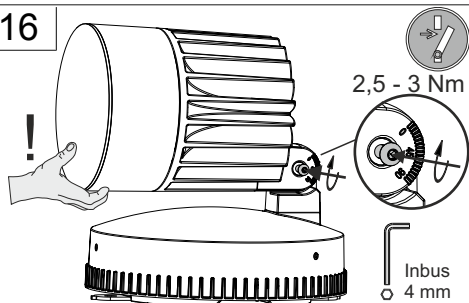

17



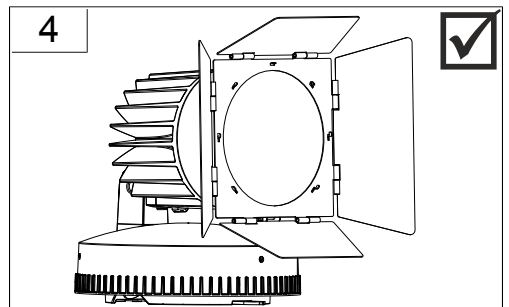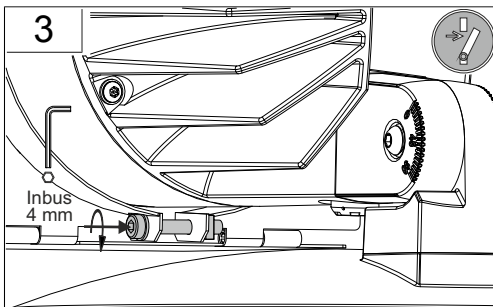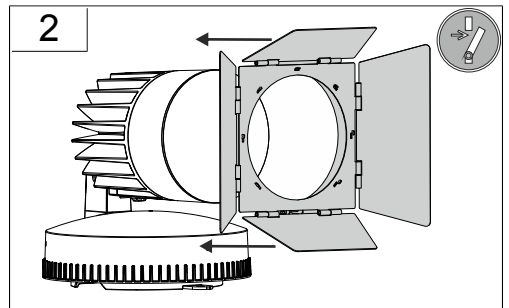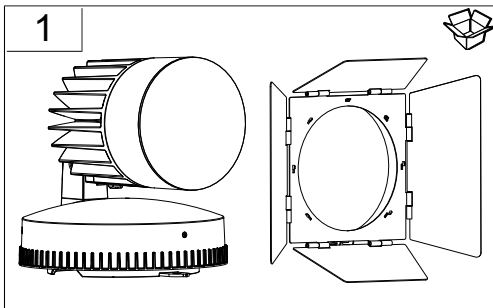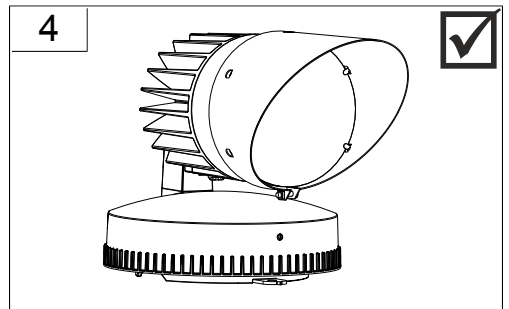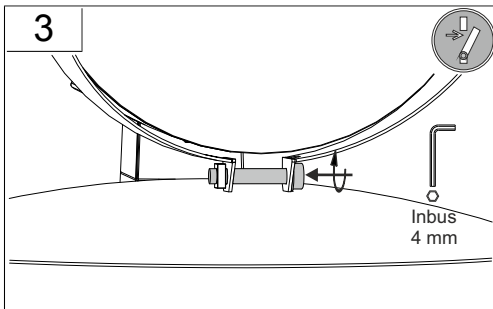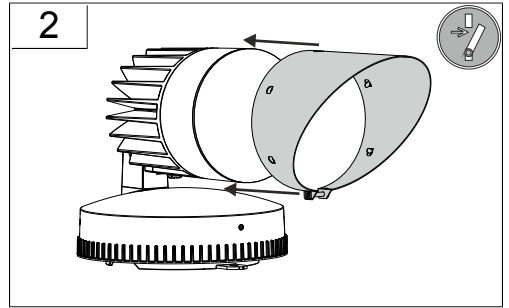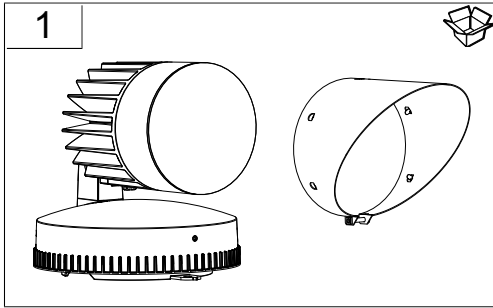

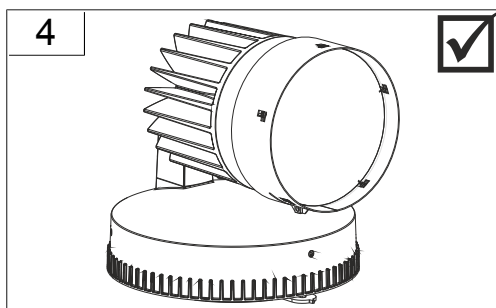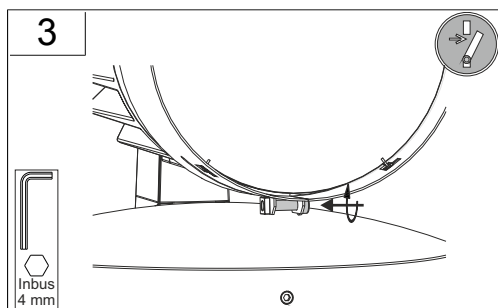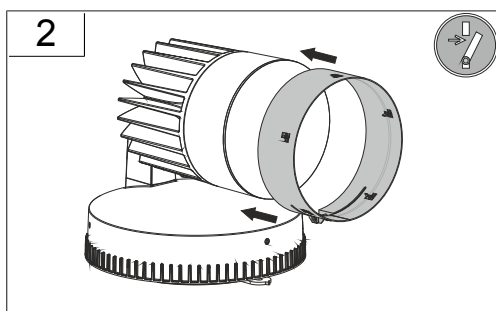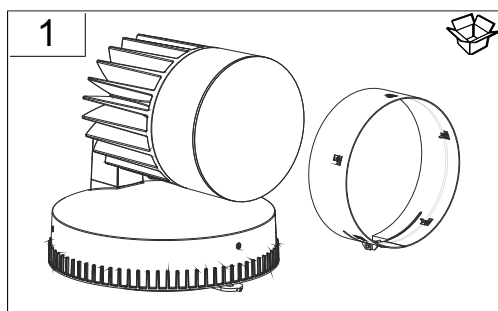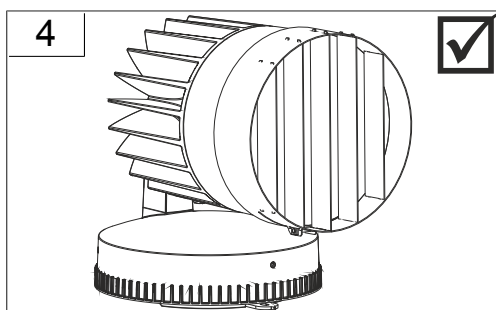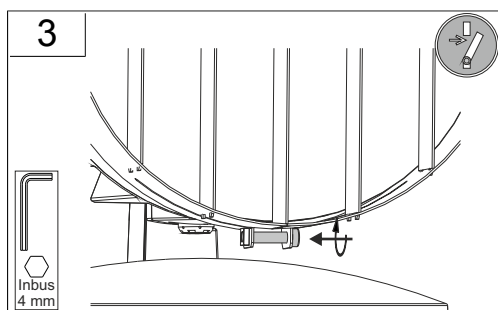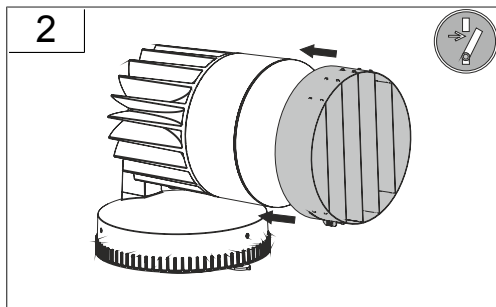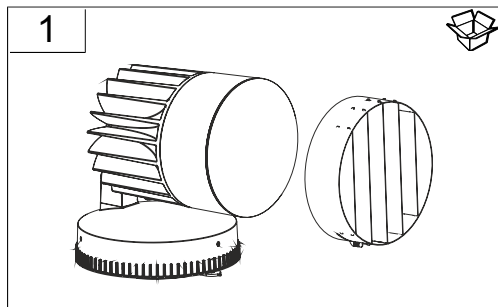



DIN 4844




Vor Wartung oder Reparatur freischalten/
power off before maintenance or repair



Temperatur / temperature
=> -25 °C - +40 °C

Indoor & Outdoor

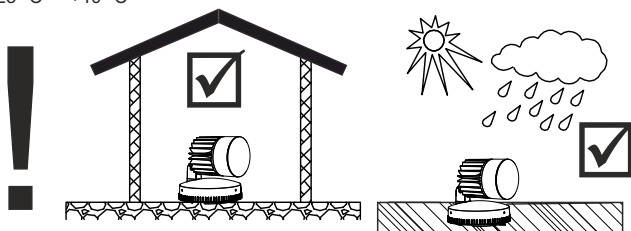

! 0.5 m

Der Abstand zu beleuchteten Gegenständen
muss mindestens 0.5 m betragen!
The distance to the direct illuminated objects
must be at least 0.5 m!



	982164.003	L 220D 211, H 100	1,25 kg
	982167.003	L 241, B 212D 215, H 221	250 g
	982170.003	L 438, B 438, H 31	510 g
	982161.006	D 211, H 58	560 g
	982161.007	D 211, H 58	560 g
	982161.0077	D 211, H 58	560 g
	982161.008	D 211, H 58	560 g
	982242.0031	D 240, H 40, HE 400	2,5 kg