

INSTRUCTION

06-2019

RZB
LIGHTING


Less is more 50

312313.002

IP 20 IK02

 ~ 220 - 240 V 50/60 Hz


 3 x 1,5 mm²
 1,50

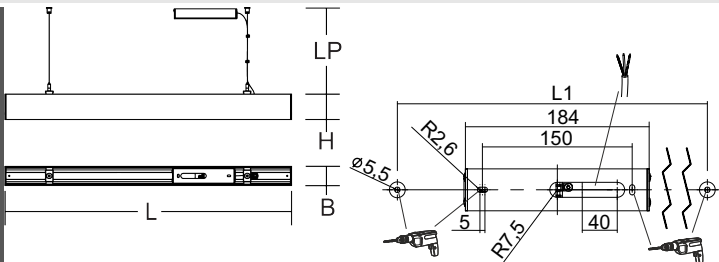

		 [mm]		 [mm]			T _a min
312313.002		L 1402, B 57, H 75		LP 2000		3,45 kg	-20 °C
	P _{LED}	P _{LED}	Φ	CCT	CRI	T _a max	
LED	5 x 5,8 W	34 W	3850 lm	3000 K	80	30 °C	
EEK _{LED}	EEK _{LED}			 B10	 B16		
A++	A++	20 A / 30 μs		15	25		




Die Leuchte darf nur mit ihren vollständigen Schutzabdeckungen betrieben werden.
The luminaire must be used with its complete protective covers only.

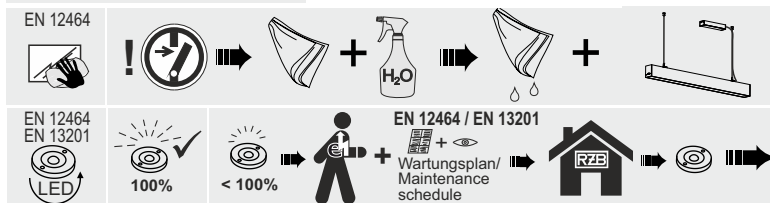


RZB
 Rudolf Zimmermann,
 Bamberg GmbH
 Rheinstraße 16
 D-96052 Bamberg
 Deutschland
 Telefon +49 951/79 09-0
 Telefax +49 951/79 09-198
 www.rzb.de
 info@rzb-leuchten.de




1

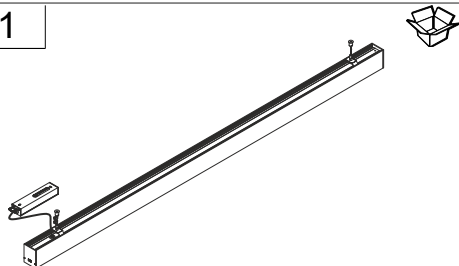


2

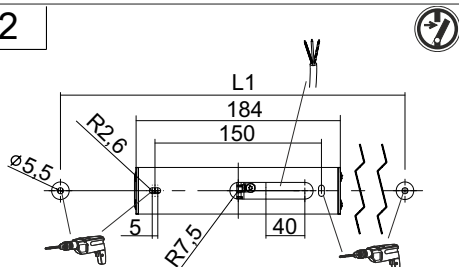


3

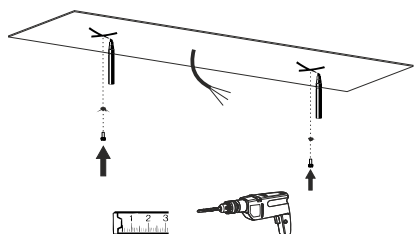


4

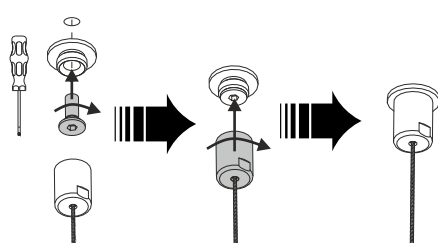


5

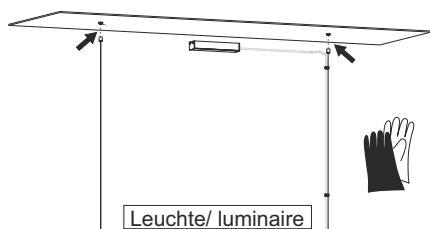


6

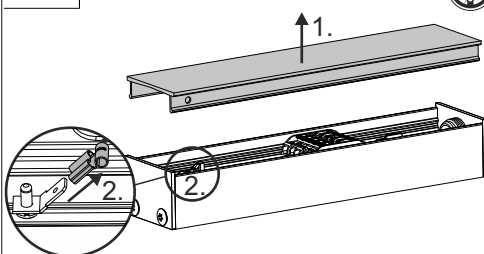

7



8

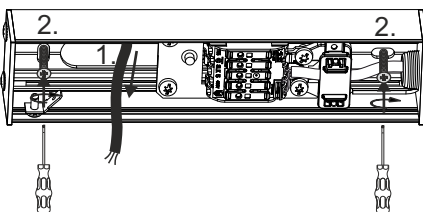





+




9

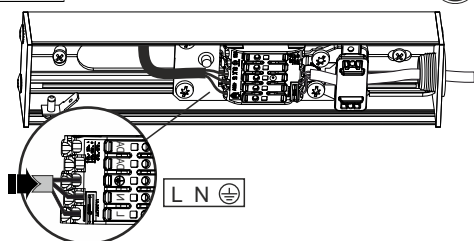


10

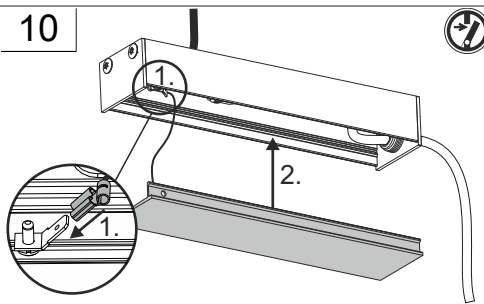


11

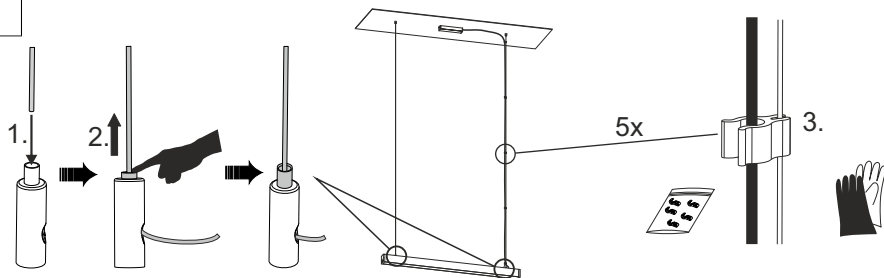

12

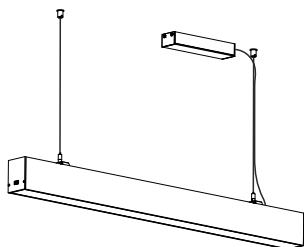

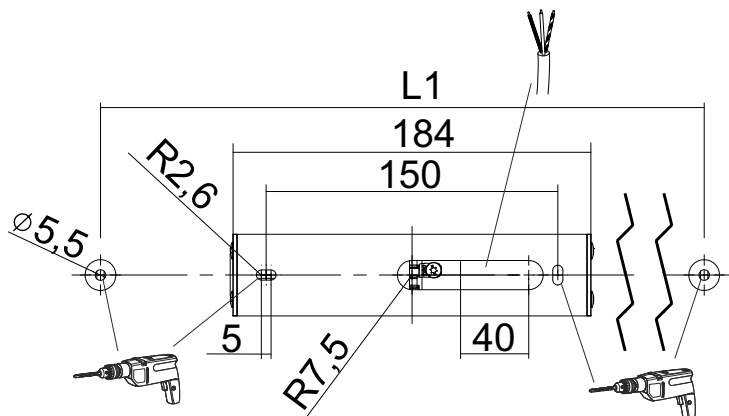

Less is more 50 Pendel

L	B	H	L1
848	57	75	580
1128	57	75	870
1408	57	75	1150
1689	57	75	1430
1969	57	75	1710

DIN 4844



Vor Installation, Wartung oder Reparatur freischalten/
power off before installation, maintenance or repair