

BRUMBERG

LED surface-mounted profile BIRO40

Artikel-Nr. 77143083

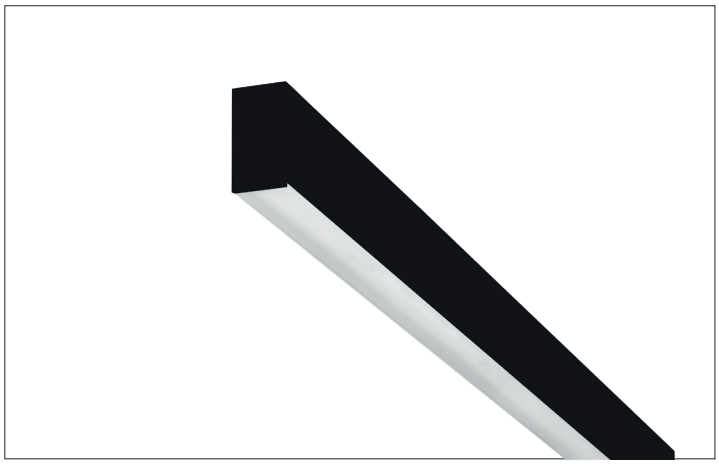



LED surface-mounted profile BIRO40, black, rectangularLamp holder: LED, Mounting method: Surface mounting, Place of installation: Ceiling-mounted, Material: Aluminium / Acrylic, Degree of protection: according to DIN EN 60529 IP20, Protection class: (EN 61140) I, Voltage: 230V AC 50Hz, Power: 31.4W, Luminous flux: 2.430lm, Colour temperature: 3000 K, Light colour : White, Beam angle: 80°, Adjustability: Not adjustable, With control gear: Yes.

Artikel-Nr.	**77143083**
Stand:	22.07.2021 02:04

control	DALI
Colour	Black
Colour of light	3000 K
Glare evaluation	UGR < 25
System efficiency	78 lm/W
Luminous flux	2,430 lm
Material cover	Satinised
Length	1144 mm
Colour rendering	CRI > 90
Beam angle	80 °

Material	Aluminium / Acrylic
Lamp holder	LED
Lamp	LED
Voltage	230V AC 50Hz
Degree of protection	IP20
Protection class	I
Adjustability	Not adjustable
Width	40 mm
Height	75 mm
Circuit type	Parallel conduction

Alle technischen Daten wie Lichttechnische-, Gewichts- und Maßangaben basieren auf Bemessungswerten und sind sorgfältig erstellt. Die mögliche Toleranz der Farbtemperatur beträgt +/- 150K. Die Leistung und Lichtstrom unterliegen initial einer Toleranz von +/- 10%.Die Werte gelten, wenn nicht anders beschrieben, für eine Umgebungstemperatur von 25°C. Technische Änderungen und Irrtümer vorbehalten. Alle Preisangaben verstehen sich als (UVP) in Euro ohne MwSt. Bestellung erfolgt zu unseren Allgemeinen Verkaufsbedingungen unter www.brumberg.com/de/agb/allgemeine-verkaufsbedingungen/.