

INSTRUCTION

06-2017

RZB
LIGHTING

Flat Polymero IP44 PC

221154.002.191



IP 43, IP 44 IK10





220 - 240 V / 50 - 60 Hz



3 x 1,5 mm²

2,50

mm²

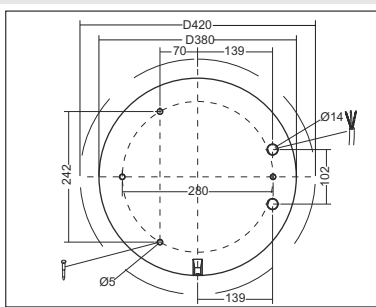

221154.002.191

D 420, H 150

LED

21 W

1,76 kg



EEK_{LED}

EEK

CRI

CCT


2050 lm

A+

A+

83

3000K



77

124

77

124

0,1 A



Die Leuchte darf nur mit ihren vollständigen Schutzabdeckungen betrieben werden.
The luminaire must be used with its complete protective covers only.

EN 12464



EN 12464



EN 12464
Wartungsplan/
Maintenance
schedule




RZB
Rudolf Zimmermann,
Bamberg GmbH
Rheinstraße 16
D-96052 Bamberg
Deutschland
Telefon +49 951/79 09-0
Telefax +49 951/79 09-198
www.rzb.de
info@rzb-leuchten.de


www.rzb.de

1 / 5


1

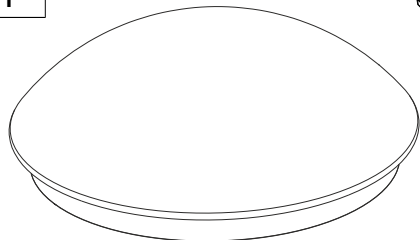


2




3



4

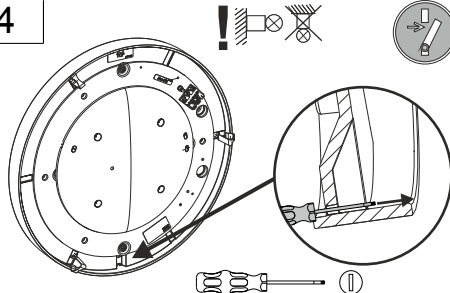

5

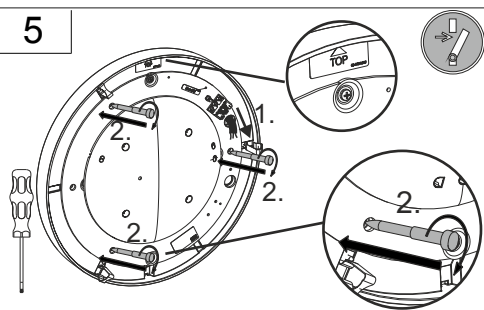

6



Master (out)

Slave







7

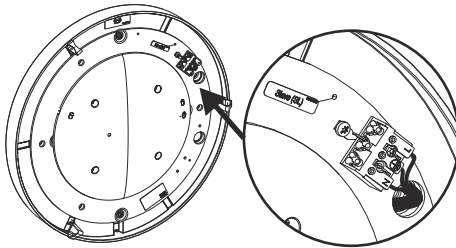


8

Master - Slave - System


radialer Bewegungsmelder/
radial motion sensor

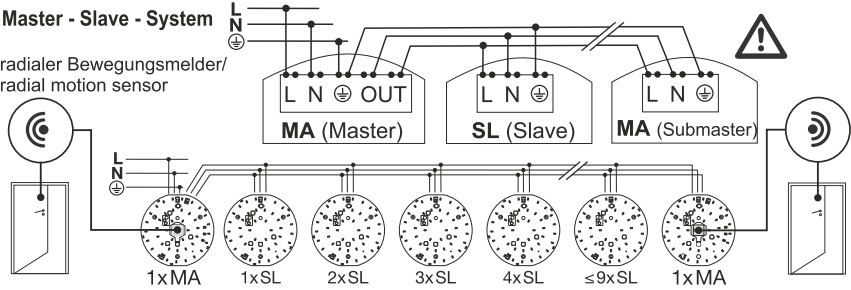


9




09-3003.052



10

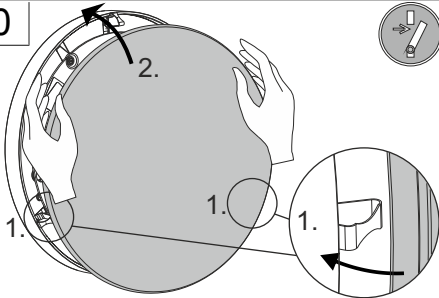

11

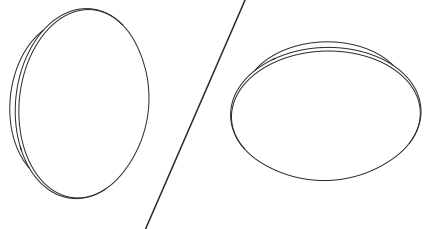


a

DIN 4844



Vor Wartung oder Reparatur freischalten/
power off before maintenance or repair

b

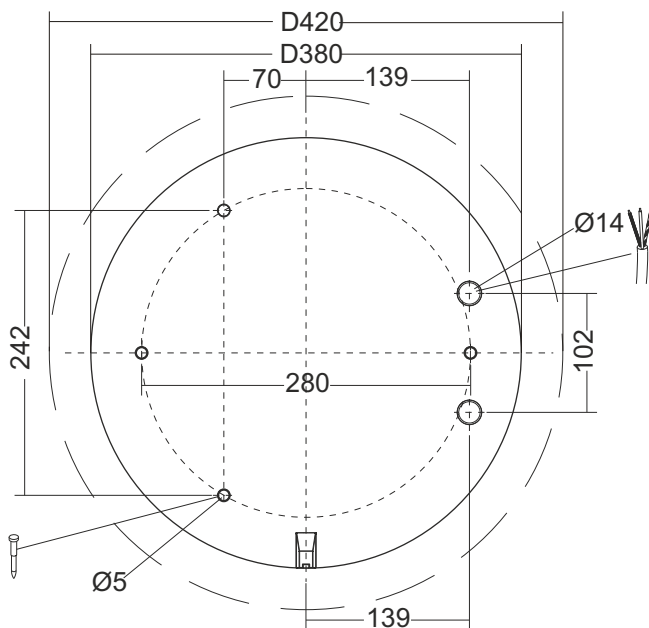



08-5146.002

Ersatzdiffusor PC D 420

828 g



Instruction:



06-2017



Instruction:



06-2017

