

INSTRUCTION

34-2018

RZB
LIGHTING

Lightstream LED



721718.004.1.76




~ 220 - 240 V 50/60 Hz



mm² 2,50 mm²



	 [mm]		T _a min			
721718.004.1.76		L 501, B 374, H 182		12,1 kg	-30 °C	
	P 	P 	Φ 	CCT	CRI	T _a max
LED	4 x 56 W	225 W	24500 lm	4000 K	80	50 °C
EEK 	EEK 	 I _{max} I _{max/2} T ₅₀	 B10	 B16	 C10	 C16
A++	A++	75 A / 570 μs	1	2	1	3




Die Leuchte darf nur mit ihren vollständigen Schutzabdeckungen betrieben werden.
The luminaire must be used with its complete protective covers only.

EN 12464











EN 12464
EN 13201



EN 12464 / EN 13201




RZB
Rudolf Zimmermann,
Bamberg GmbH
Rheinstraße 16
D-96052 Bamberg
Deutschland
Telefon +49 951/79 09-0
Telefax +49 951/79 09-198
www.rzb.de
info@rzb-leuchten.de

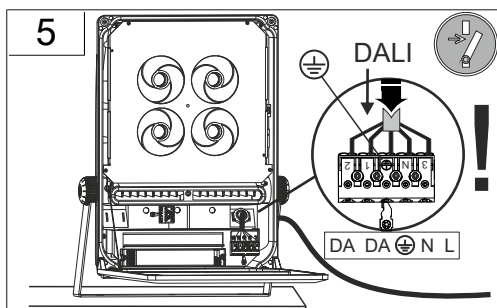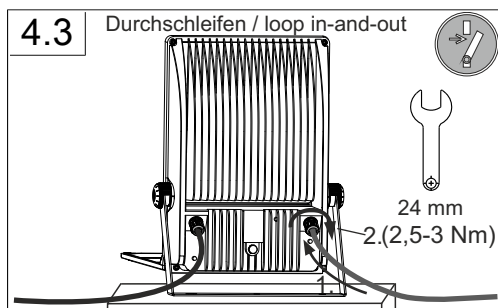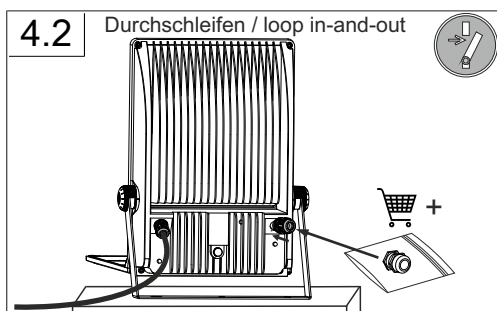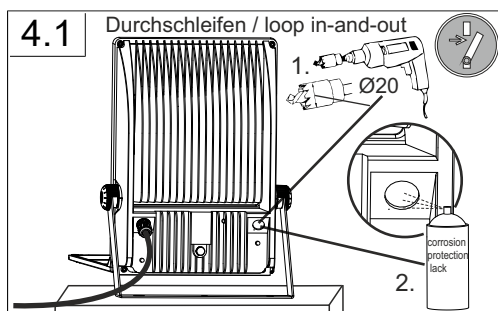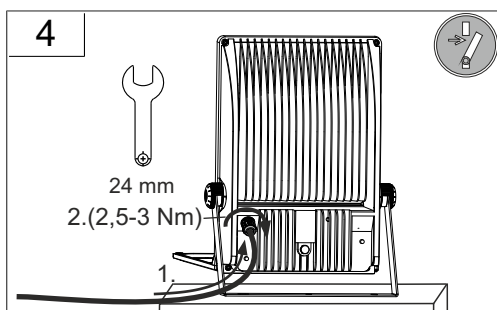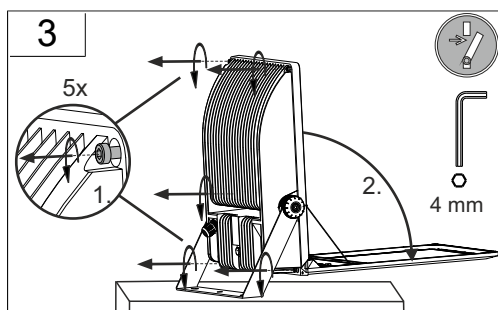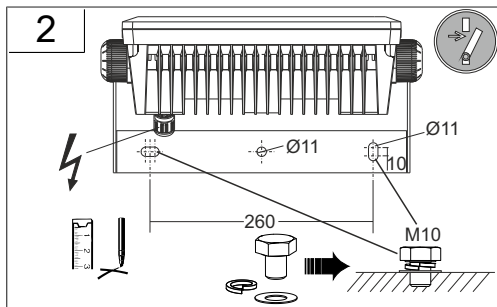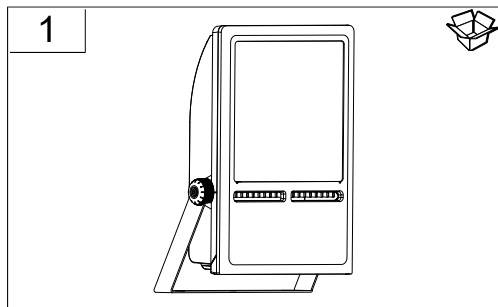





5.1 Durchschleifen / loop in-and-out

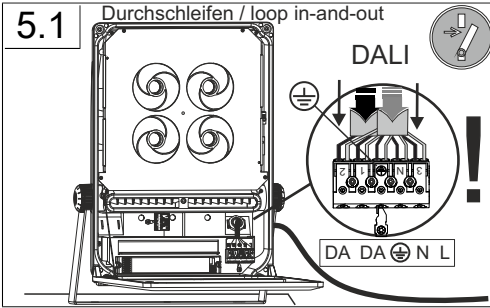


5.2

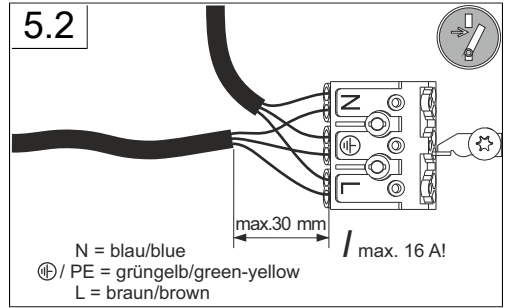


6

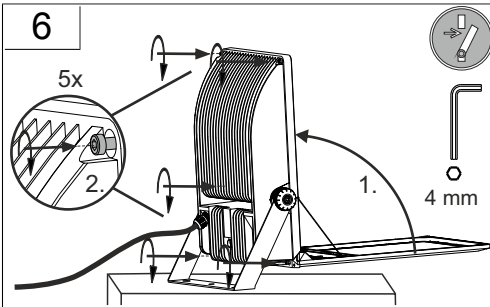

7

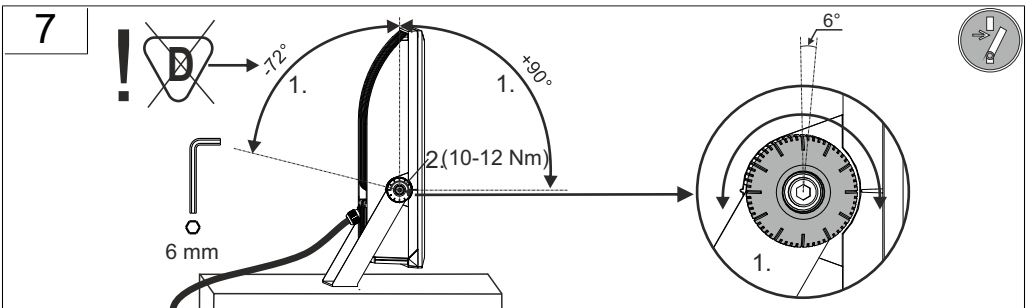

8

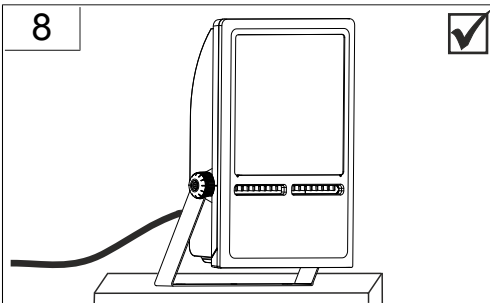



Hinweis zum Einsatz von Leuchten
mit ∇ -Kennzeichnung nach EN 60598-2-24

IP 4x  Umgebung ohne Staubablagerung

IP 5x  Umgebung mit nicht elektrisch leitender Staubablagerung

IP 6x  Umgebung mit elektrisch leitender Staubablagerung
Maximale Umgebungstemperatur
beim Einsatz der Leuchte in solcher
Umgebung beträgt nur 25° C!

Reference for application of lumiaires
with ∇ - marking according to EN 60598-2-24


IP 4x  Environment without dust deposit

IP 5x  Environment with non-electrically
conductive dust deposit

IP 6x  Environment with electrically
conductive dust deposit
Maximum ambient temperature
when using the luminaire in such
an environment is only 25 ° C!

!  0,2 m 







Der Abstand zu beleuchteten Gegenständen muss min. 0,2 m betragen!
The distance to the direct illuminated objects must be at least 0,2 m!





	982052.004	L 346, B 248, H 47,	0,86 kg
	982003.000	L 346, B 112, H 154,	3,6 kg
	982003.004	L 346, B 112, H 154,	3,6 kg
	982004.000	L 346, B 136, H 204,	4,7 kg
	982004.004	L 346, B 136, H 204,	4,7 kg
	982005.000	L 346, B 136, H 204,	5,1 kg
	982005.004	L 346, B 136, H 204,	5,1 kg
	982002.000	L 346, B 97, H 154,	2,9 kg



	982002.004	L 346, B 97, H 154,	2,9 kg
	982045.000	L 346, B 97, H 154,	2,6 kg
	982045.004	L 346, B 97, H 154,	2,6 kg
	982046.000	L 346, B 110, H 204,	3,8 kg
	982046.004	L 346, B 110, H 204,	3,8 kg
	982060.004	, H 45,	18 g
	982401.004	L 525, B 381, H 87,	4,5 kg



	981984.004	L 465, B 325, H 32,	1,79 kg
---	------------	---------------------	---------

Instruction:

34-2018



982083.000.1

L 28, B 28, H 1

2,2 g

