


LED converter 350 mA, trailing-edge phase dimmable

Article no. 17648020

Light.  
For Generations.

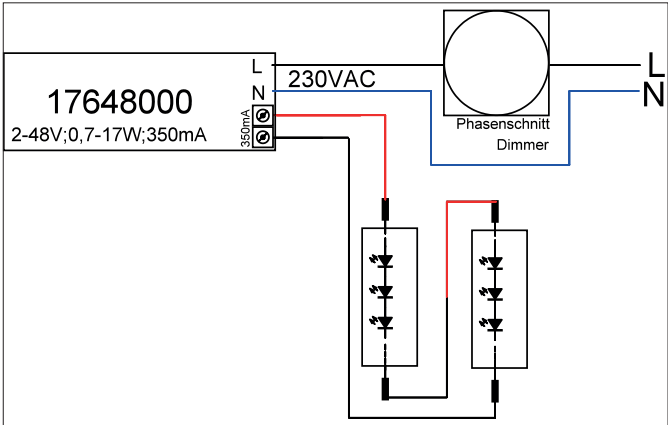

**Tender**

LED converter 350 mA, trailing-edge phase dimmable, , Rectangular.This driver fulfills the requirements for safety lighting systems in accordance with DIN EN 50172 VDE 0108-100:2005-01. This converter is equipped with safety devices which protect it against overvoltage, short-circuit as well as thermal and electric overloads. The input and output terminals are suitable for cables with a cross-section of up to 1.5 mm². Material: Plastic, Degree of protection: according to DIN EN 60529 IP20, Protection class: (EN 61140) II, Current: 350 mA, Voltage: 230V AC 50Hz, Power: 17 W, Dimmable: Yes, Control: Trailing-edge phase.

| Article data      |                                                          |
|-------------------|----------------------------------------------------------|
| Article no.       | 17648020                                                 |
| GTIN              | 4251433924531                                            |
| Short description | LED converter 350 mA, trailing-edge phase dimmable       |
| Material          | Plastic                                                  |
| Shape             | Rectangular                                              |
| Length            | 166 mm                                                   |
| Width             | 46 mm                                                    |
| Hight             | 34 mm                                                    |
| Scope of delivery | Plug&Play-Ausgangsleitung, Länge 110 mm und Anschlussbox |
| Weight            | 0.211 kg                                                 |
| stamp             | ENEC 05, MM                                              |
| Conformance       | CE                                                       |

LED converter 350 mA, trailing-edge phase dimmable  
Article no. 17648020

Light.  
For Generations.

| Operating technology of driver  |                            |
|---------------------------------|----------------------------|
| AC nominal voltage min          | 198 V                      |
| AC nominal voltage max          | 264 V                      |
| Frequency min                   | 50 Hz                      |
| Frequency max                   | 60 Hz                      |
| Protection class                | II                         |
| Degree of protection            | IP20                       |
| Power min                       | 0.7 W                      |
| Power                           | 17 W                       |
| Output_ripple_current           | 3                          |
| Starting current                | 5A 50µs                    |
| Suitable for emergency lighting | No                         |
| measure point (tc)              | 75 °C                      |
| Version                         | Plug&Play + connection box |
| Power factor                    | 0.97                       |
| max. no. lights on B16 A        | 50                         |
| Output voltage max              | 47.00 V                    |
| Output voltage min              | 2.00 V                     |
| Control                         | Trailing-edge phase        |
| Number of poles                 | 2                          |
| Enviroment temprature (ta)      | -25 °C up to +50 °C        |
| Measure point (tc)              | max. +75 °C                |
| Output current                  | 350 mA                     |

| Packing data            |                                                                                                                                                                                                                                                                                                                                                                                |
|-------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Gross weight            | 0.277 kg                                                                                                                                                                                                                                                                                                                                                                       |
| Length of packaging     | 140 mm                                                                                                                                                                                                                                                                                                                                                                         |
| Packaging width         | 110 mm                                                                                                                                                                                                                                                                                                                                                                         |
| Packaging hight         | 120 mm                                                                                                                                                                                                                                                                                                                                                                         |
| Disposal at end of life | <p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p> |