BRUMBERG

QualityFlex Performance flex lighting 30 m, CRI > 95, 1,5 W / m, IP00

Artikel-Nr. 19300306

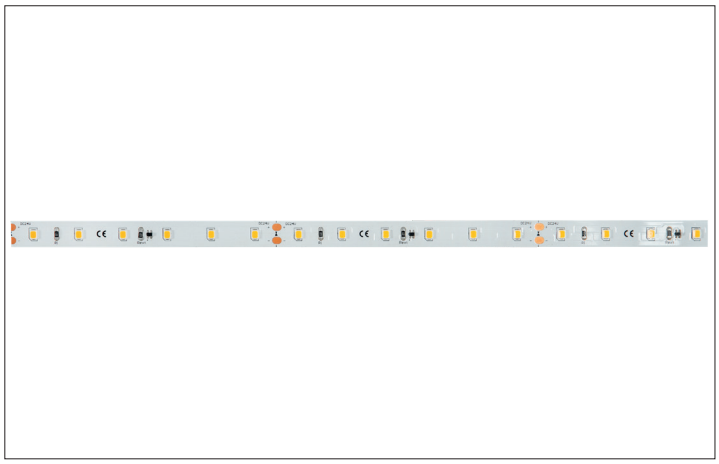



QualityFlex Performance flex lighting 30 m, CRI > 95, 1,5 W / m, IP00, white, 6000K, CRI > 95. LED flex lighting zur Decorative, technical as well as efficient lighting of light coves, linear applications and backlighting, basic or general lighting of rooms, architectural applications and for areas where high illumination is required, such as indirect or direct lighting, luminous ceilings, gastronomy lighting and much more. This luminaire contains incorporated and non-exchangeable LED light sources

Artikel-Nr.	**19300306**
Stand:	23.06.2021 08:58

Energy efficiency class	A++
Colour of light	6000 K
Light colour	White
Power	45 W
Lamp power per meter	1.5 W/m
Beam angle	120 °
Length	30000 mm
Width	10 mm
Height	1.4 mm
Length of individual sections	100 mm
Degree of protection	IP00

Protection class	III
McAdam-Step	McAdam-Step 5
Short Pitch	16.7 mm
Number of lamps per meter	60 Qty
Voltage	24V
Voltage type	DC
Ambient temperature	-10 °C bis +40 °C
Circuit type	Parallel conduction
Length of the connection line	350 mm
Colour rendering	CRI > 95
Maximum module length	30,000 mm

Alle technischen Daten wie Lichttechnische-, Gewichts- und Maßangaben basieren auf Bemessungswerten und sind sorgfältig erstellt. Die mögliche Toleranz der Farbtemperatur beträgt +/- 150K. Die Leistung und Lichtstrom unterliegen initial einer Toleranz von +/- 10%.Die Werte gelten, wenn nicht anders beschrieben, für eine Umgebungstemperatur von 25°C. Technische Änderungen und Irrtümer vorbehalten. Alle Preisangaben verstehen sich als (UVP) in Euro ohne MwSt. Bestellung erfolgt zu unseren Allgemeinen Verkaufsbedingungen unter www.brumberg.com/de/agb/allgemeine-verkaufsbedingungen/.