


BRUMBERG


LED recessed downlight set, V4A, IP65, on/off

Artikel-Nr. 38306423

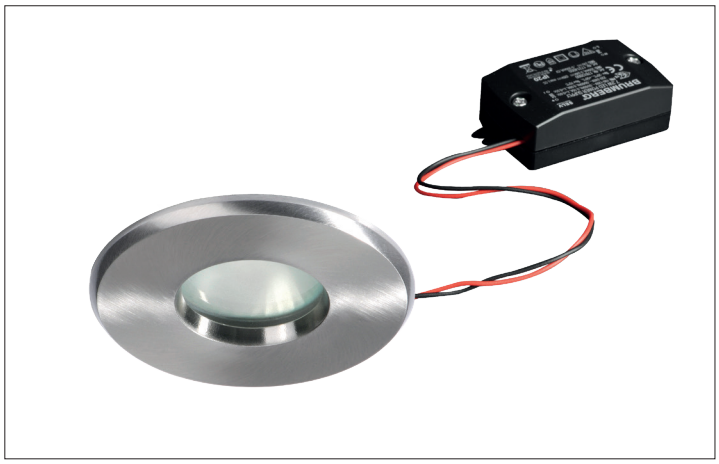







LED recessed downlight set, V4A, IP65, on/off , stainless steel, round. In a compact design, for installation in tool-less rapid assembly systems. Set including a converter for 230-V mains voltage, on/off switchable, dimensions of converter: L 68 x W 35 x H 21 mm . Mounting method: Recessed mounting, Place of installation: Ceiling-mounted, Material:, Degree of protection: according to DIN EN 60529 IP65*, Protection class: (EN 61140) II, Voltage: 230V AC 50Hz, Power: 6W, Amount of light sources / fittings: 1.0 Qty, Luminous flux: 540lm, Colour temperature: 3.000 K, Light colour : White, Beam angle: 38°, Adjustability: Not adjustable, With control gear: Yes, Control: on/off.

Artikel-Nr.	**38306423**
Stand:	26.10.2021 02:29

Colour temperature	3000 K
Colour	Stainless steel
Beam angle	38 °
Amount of light sources / fittings	1 Qty
Material	Edelstahl V4A / Aluminium / Glas / Kunststoff
Power	6 W
Lamp	LED
Colour rendering	CRI > 80
Control	on/off

Outer diameter	84 mm
Built-in diameter	68 mm
Installation depth	75 mm
Voltage	230V AC 50Hz
Degree of protection	IP65*
Protection class	II
Circlip	Without circlip
Adjustability	Not adjustable
Circuit type	Parallel conduction

Alle technischen Daten wie Lichttechnische-, Gewichts- und Maßangaben basieren auf Bemessungswerten und sind sorgfältig erstellt. Die mögliche Toleranz der Farbtemperatur beträgt +/- 150K. Die Leistung und Lichtstrom unterliegen initial einer Toleranz von +/- 10%.Die Werte gelten, wenn nicht anders beschrieben, für eine Umgebungstemperatur von 25°C. Technische Änderungen und Irrtümer vorbehalten. Alle Preisangaben verstehen sich als (UVP) in Euro ohne MwSt. Bestellung erfolgt zu unseren Allgemeinen Verkaufsbedingungen unter www.brumberg.com/de/agb/allgemeine-verkaufsbedingungen/.