


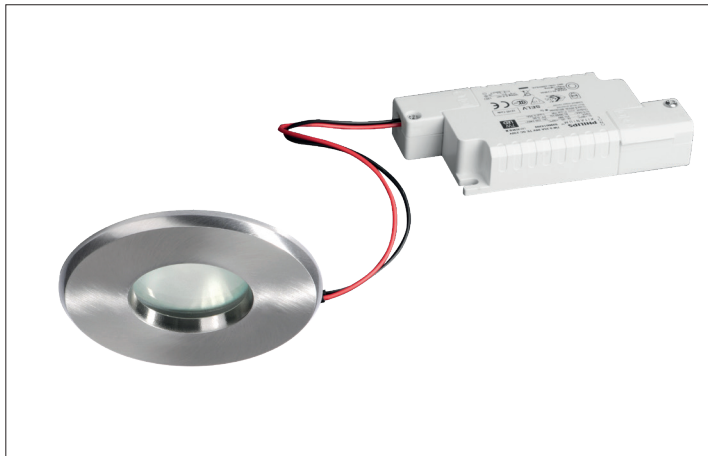


LED recessed downlight set, V4A, IP65, phase dimmable

Artikel-Nr. 39306423

LED recessed downlight set, V4A, IP65, phase dimmable , stainless steel, round. In a compact design, for installation in tool-less rapid assembly systems. Set including a converter for 230-V mains voltage, trailing-edge phase dimmable, dimensions of converter: L 110 x W 50 x H 19 mm. Mounting method: Recessed mounting, Place of installation: Ceiling-mounted, Material:, Degree of protection: according to DIN EN 60529 IP65*, Protection class: (EN 61140) II, Voltage: 230V AC 50Hz, Power: 6W, Amount of light sources / fittings: 1.0 Qty, Luminous flux: 540lm, Colour temperature: 3.000 K, Light colour : White, Beam angle: 38°, Adjustability: Not adjustable, With control gear: Yes, Control: Trailing-edge phase.

Artikel-Nr.		39306423	
Stand:		26.10.2021 00:08	
Colour temperature	3000 K	Outer diameter	84 mm
Colour	Stainless steel	Built-in diameter	68 mm
Beam angle	38 °	Installation depth	75 mm
Amount of light sources / fittings	1 Qty	Voltage	230V AC 50Hz
Material	Edelstahl V4A / Aluminium / Glas / Kunststoff	Degree of protection	IP65*
Power	6 W	Protection class	II
Lamp	LED	Circlip	Without circlip
Colour rendering	CRI > 80	Adjustability	Not adjustable
Control	Trailing-edge phase	Circuit type	Parallel conduction