


INSTRUCTION

Flat Basic
211006.002



RZB
LIGHTING



≈ 0 - 250 V 0 - 60 Hz IP 43, IP 44 IK02



2 x 1,5 mm²



2,50 mm²



D 300, H 106



A60



1,79 kg




1 x 75 W











A, C, E

A, A+, A++




DIN EN IEC 61340-5-1



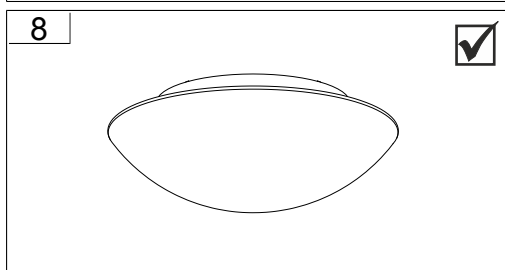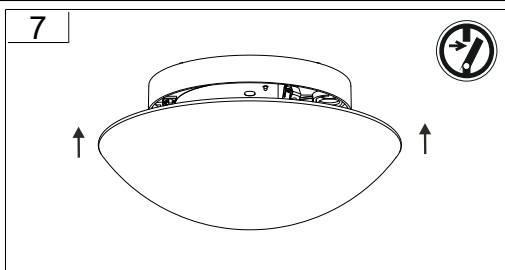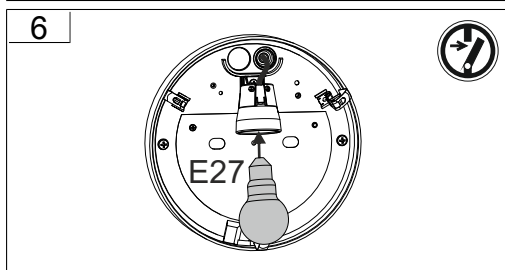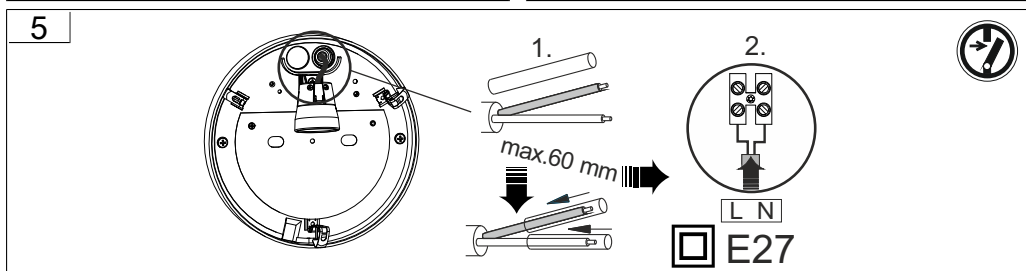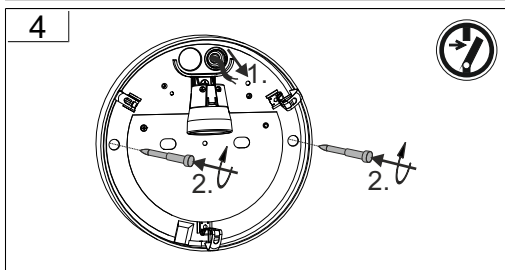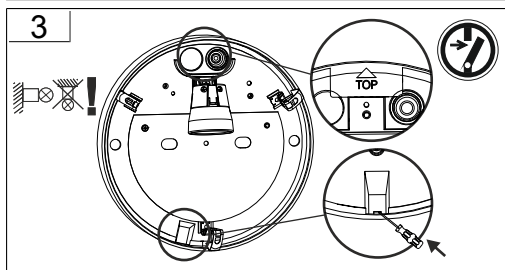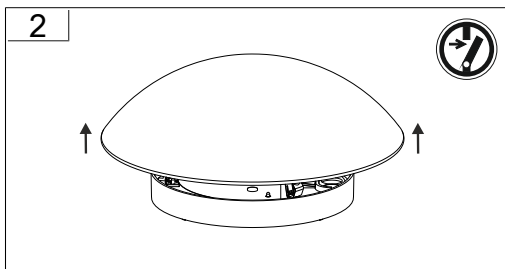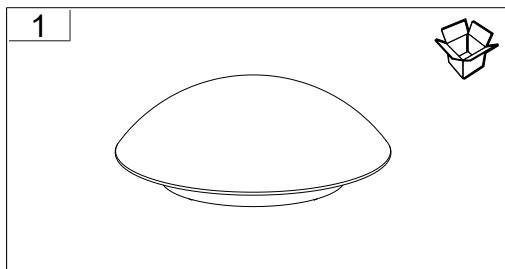





1

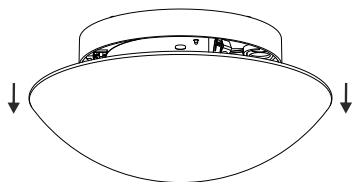


2

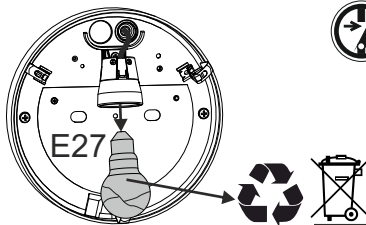


3








4

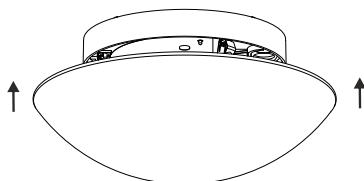

5



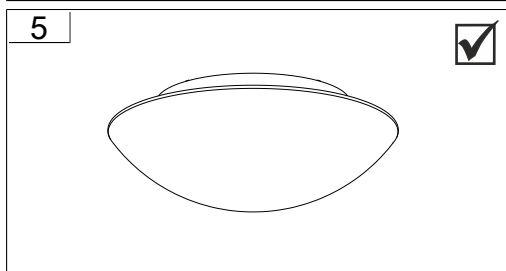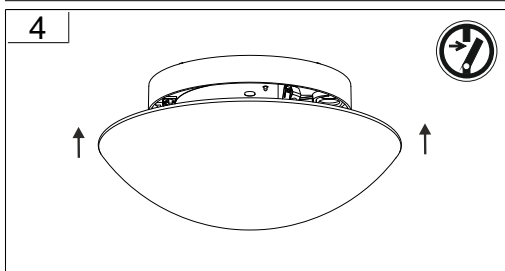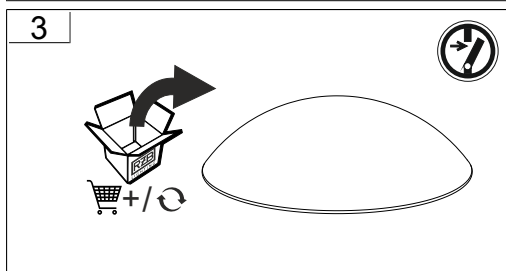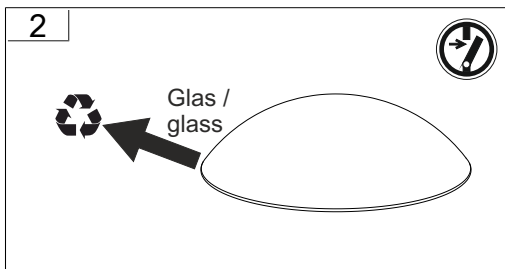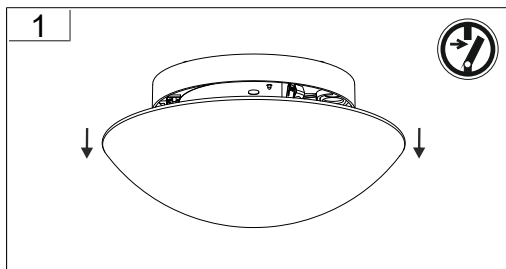



Bei Fragen zu unseren Symbolen,
besuchen Sie folgende Webseite:



If you have any questions about our
signs, visit the following website:

www.rzb.de/fileadmin/assets/downloads/PDF/RZB_Symbolklaerung.pdf



IP 43



IP 44




	981098.002	D 320, H 10	266 g
	981098.004	D 320, H 10	250 g
	981098.0042	D 320, H 10	271 g
	981098.005	D 320, H 10	250 g
	981098.0061	D 320, H 10	266 g
	981098.0076	D 320, H 10	266 g
	981098.0082	D 320, H 10	266 g
	981098.009	D 320, H 10	266 g



	05-211006.022	D 300, H 96	1,14 kg
--	---------------	-------------	---------



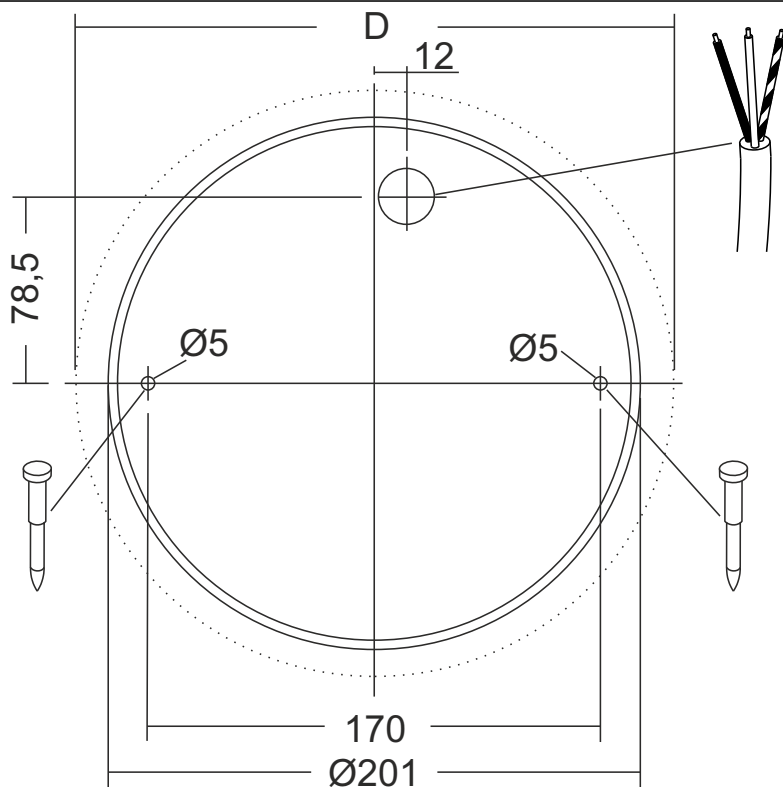

RZB - Rudolf Zimmermann, Bamberg GmbH
Rheinstraße 16
96052 Bamberg

☎ 0951/7909-0
Fax: 0951/7909-198

E-mail: info@rzb-leuchten.de