


GLOB 400.2540.1/DALI

Globia (1xLED 24W 840/4000K 3100lm)

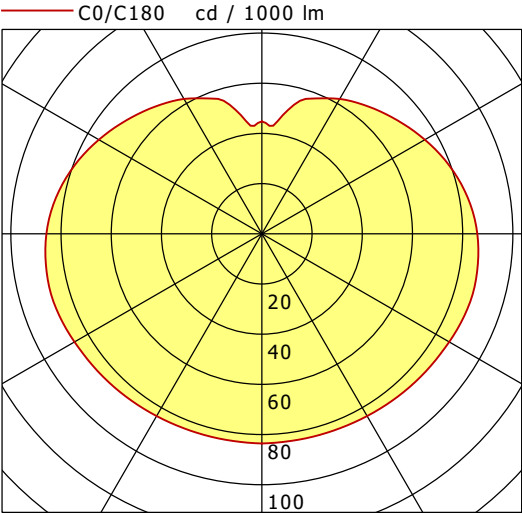

	C0	C90	C180	C270
0°	84	84	84	84
30°	84	84	84	84
60°	86	86	86	86
90°	86	86	86	86
120°	75	75	75	75
150°	62	62	62	62
180°	45	45	45	45
cd / 1000 lm				

LDC unsuitable for cone representation.
The C0 angle is oversized.

η	LED
Efficiency	129 lm/W
Direct/Indirect	↓ 54% / ↑ 46%
System Power	24 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	17.1
UGR C90/C270	17.1
CIE Flux Codes	24 49 75 54 100
Ra/CRI	> 80