

INSTRUCTION

36-2016

RZB
LIGHTING

Toledo Flat

901585.002.1.76



IP 40 IK06






220 - 240 V / 50 - 60 Hz



4 x 1,5 mm²



1,50 mm²

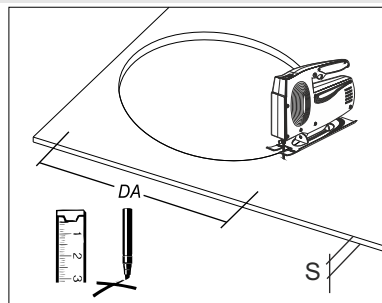

901585.002.1.76

D 495, H 6

DA 470, HE
60, S 1-18 mm

LED

35,0 W

2,59 kg

Φ

EEK_{LED}

EEK

CRI

CCT

3600 lm

A+

A+

80

4000K



B10




B16



C10



C16



18

30

30

51

5,3 A



Die Leuchte darf nur mit ihren vollständigen Schutzabdeckungen betrieben werden.
The luminaire must be used with its complete protective covers only.

EN 12464



EN 12464










EN 12464

Wartungsplan/
Maintenance
schedule




RZB
Rudolf Zimmermann,
Bamberg GmbH
Rheinstraße 16
D-96052 Bamberg
Deutschland
Telefon +49 951/79 09-0
Telefax +49 951/79 09-198
www.rzb.de
info@rzb-leuchten.de

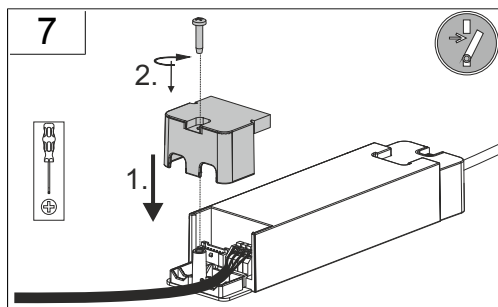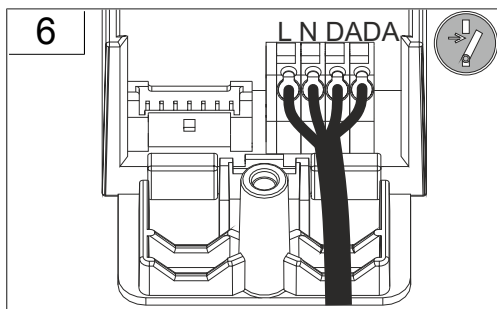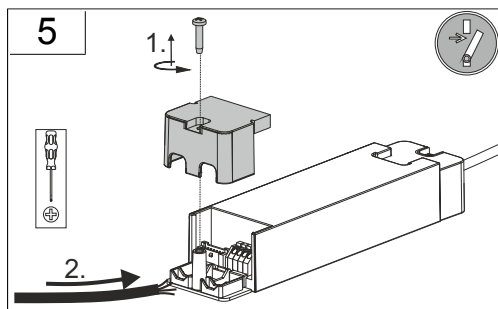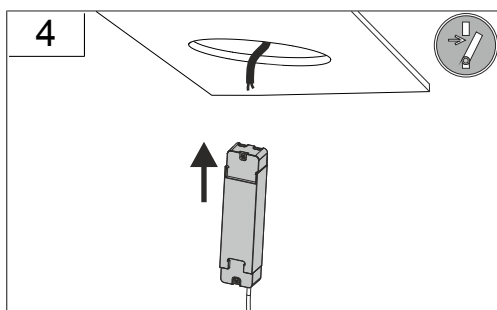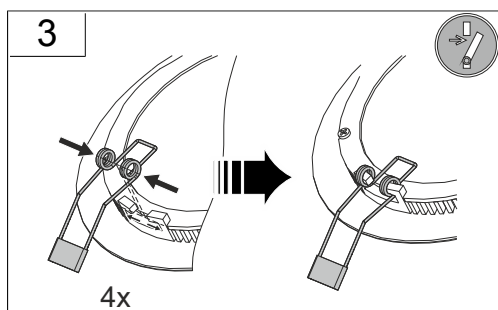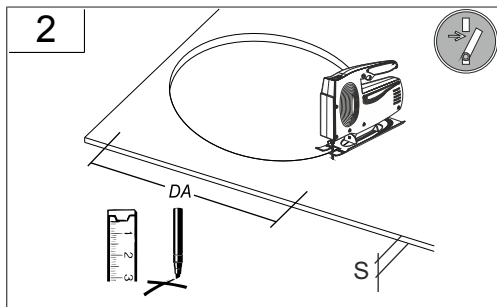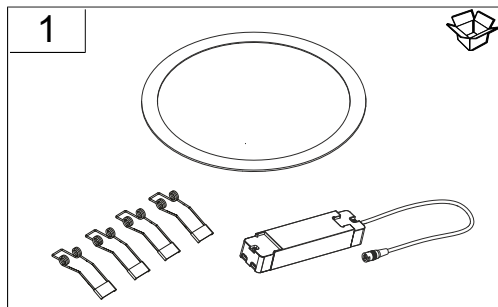





8








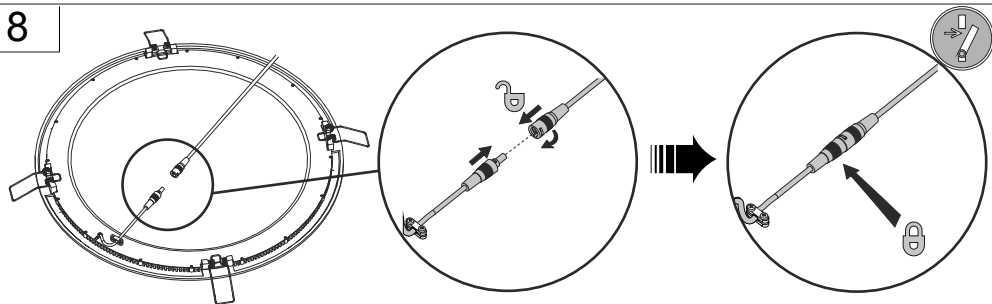


9

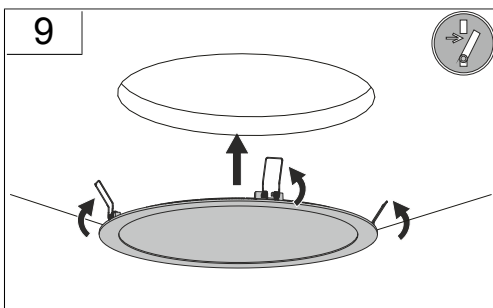




10

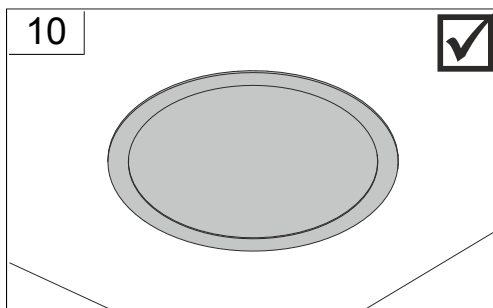

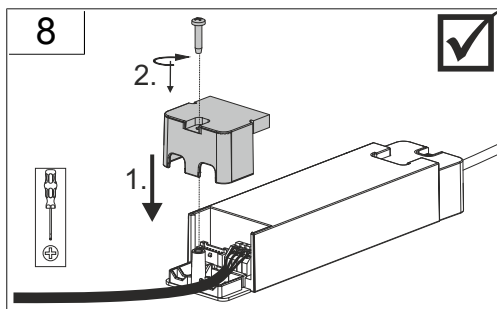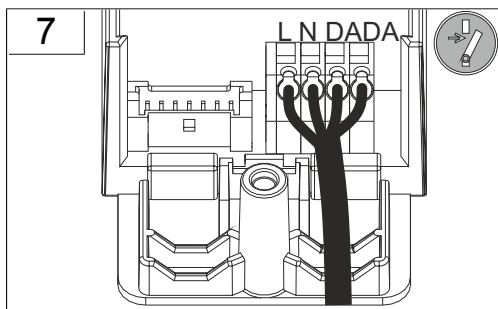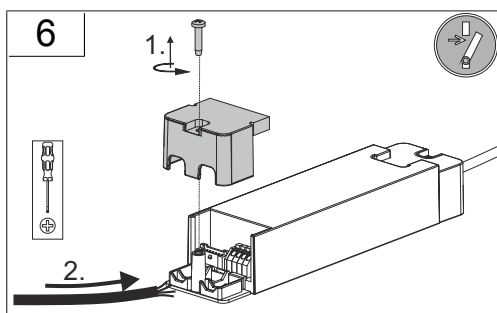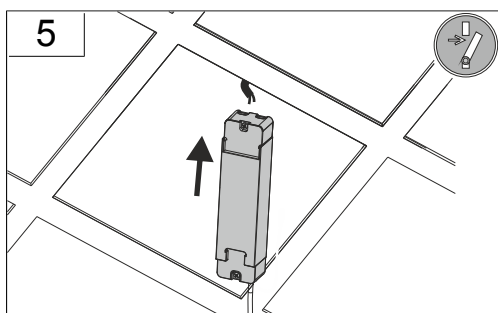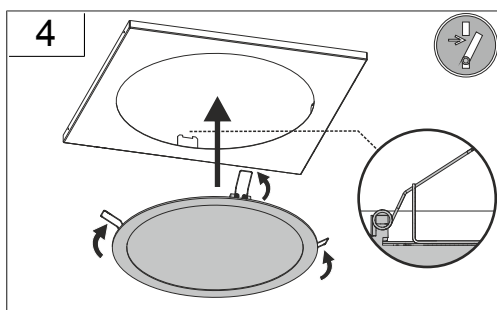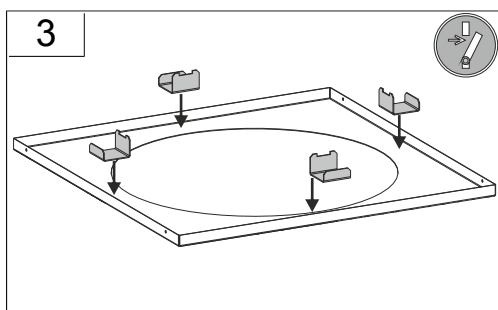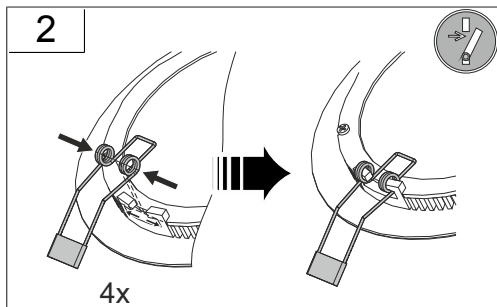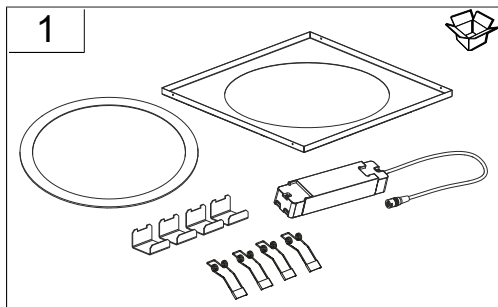





9

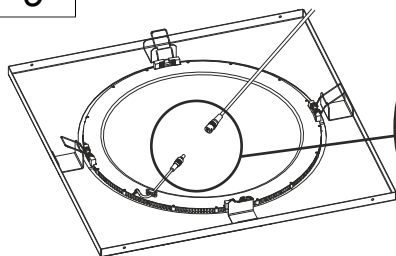

10

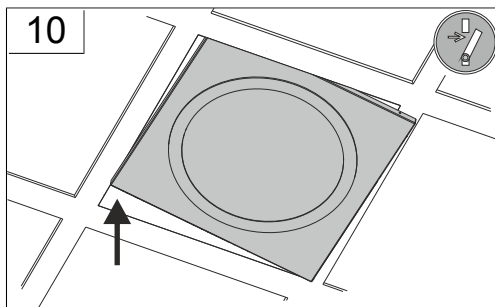


11

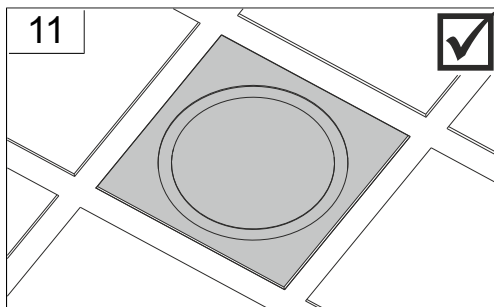





1

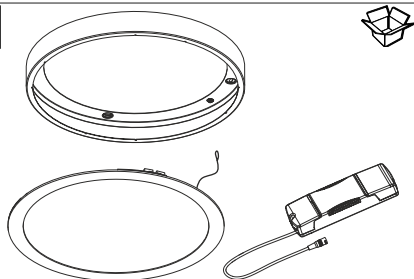


2



3

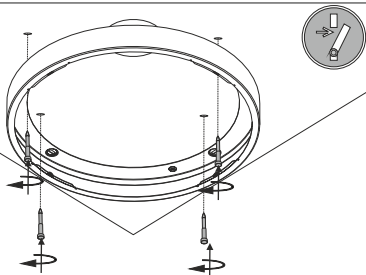


4

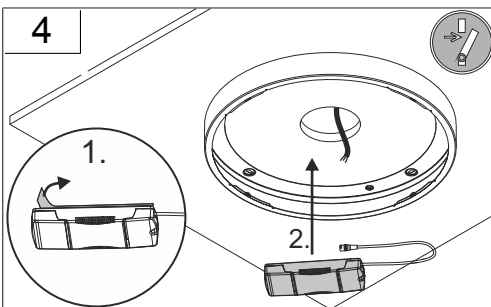

5


PRI

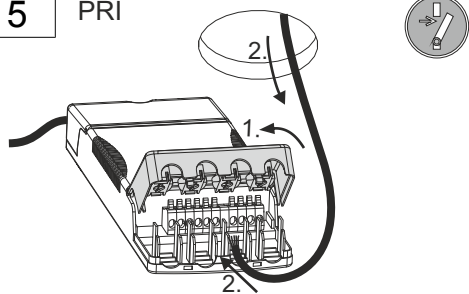


6






PRI

DALI

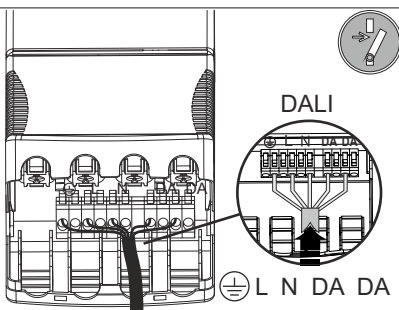

7

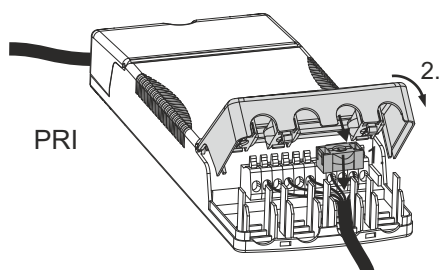

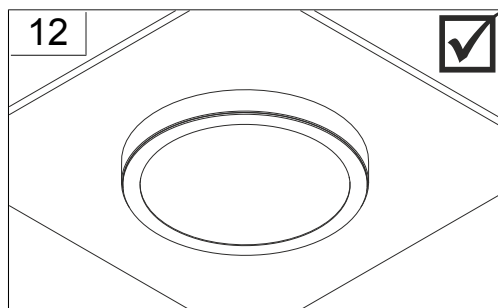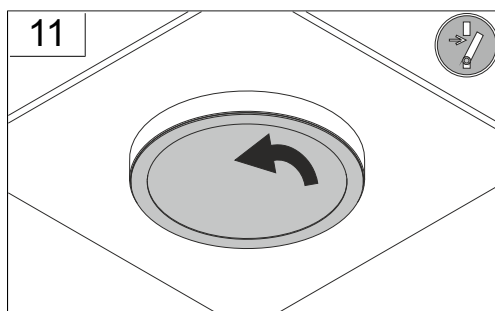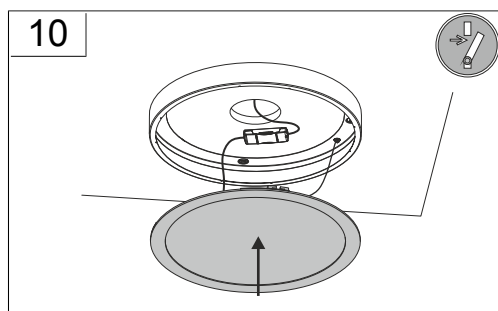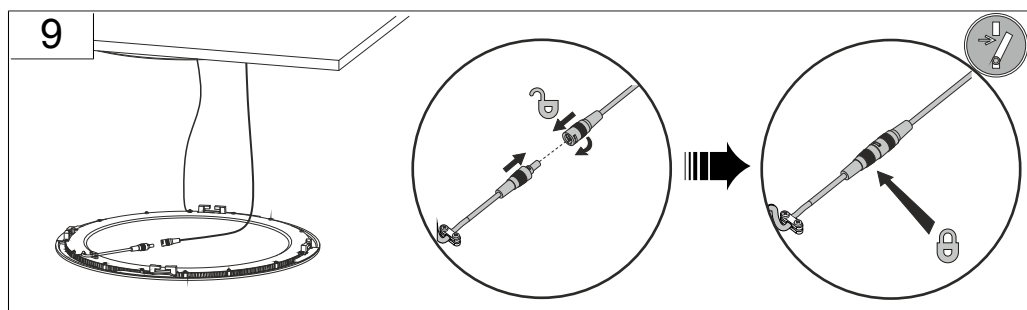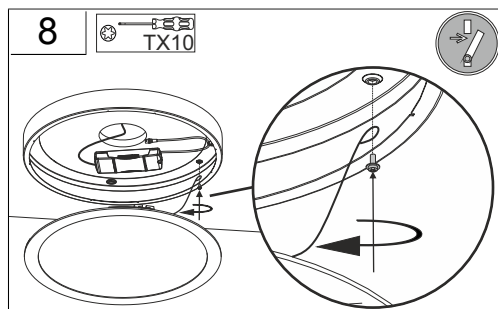



	982182.002	L 595, B 595, H 36	2,06 kg
	982183.002	L 622, B 622, H 36	2,36 kg
	982181.002	D 500, H 57	1,39 kg