
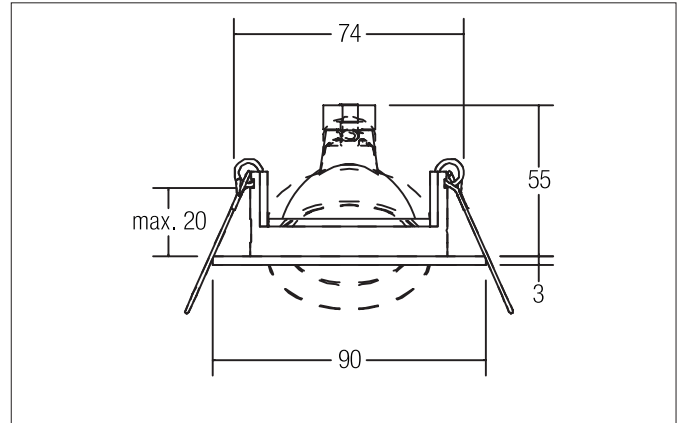


**KALINDA-R Recessed spot, GX5,3**

Article no. 20353070

Light.  
For Generations.**Tender**

Recessed spot, GX5,3, white matt, Round. In a compact design, for installation in tool-less rapid assembly systems. Mounting method: Recessed mounting, Place of installation: Ceiling-mounted, Material: Aluminium, Degree of protection: according to DIN EN 60529 IP20, Protection class: (EN 61140) III, Voltage: 12V, Power: 50 W, Amount of light sources / fittings: 1 Qty, Adjustability: Pivoted, without control gear, Dimmable: Depending on type of control gear, Control: Depending on driver.

**Product Benefits**

- Recessed spotlight in round design made of solid aluminum for LED retrofit lamps with GX5.3 base.
- Ceiling cut-out 74 mm, diameter 90 mm, installation depth 55 mm, IP20.
- Swivel range 40°.
- Without visible snap ring.
- Classic, formally restrained design.
- Also available in the same look as GU10 version, as a switchable and dimmable set (trailing edge).

**KALINDA-R Recessed spot, GX5,3**

Article no. 20353070

Light.  
For Generations.

| Article data       |                      |
|--------------------|----------------------|
| Article no.        | 20353070             |
| GTIN               | 4251433918196        |
| Series name        | KALINDA-R            |
| Short description  | Recessed spot, GX5,3 |
| Material           | Aluminium            |
| Colour             | White                |
| Type of surface    | Matt                 |
| Shape              | Round                |
| Outer diameter     | 90 mm                |
| Built-in diameter  | 74 mm                |
| Installation depth | 55 mm                |
| Hight              | 3 mm                 |
| Weight             | 0.141 kg             |
| Conformance        | CE, UKCA             |

| Lighting technology          |           |
|------------------------------|-----------|
| Light output                 | Direct    |
| Light sharing                | Symmetric |
| Adjustable color temperature | No        |

| Operating technology of the luminaire |                                   |
|---------------------------------------|-----------------------------------|
| System output                         | 50 W                              |
| Voltage type                          | AC/DC                             |
| AC nominal voltage max                | 12 V                              |
| Frequency max                         | 50 Hz                             |
| Lamp                                  | For LED-retrofill lamp            |
| Protection class                      | III                               |
| Degree of protection                  | IP20                              |
| Dimmable                              | Depending on type of control gear |
| Control                               | Depending on driver               |
| Bulb change possible                  | Yes                               |

| Mounting technology    |                                           |
|------------------------|-------------------------------------------|
| Mounting method        | Recessed mounting                         |
| Place of installation  | Ceiling-mounted                           |
| Adjustability          | Pivoted                                   |
| Swivel angle           | 40°                                       |
| Max. ceiling thickness | 20 mm                                     |
| Further references     | No cover with thermal insulation material |
| Material cover         | Without cover                             |
| Circlip                | Without circlip                           |

| Packing data            |                                                                                                                                                                                                                                                                                                                                                                                |
|-------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Gross weight            | 0.173 kg                                                                                                                                                                                                                                                                                                                                                                       |
| Length of packaging     | 100 mm                                                                                                                                                                                                                                                                                                                                                                         |
| Packaging width         | 100 mm                                                                                                                                                                                                                                                                                                                                                                         |
| Packaging hight         | 100 mm                                                                                                                                                                                                                                                                                                                                                                         |
| Disposal at end of life | <p>This product must not be disposed of with household waste. You are obliged, to dispose of such electrical waste separately.</p> <p>By disposing of electrical waste and other old or defective electronics separately, you support recycling or other forms of re-use. In that way you help to take care and to avoid that harmful substances get into the environment.</p> |