


INSTRUCTION

Flat Basic
211394.002



RZB
LIGHTING


~ 220 - 240 V 50/60 Hz IP 43, IP 44 IK02



3 x 1,5 mm²



2,50 mm²



D 370, H 118

LED

2,7 kg

Φ_{lm}

P_{lm}

P_{lm}

1200

11

1 x 10,3 W

CCT [K]

CRI

RG

EEK

EEK


3000

80

RG 1

A++

A++



1,7 A / 40 µs



50



80




50



80

P_f

0,99



INSTRUCTION
WARTUNGSPLAN/
MAINTENANCE
SCHEDULE

DIN EN 61340-5-1




EN 12464
EN 13201




EN 12464
EN 13201



INSTRUCTION
WARTUNGSPLAN/
MAINTENANCE
SCHEDULE



EN 12464




2020-11-17

www.rzb.de


1




1





2




3

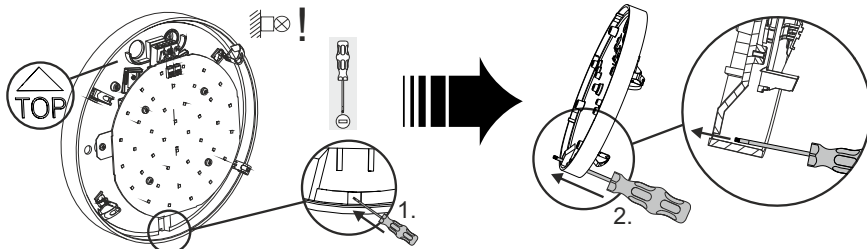


4




5



6



7



Bei Fragen zu unseren Symbolen,
besuchen Sie folgende Webseite:


If you have any questions about our
signs, visit the following website:



www.rzb.de/fileadmin/assets/downloads/PDF/RZB_Symbolklaerung.pdf

		 [mm]	
	981129.002	D 390, H 10	529 g
	981129.004	D 390, H 10	501 g

		 [mm]	
	05-211059.002	D 370, H 108	1,8 kg

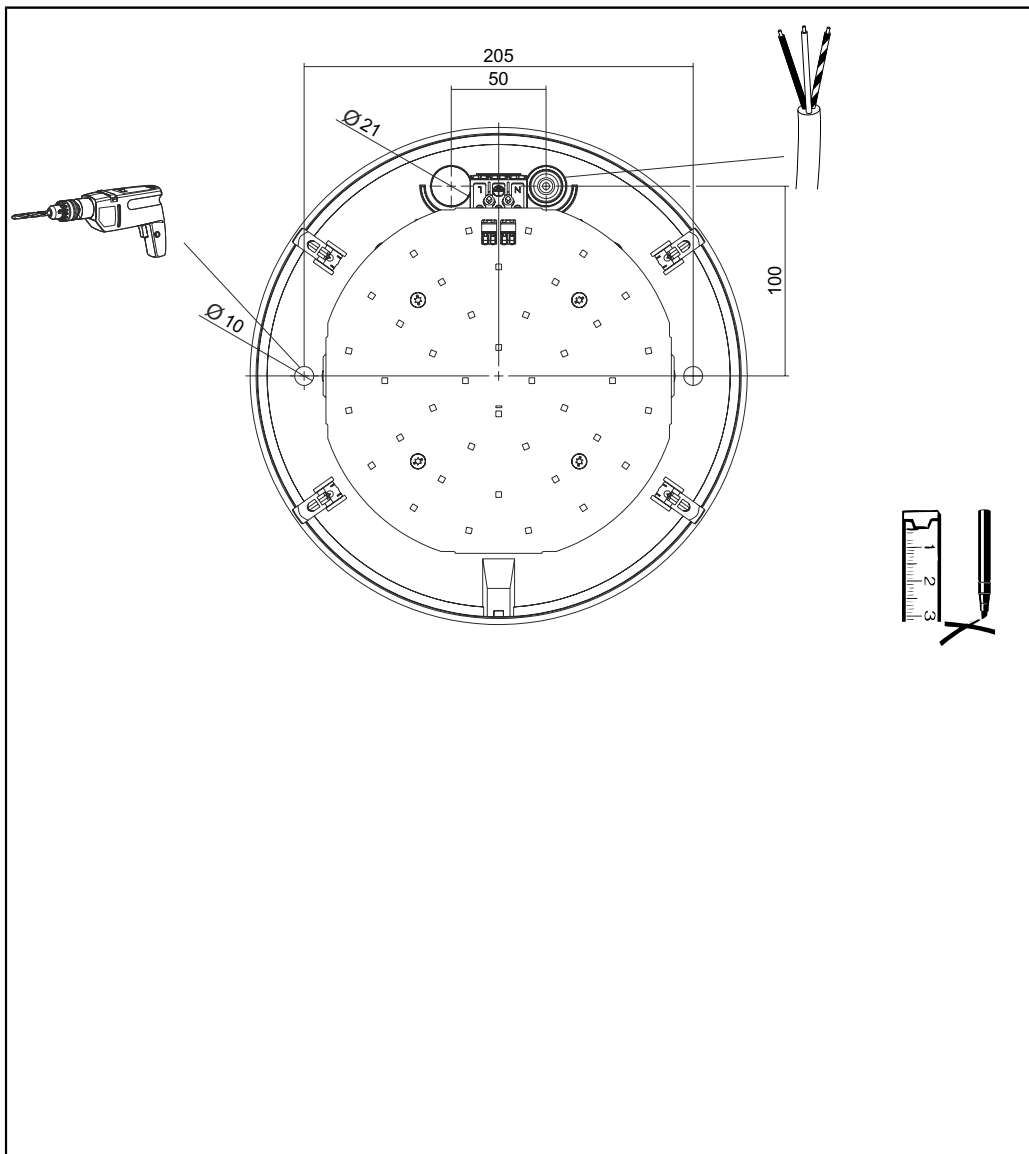

RZB - Rudolf Zimmermann, Bamberg GmbH
Rheinstraße 16
96052 Bamberg

☎ 0951/7909-0
Fax: 0951/7909-198

E-mail: info@rzb-leuchten.de