


INSTRUCTION


HB 207
721993.0031



~ 220 - 240 V 50 Hz IP 65 IK06



Umgebungstemperatur /
temperature ambiante
=> -20 °C ... + 25 °C



L 136, B 90, H 210



LED



1,41 kg

Φ [lm]

680

P [W]

10

P

1 x 10 W

CCT [K]

3000

CRI

80

RG

RG 1

EEK

A++

EEK

A+



15 A / 10 μ s



100



160



INSTRUCTION
WARTUNGSPLAN/
MAINTENANCE
SCHEDULE



DIN EN 61340-5-1



EN 12464
EN 13201



EN 12464
EN 13201



EN 12464




2020-10-05

www.rzb.de


1




1

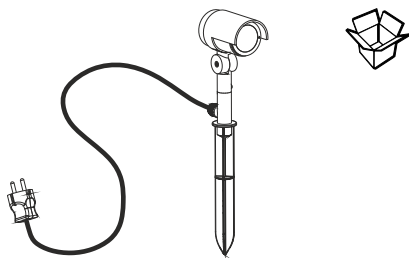


2

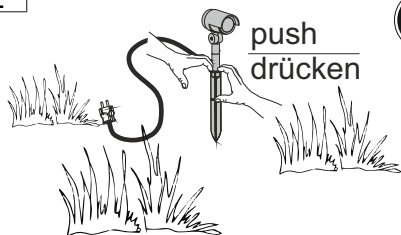


3

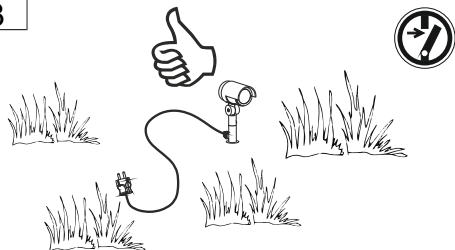


4

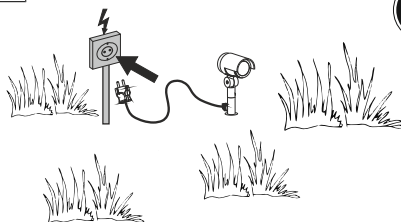

5

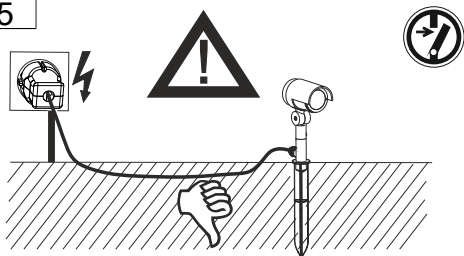

6

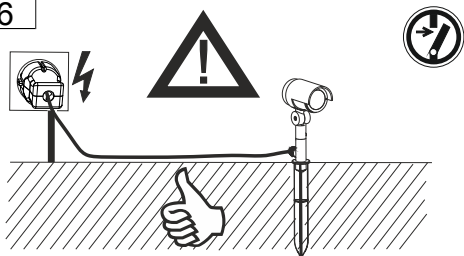

7





Bei Fragen zu unseren Symbolen,
besuchen Sie folgende Webseite:






If you have any questions about our
signs, visit the following website:

www.rzb.de/fileadmin/assets/downloads/PDF/RZB_Symbolklaerung.pdf



0°-90°

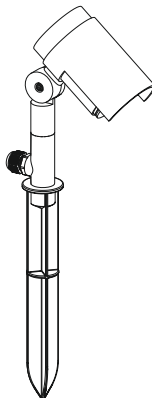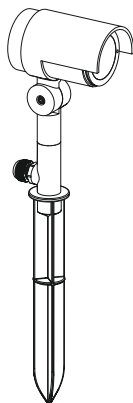

RZB - Rudolf Zimmermann, Bamberg GmbH

Rheinstraße 16
96052 Bamberg

Telefon: 0951/7909-0
Telefax: 0951/7909-198

E-mail: info@rzb-leuchten.de