


# INSTRUCTION

Calido  
742131.002



**RZB**  
LIGHTING

~ 220 - 240 V 50/60 Hz IP 20



742131.002

D 110, H 215

1,23 kg



LED

1 x 34 W

38 W

3650 lm

**CCT**

**CRI**

**EEK**


**EEK**

3000 K

80

A++

A++



21,2 A / 196 µs

2

3

4

7



DIN EN 61340-5-1



EN 12464  
EN 13201



<100%



100%







EN 12464




2019-05-20

www.rzb.de

1

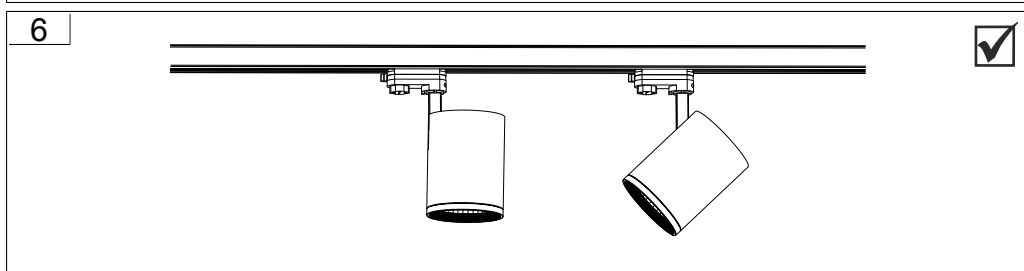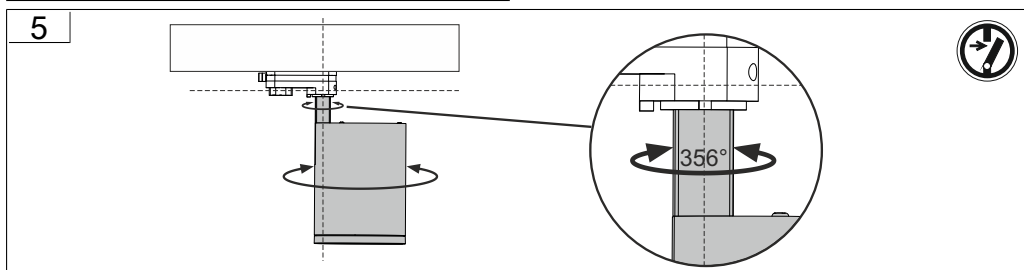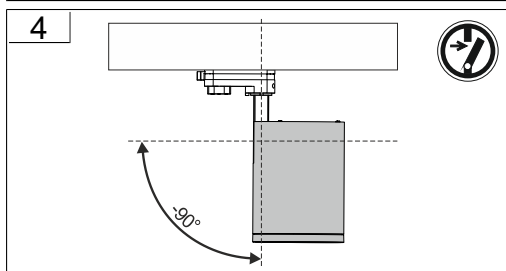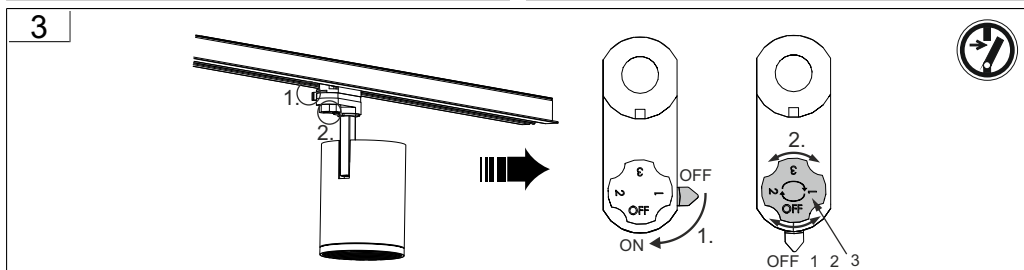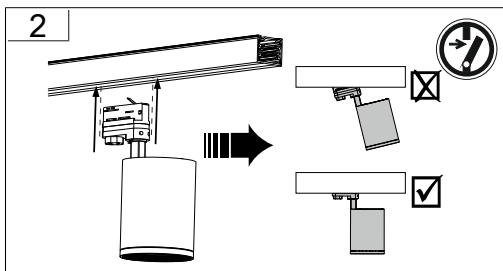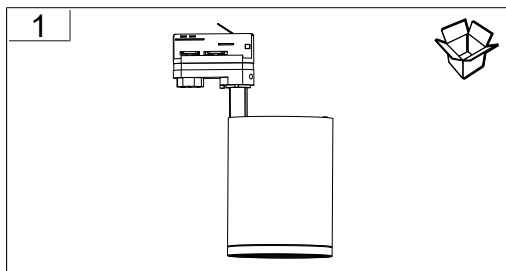



Clickbeam


|          | $I_n$  | Power factor /<br>Leistungsfaktor |
|----------|--------|-----------------------------------|
| 742129.* | 58 mA  | > 0,9                             |
| 742130.* | 116 mA | > 0,9                             |
| 742131.* | 179 mA | > 0,9                             |
| 742132.* | 237 mA | > 0,9                             |

Only to be installed outside  
arms reach. /

Nur zur Installation außerhalb  
des Handbereichs vorgesehen.

Die in dieser Leuchte enthaltene Lichtquelle darf nur vom Hersteller oder seinem Kundendienst oder einer ähnlich qualifizierten Person ersetzt werden. /

The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.



982405.003

D 90, H 8,

12 g







RZB - Rudolf Zimmermann, Bamberg GmbH

Rheinstraße 16  
96052 Bamberg

Telefon: 0951/7909-0  
Telefax: 0951/7909-198

E-mail: [info@rzb-leuchten.de](mailto:info@rzb-leuchten.de)