

INSTRUCTION

LINEDO

952360.830.500.003



RZB
LIGHTING

≈ 220 - 240 V 0/50/60 Hz IP 54 IK03



5 x 2,5 mm²



Umgebungstemperatur /
temperature ambiante
=> -25 °C ... + 45 °C



L 2291, B 58, H 76



LED



5,25 kg

Φ [lm]

15300

P [W]

104

P

4 x 19,7 W

CCT [K]

3000

CRI

80

RG

RG 1

EEK

A++

EEK

A++



5 A / 1700 µs

B₁₀ [St.]

18

B₁₆ [St.]

32

C₁₀ [St.]

21

C₁₆ [St.]

34

P_f

0,98




INSTRUCTION
WARTUNGSPLAN/
MAINTENANCE
SCHEDULE

DIN EN 61340-5-1



EN 12464
EN 13201






EN 12464
EN 13201



INSTRUCTION
WARTUNGSPLAN/
MAINTENANCE
SCHEDULE



EN 12464



2020-12-10

www.rzb.de

1



1



2a



	L	X*
4547 mm	$\leq 4500 \text{ mm}$	$\leq 60000 \text{ mm}$
2291 mm	$\leq 2270 \text{ mm}$	$\leq 50000 \text{ mm}$

* $R_{PE} < 0,5 \Omega$
EN 60598

2b



	L	X*
4547 mm	$\leq 4500 \text{ mm}$	$\leq 60000 \text{ mm}$
2291 mm	$\leq 2270 \text{ mm}$	$\leq 50000 \text{ mm}$

* $R_{PE} < 0,5 \Omega$
EN 60598

2c



	L	X*
4547 mm	$\leq 2200 \text{ mm}$	$\leq 60000 \text{ mm}$
2291 mm	$\leq 1100 \text{ mm}$	$\leq 50000 \text{ mm}$

* $R_{PE} < 0,5 \Omega$
EN 60598





2d

210 mm

500 mm

$A \leq 500 \text{ mm}$

	L	* X
4547 mm	$\leq 2200 \text{ mm}$	$\leq 60000 \text{ mm}$
2291 mm	$\leq 1100 \text{ mm}$	$\leq 50000 \text{ mm}$

$\leq 7 \text{ kg}$

$2x$

* $R_{PE} < 0,5 \Omega$
EN 60598

Diagram showing the correct and incorrect way to install the fixture. The correct way is to install it with the correct dimensions (L and X) and the correct number of fixtures (2x). The incorrect way is to install it with the wrong dimensions or the wrong number of fixtures.

4547 mm
2291 mm $\geq 2x$

$< 2291 \text{ mm} \geq 1x$

3

Shopping cart icon +

Diagram showing the correct and incorrect way to install the fixture. The correct way is to install it with the correct dimensions (L and X) and the correct number of fixtures (2x). The incorrect way is to install it with the wrong dimensions or the wrong number of fixtures.

4

$\varnothing 5,2$

SW 14

Diagram showing the correct and incorrect way to install the fixture. The correct way is to install it with the correct dimensions (L and X) and the correct number of fixtures (2x). The incorrect way is to install it with the wrong dimensions or the wrong number of fixtures.

5

24 mm

SW 7

Diagram showing the correct and incorrect way to install the fixture. The correct way is to install it with the correct dimensions (L and X) and the correct number of fixtures (2x). The incorrect way is to install it with the wrong dimensions or the wrong number of fixtures.



6a





6b



7




8



≤ 12 kg



9a

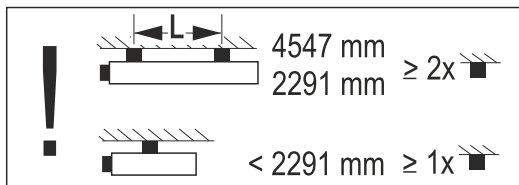

4547 mm

2291 mm

≥ 2x

< 2291 mm

≥ 1x









13b



14





Bei Fragen zu unseren Symbolen,
besuchen Sie folgende Webseite:

If you have any questions about our
signs, visit the following website:



www.rzb.de/fileadmin/assets/downloads/PDF/RZB_Symbolklaerung.pdf



Pendelmontage / Pendant mounting
Einspeisung von der Seite / Feed from the side



Deckenmontage / Ceiling mounting
Einspeisung von der Seite / Feed from the side



Pendelmontage / Pendant mounting
Einspeisung von Oben / Feed from above



Deckenmontage / Ceiling mounting
Einspeisung von Oben / Feed from above

Stecker / Plug





Buchse / Socket



Pendelmontage /
Pendant mounting



Deckenmontage /
Ceiling mounting



Hinweis zum Einsatz von Leuchten mit -Kennzeichnung nach EN 60598-2-24

Reference for application of lumiaires with - marking according to EN 60598-2-24



IP 4x

Umgebung ohne Staubablagerung
Environment without dust deposit



IP 5x

Umgebung mit nicht elektrisch leitender Staubablagerung
Environment with non-electrically conductive dust deposit



IP 6x

Umgebung mit elektrisch leitender Staubablagerung
Environment with electrically conductive dust deposit



	982678.000.2	Einspeisung Feed	L 312, B 58, H 76	673 g
	982678.000.3	Einspeisung Feed	L 330, B 58, H 76	673 g
	982698.000.3	Einspeisung Feed	L 330, B 58, H 76	751 g
	982698.000.4	Einspeisung Feed	L 312, B 58, H 76	751 g
	982698.000.5	Einspeisung Feed	L 349, B 58, H 76	751 g
	982661.000	Pendelset Pendant kit	, LP 1500	56 g
	982662.000	Pendelset Pendant kit	, LP 1500	240 g
	982663.000	Befestigungsset Fixture	L 33, B 54,	63 g
	982664.000	Befestigungsset Fixture	L 33, B 54,	39,1 g
	982665.000	Pendelset Pendant kit	, LP 1500	80 g
	982717.000	Pendelset Pendant kit	, LP 5000	190 g
	982718.000	Pendelset Pendant kit	L 54, B 30, H 14, LP 5000	240 g



	982719.000	Pendelset Pendant kit	L 54, B 30, H 42, LP 5000	270 g
	982580.010	Deckenmontageset Ceiling surface mounting kit	L 70, B 28, H 16	44 g
	982666.000	Befestigungsset Fixture	L 70, B 54, H 22	25 g
	982699.009	Endkappe End cap	L 16, B 58, H 76	21,5 g
	982700.009	Endkappe End cap	L 23, B 58, H 76	31 g
	982680.000	Verbinder Connector	L 300, B 48, H 9	181 g



RZB - Rudolf Zimmermann, Bamberg GmbH
Rheinstraße 16
96052 Bamberg

☎ 0951/7909-0
Fax: 0951/7909-198

E-mail: info@rzb-leuchten.de