


BRUMBERG


# LED recessed profile BIRO40

**Artikel-Nr. 77023084**

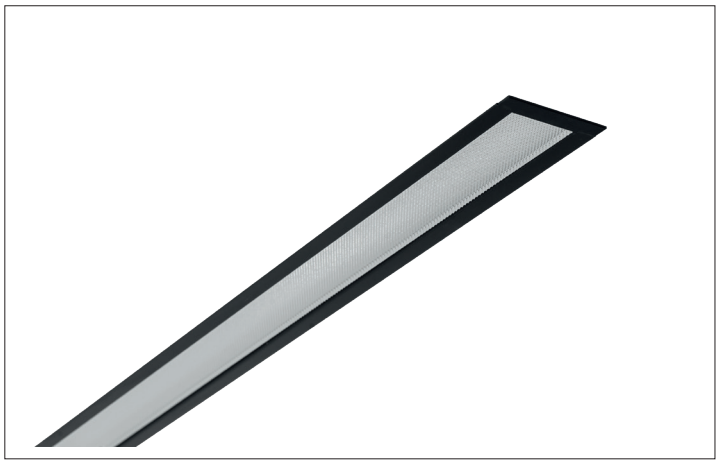




LED recessed profile BIRO40, black, rectangular. LED light channel with microprismatic cover. Lamp holder: LED, Mounting method: Recessed mounting, Place of installation: Ceiling-mounted, Material: Aluminium / Acrylic, Degree of protection: according to DIN EN 60529 IP20, Protection class: (EN 61140) I, Voltage: 230V AC 50Hz, Power: 17.9W, Luminous flux: 1.620lm, Colour temperature: 4000 K, Light colour : White, Beam angle: 80°, Adjustability: Not adjustable, With control gear: Yes.

| | |
|---|---|
| **Artikel-Nr.** | **77023084** |
| **Stand:** | 19.07.2021 17:44 |

| | |
|---|---|
| control | DALI |
| Colour | Black |
| Colour of light | 4000 K |
| Glare evaluation | UGR < 19 |
| System efficiency | 90 lm/W |
| Luminous flux | 1,620 lm |
| Material cover | Microprismatic |
| Length | 1158 mm |
| Built-in length | 1141 mm |
| Colour rendering | CRI > 90 |
| Beam angle | 80 ° |

| | |
|---|---|
| Width | 59 mm |
| Built-in width | 45 mm |
| Installation depth | 110 mm |
| Material | Aluminium / Acrylic |
| Voltage | 230V AC 50Hz |
| Lamp | LED |
| Light output | Direct |
| Degree of protection | IP20 |
| Protection class | I |
| Voltage type | AC |
| Adjustability | Not adjustable |

Alle technischen Daten wie Lichttechnische-, Gewichts- und Maßangaben basieren auf Bemessungswerten und sind sorgfältig erstellt. Die mögliche Toleranz der Farbtemperatur beträgt +/- 150K. Die Leistung und Lichtstrom unterliegen initial einer Toleranz von +/- 10%.Die Werte gelten, wenn nicht anders beschrieben, für eine Umgebungstemperatur von 25°C. Technische Änderungen und Irrtümer vorbehalten. Alle Preisangaben verstehen sich als (UVP) in Euro ohne MwSt. Bestellung erfolgt zu unseren Allgemeinen Verkaufsbedingungen unter www.brumberg.com/de/agb/allgemeine-verkaufsbedingungen/.