

INSTRUCTION

11-2016

RZB
LIGHTING

Kreis



211416.002

 IP 43, IP 44 IK02    220 - 240 V / 50 - 60 Hz

 LED

 3 x 1,5 mm²

 2,50 mm²

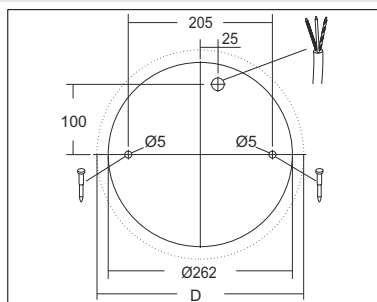

				
211416.002	D 280, H 120	1 x LED 13,6 W ⁽¹⁾	14 W	2,21 kg
Φ 	EEK _{LED}	EEK 	CRI	CCT
1150 lm	A+	A+	80	3000K



Die Leuchte darf nur mit ihren vollständigen Schutzabdeckungen betrieben werden.
The luminaire must be used with its complete protective covers only.

EN 12464



EN 12464




EN 12464




RZB
Rudolf Zimmermann,
Bamberg GmbH
Rheinstraße 16
D-96052 Bamberg
Deutschland
Telefon +49 951/79 09-0
Telefax +49 951/79 09-198
www.rzb.de
info@rzb-leuchten.de




1




2




3




4

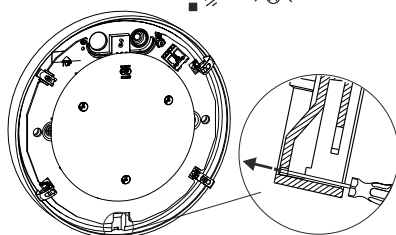


5

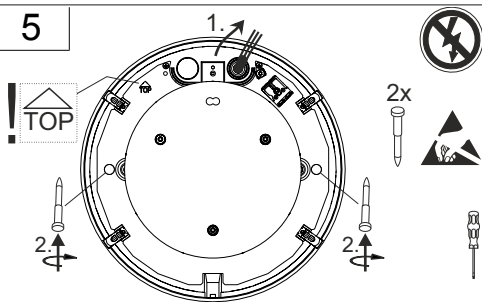

6








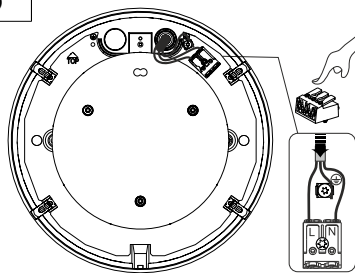


7



8



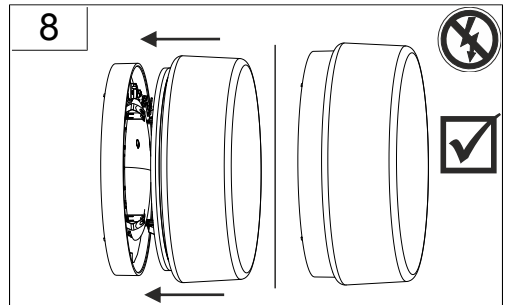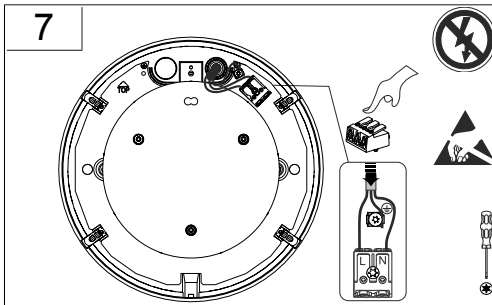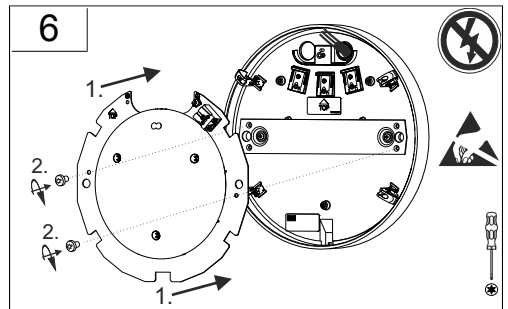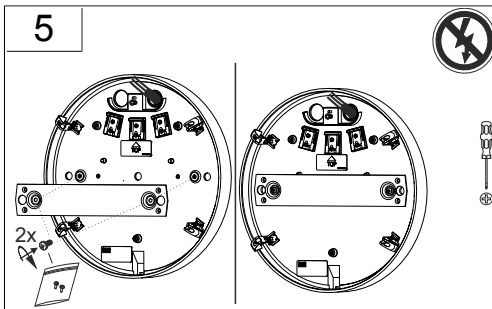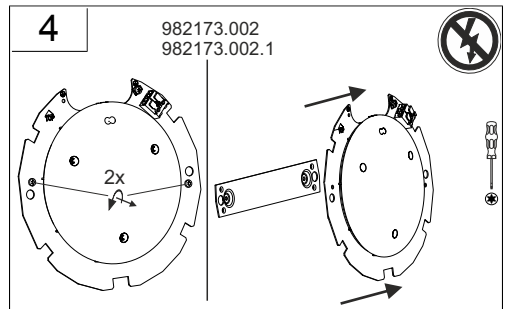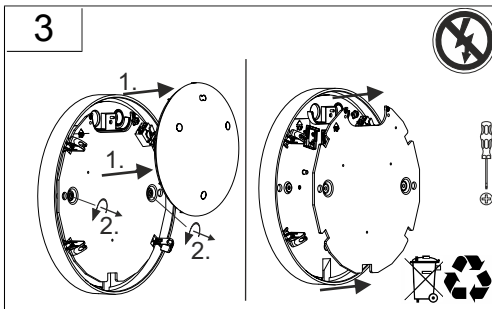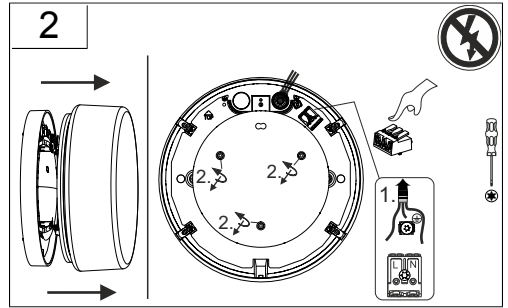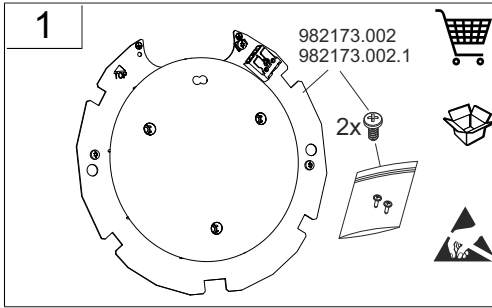



	05-21102	Ersatzglas D 280, H 99	1,3 kg
	982173.002	D 230, H 26	670 g