


LEPO-1 068.2030/DALI

Lepo | Single (1xLED 16W 830/3000K 2020lm)

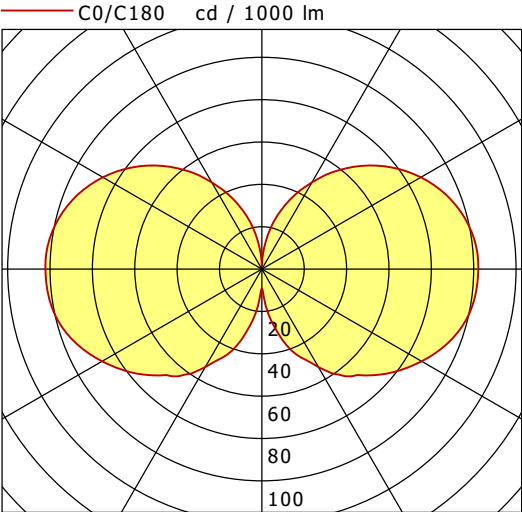

	C0	C90	C180	C270
0°	9	9	9	9
30°	53	53	53	53
60°	87	87	87	87
90°	102	102	102	102
120°	87	87	87	87
150°	47	47	47	47
180°	2	2	2	2
cd / 1000 lm				

LDC unsuitable for cone representation.
The C0 angle is oversized.

η	LED
Efficiency	126 lm/W
Direct/Indirect	↓ 51% / ↑ 49%
System Power	16 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	18.2
UGR C90/C270	18.2
CIE Flux Codes	15 40 69 51 100
Ra/CRI	> 80