


INSTRUCTION

Quadrat
211412.002



RZB
LIGHTING


~ 220 - 240 V 50/60 Hz IP 43, IP 44 IK02



3 x 1,5 mm²



2,50 mm²



L 280, B 280, H 120



LED



1 x 13 W



990



13



A+



A+



2,94 kg

CCT [K]

3000

CRI

83

RG

RG 1



0,15 A / 300 µs



136




218



136



218



DIN EN 61340-5-1




EN 12464
EN 13201



EN 12464
EN 13201










EN 12464



2020-01-28

www.rzb.de

1

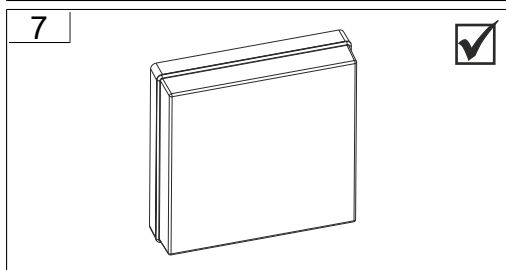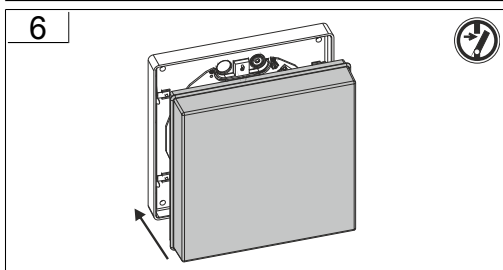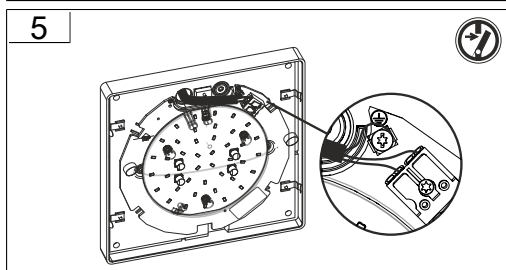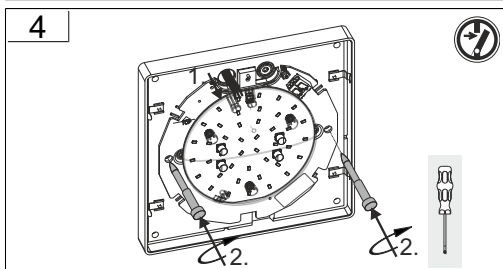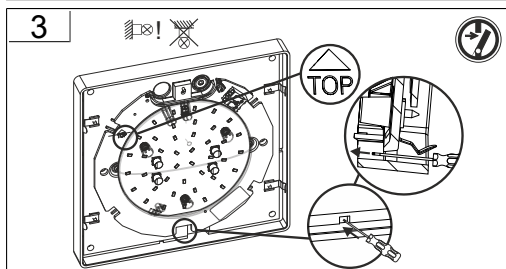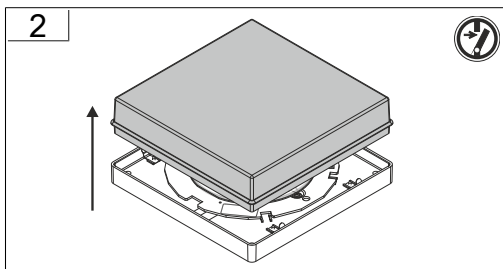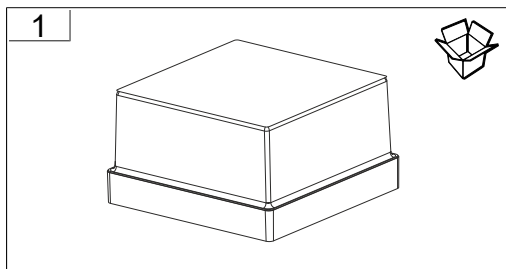



Bei Fragen zu unseren Symbolen, besuchen sie folgende Webseite:
If you have any questions about our signs, visit the following website:

www.rzb.de/fileadmin/assets/downloads/PDF/RZB_Symbolklaerung.pdf






	05-21129	L 280, B 280, H 106 2 kg
	982173.002	D 230, H 26 670 g







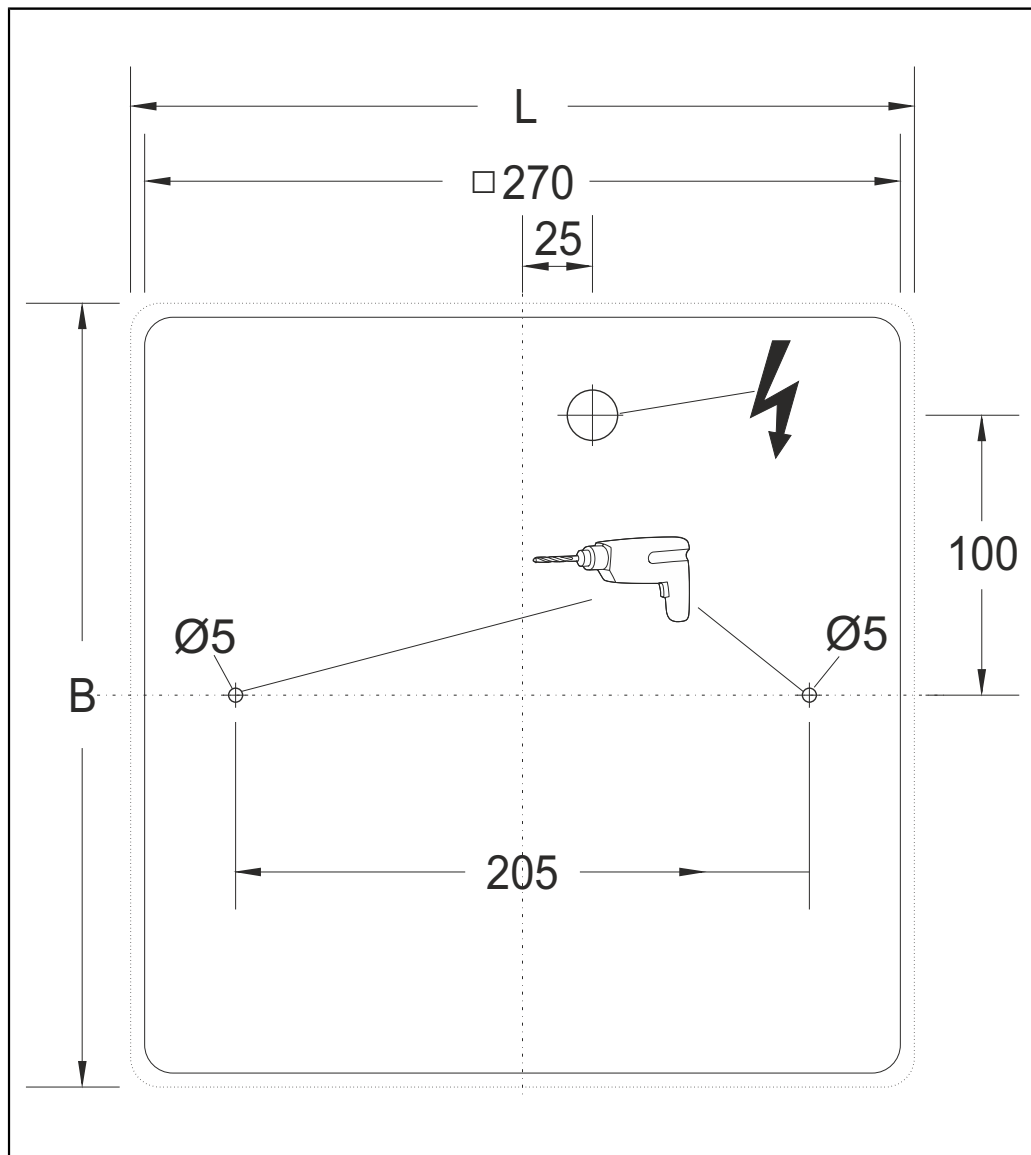

RZB - Rudolf Zimmermann, Bamberg GmbH

Rheinstraße 16
96052 Bamberg

Telefon: 0951/7909-0
Telefax: 0951/7909-198

E-mail: info@rzb-leuchten.de