




INSTRUCTION

04-2018

RZB
LIGHTING

Lightstream LED

721719.1131.76



721719.1131.76

L 315, B 276, H 180

3,4 kg



P

P

Φ

CCT

CRI

LED

2 x 27 W

54 W

6050 lm

3000 K

80

EEK

EEK

I max T₅₀ T₁ max/2

B10

B16

C10

C16

A++

A++



10 A / 200 µs

19

30

31

51



Die Leuchte darf nur mit ihren vollständigen Schutzabdeckungen betrieben werden.
The luminaire must be used with its complete protective covers only.

EN 12464



EN 12464
EN 13201




EN 12464 / EN 13201
Wartungsplan/
Maintenance
schedule




RZB
Rudolf Zimmermann,
Bamberg GmbH
Rheinstraße 16
D-96052 Bamberg
Deutschland
Telefon +49 951/79 09-0
Telefax +49 951/79 09-198
www.rzb.de
info@rzb-leuchten.de




1




2




3




4




open close 1. open close














5



6

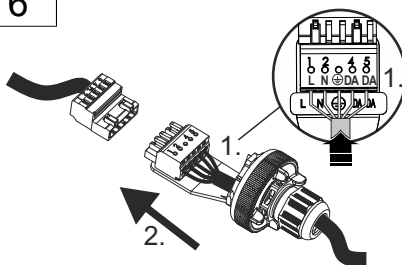


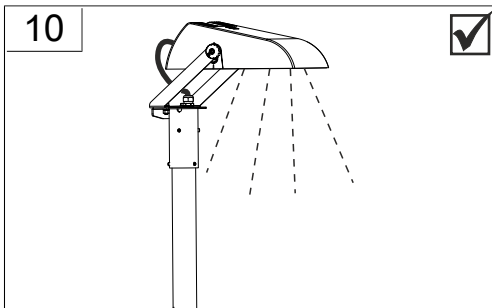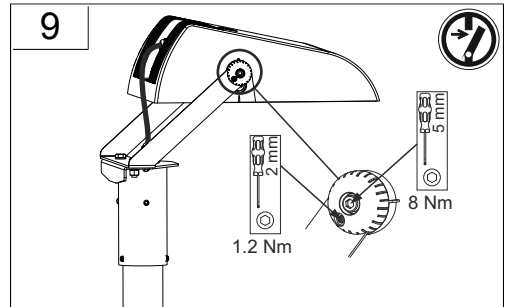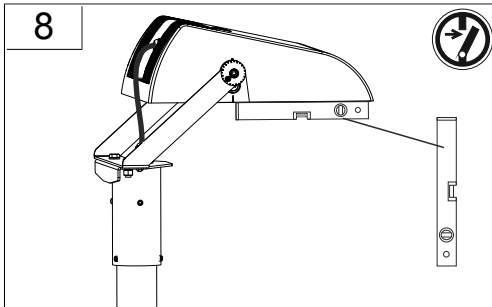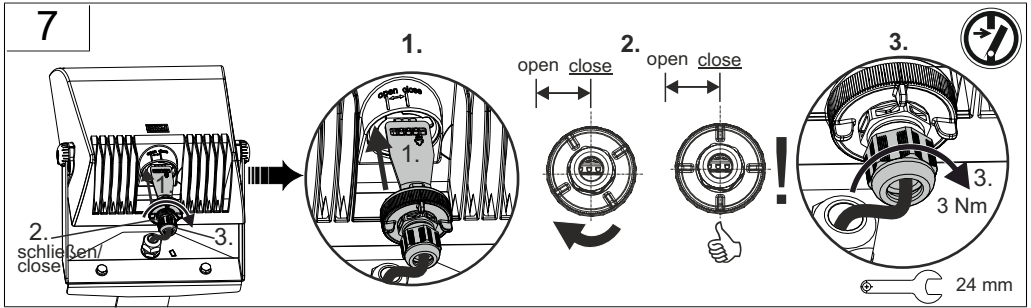

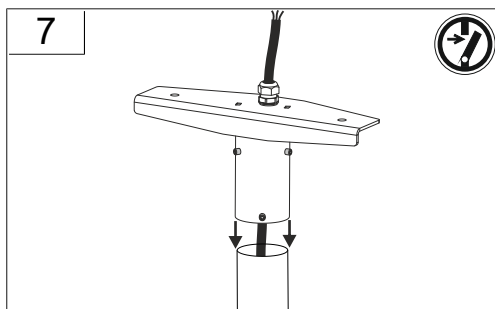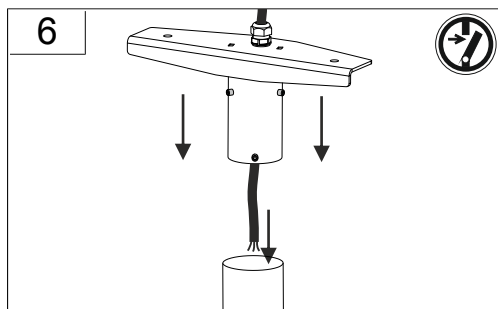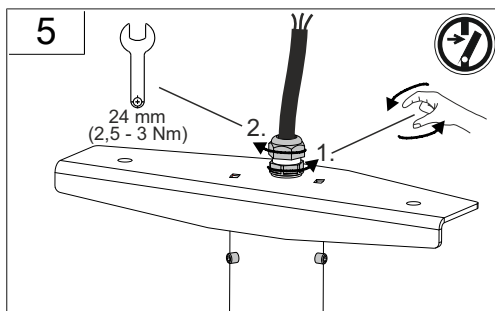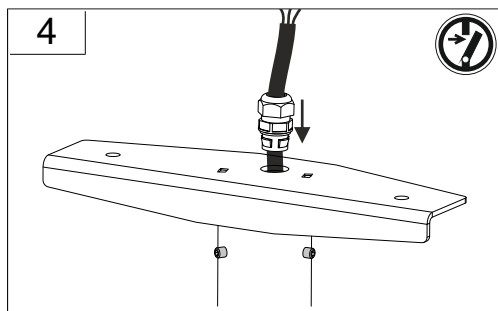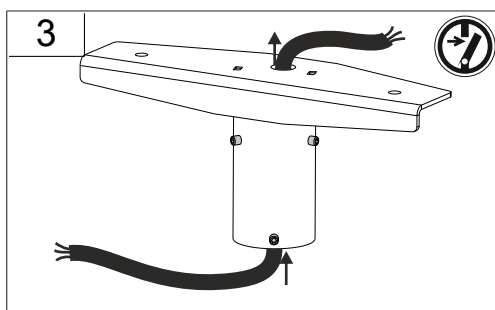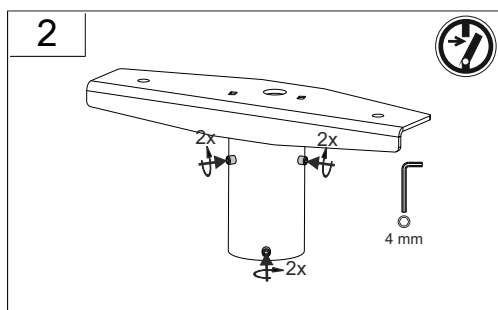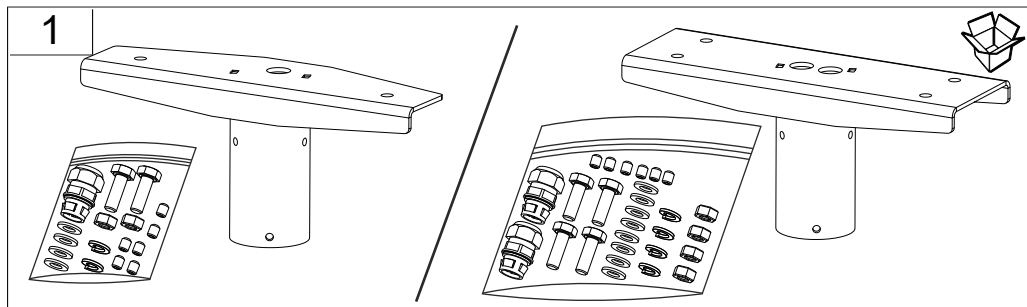






8

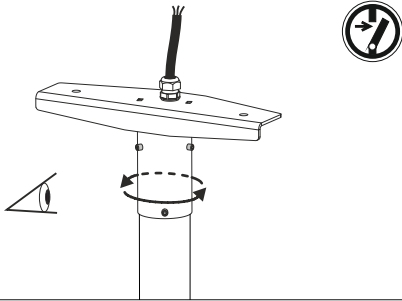

9

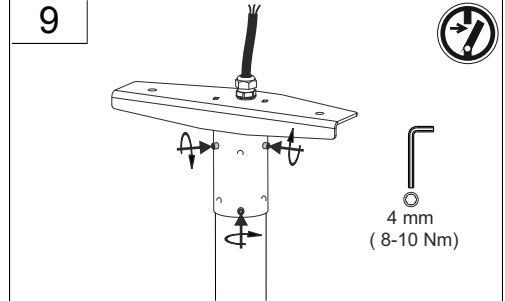

10

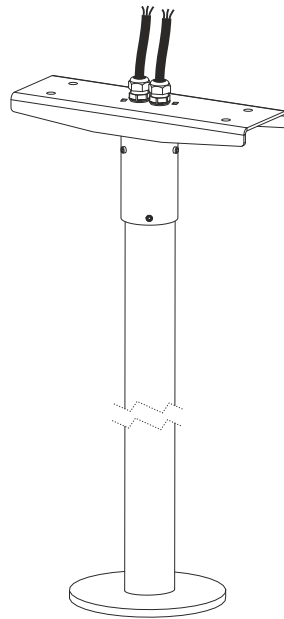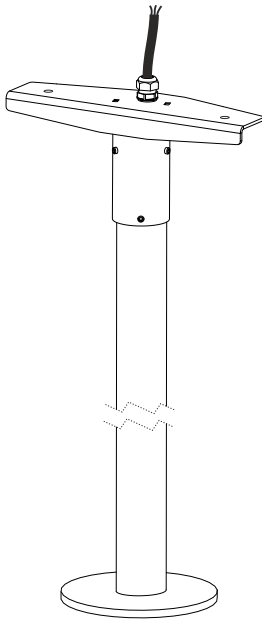



Hinweis zum Einsatz von Leuchten mit -Kennzeichnung nach EN 60598-2-24

IP 4x  Umgebung ohne Staubablagerung

IP 5x  Umgebung mit nicht elektrisch leitender Staubablagerung

IP 6x  Umgebung mit elektrisch leitender Staubablagerung
Maximale Umgebungstemperatur
beim Einsatz der Leuchte in solcher
Umgebung beträgt nur 25° C!

Reference for application of lumaires with - marking according to EN 60598-2-24

IP 4x  Environment without dust deposit

IP 5x  Environment with non-electrically conductive dust deposit








IP 6x  Environment with electrically conductive dust deposit
Maximum ambient temperature
when using the luminaire in such
an environment is only 25 ° C!

DIN 4844




Vor Installation, Wartung oder Reparatur freischalten/
power off before installation, maintenance or repair





	982047.000	L 250, B 95, H 153,	1,9 kg
	982047.0031	L 250, B 95, H 153,	1,9 kg
	982048.000	L 250, B 95, H 153,	2,2 kg
	982048.0031	L 250, B 95, H 153,	2,2 kg
	982049.000	L 250, B 114, H 153,	2,2 kg
	982049.0031	L 250, B 114, H 153,	2,2 kg
	982050.000	L 250, B 114, H 153,	2,5 kg



	982050.0031	L 250, B 114, H 153,	2,5 kg
	982086.0031	L 1000, B 180, H 180,	3,9 kg
	982058.0031	L 500, B 180, H 180,	2,9 kg
	982092.000	L 178, B 174, H 38,	0,87 kg
	982093.000	L 178, B 194, H 38,	0,86 kg
	982524.0031	L 365, B 365, H 55,	4,4 kg



	982407.003	L 220, B 240, H 4	535 g
	982081.000	L 19, B 19, H 1	1 g
	982412.000.76	L 124, B 79, H 22	150 g