

INSTRUCTION

LINEDO
9506AS.842.476.003



RZB
LIGHTING

≈ 220 - 240 V 0/50/60 Hz IP 54 IK03



Umgebungstemperatur /
temperature ambiante
=> -25 °C ... + 45 °C



L 598, B 58, H 76



LED



1,48 kg

Φ [lm]

3950

P [W]

28

P

1 x 19,7 W

CCT [K]

4000

CRI

80

RG

RG 1

EEK

A++

EEK

A++



21 A / 230 µs

B₁₀ [St.]

12

B₁₆ [St.]

20

C₁₀ [St.]

21

C₁₆ [St.]

34

P_f

0,99



INSTRUCTION
WARTUNGSPLAN/
MAINTENANCE
SCHEDULE

DIN EN 61340-5-1



EN 12464
EN 13201



EN 12464
EN 13201



<100%



INSTRUCTION
WARTUNGSPLAN/
MAINTENANCE
SCHEDULE



100%

EN 12464



2020-12-08

www.rzb.de

1



1



2a



	L	X*
4547 mm	≤ 4500 mm	≤ 60000 mm
2291 mm	≤ 2270 mm	≤ 50000 mm

* $R_{PE} < 0,5 \Omega$
EN 60598

2b



	L	X*
4547 mm	≤ 4500 mm	≤ 60000 mm
2291 mm	≤ 2270 mm	≤ 50000 mm

* $R_{PE} < 0,5 \Omega$
EN 60598

2c






	L	X*
4547 mm	≤ 2200 mm	≤ 60000 mm
2291 mm	≤ 1100 mm	≤ 50000 mm

* $R_{PE} < 0,5 \Omega$
EN 60598






A diagram showing a square block resting on a circular base. The circular base is in contact with a horizontal surface, indicated by a line with diagonal hatching above it.


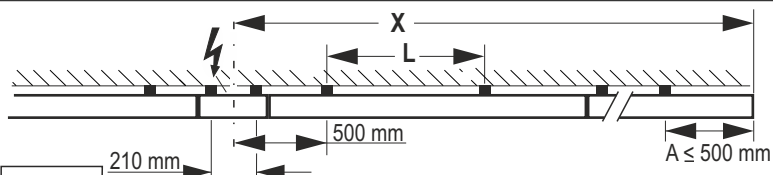



	L	* X
4547 mm	≤ 2200 mm	≤ 60000 mm
2291 mm	≤ 1100 mm	≤ 50000 mm




* $R_{PE} < 0,5 \Omega$
EN 60598

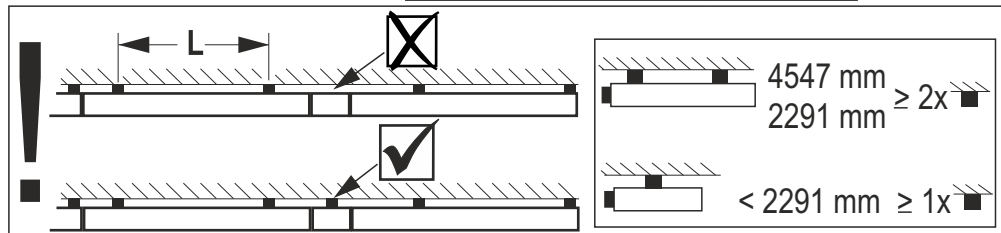

A diagram showing a square block and a circular block hanging from a ceiling. The ceiling is represented by a horizontal line with diagonal hatching above it. A vertical line connects the ceiling to the top center of the square block. The square block is positioned directly above the circular block, and they are in contact. The circular block has a cross inside it, indicating it is a solid sphere.





A diagram showing a square block and a circular block hanging from a ceiling. The ceiling is represented by a horizontal line with diagonal hatching above it. A vertical line connects the ceiling to the top center of the square block. The square block is positioned directly above the circular block, with its bottom edge touching the top edge of the circular block. The circular block has a cross inside it, indicating it is a sphere or a cylinder viewed from the side.

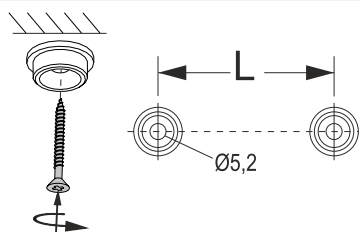

SW 14C

A diagram showing a square block and a circular block hanging from a ceiling. The ceiling is represented by a horizontal line with diagonal hatching above it. A vertical line connects the ceiling to the top center of the square block. The square block is positioned directly above the circular block, with its bottom edge touching the top edge of the circular block. The circular block has a cross inside it, indicating it is a solid sphere or cylinder.

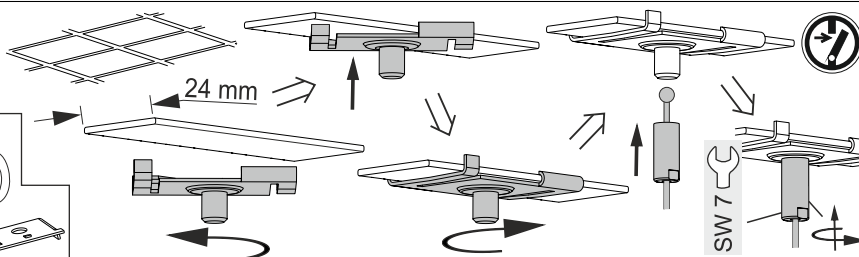

SW 7C





6a



6b



7



8



9a





9b



9c



9d



10







13b



14





Bei Fragen zu unseren Symbolen,
besuchen Sie folgende Webseite:

If you have any questions about our
signs, visit the following website:



www.rzb.de/fileadmin/assets/downloads/PDF/RZB_Symbolklaerung.pdf



Pendelmontage / Pendant mounting
Einspeisung von der Seite / Feed from the side



Deckenmontage / Ceiling mounting
Einspeisung von der Seite / Feed from the side



Pendelmontage / Pendant mounting
Einspeisung von Oben / Feed from above



Deckenmontage / Ceiling mounting
Einspeisung von Oben / Feed from above

Stecker / Plug

Buchse / Socket



Pendelmontage /
Pendant mounting



Deckenmontage /
Ceiling mounting



Hinweis zum Einsatz von Leuchten mit -Kennzeichnung nach EN 60598-2-24

Reference for application of lumiaires with - marking according to EN 60598-2-24



IP 4x

Umgebung ohne Staubablagerung
Environment without dust deposit



IP 5x

Umgebung mit nicht elektrisch leitender Staubablagerung
Environment with non-electrically conductive dust deposit



IP 6x

Umgebung mit elektrisch leitender Staubablagerung
Environment with electrically conductive dust deposit



	982678.002	Einspeisung Feed	L 312, B 58, H 76	630 g
	982678.002.1	Einspeisung Feed	L 330, B 58, H 76	728 g
	982698.002	Einspeisung Feed	L 330, B 58, H 76	850 g
	982698.002.1	Einspeisung Feed	L 312, B 58, H 76	850 g
	982698.002.2	Einspeisung Feed	L 349, B 58, H 76	850 g
	982661.000	Pendelset Pendant kit	, LP 1500	56 g
	982662.000	Pendelset Pendant kit	, LP 1500	240 g
	982663.000	Befestigungsset Fixture	L 33, B 54,	63 g
	982664.000	Befestigungsset Fixture	L 33, B 54,	39,1 g
	982665.000	Pendelset Pendant kit	, LP 1500	80 g
	982717.000	Pendelset Pendant kit	, LP 5000	190 g
	982718.000	Pendelset Pendant kit	L 54, B 30, H 14, LP 5000	240 g



	982719.000	Pendelset Pendant kit	L 54, B 30, H 42, LP 5000	270 g
	982580.010	Deckenmontageset Ceiling surface mounting kit	L 70, B 28, H 16	44 g
	982666.000	Befestigungsset Fixture	L 70, B 54, H 22	25 g
	982699.009	Endkappe End cap	L 16, B 58, H 76	21,5 g
	982700.009	Endkappe End cap	L 23, B 58, H 76	31 g
	982680.000	Verbinder Connector	L 300, B 48, H 9	181 g



RZB - Rudolf Zimmermann, Bamberg GmbH
Rheinstraße 16
96052 Bamberg

☎ 0951/7909-0
Fax: 0951/7909-198

E-mail: info@rzb-leuchten.de