

DATENBLATT

N 5800


Einbauleuchte, dreh- und schwenkbar



Dreh- und schwenkbar für den Einsatz im Bereich der Allgemein- und Akzentbeleuchtung.



Technische Daten	Einbauleuchte						
Bezeichnung	N 5800						
Artikel Nr.	1858000100	1858000200	1858000900	1858001000	1858001800	1858007900	1858008000
Farbe	chrom-matt	chrom	nickel-geb.	weiß	schwarz	gold	gold-matt
Oberfläche	galvanisiert	galvanisiert	galvanisiert	lackiert	lackiert	galvanisiert	galvanisiert
Für Leuchtmittel	QR-CBC 51mm Reflektorlampe/MR16 LED Leuchtmittel						
Nennspannung	12V AC/DC						
Nennleistung	max. 50W						
Material	Aluminiumdruckguss						
Schutzklasse	III						
Schutzart	IP20						
Drehbar	355°						
Schwenkbar	85°						
Abmessungen (ØxH)	110x70 mm						
Deckenausschnitt (Ø)	97 mm						
Einbautiefe	74 mm						
Gewicht	380 g						
Abstand zur beleuchteten Fläche	mind. 0,5 m						
Prüfzeichen	 Einbauleuchte nicht geeignet zur direkten Montage an normal entflammaren Materialien  Einbau an normal entflammaren Materialien nur in Verbindung mit einem LED Leuchtmittel						
CE-Konformität	ja						
Hinweis	beim Einbau auf ein Minimum an Konvektion achten und nicht mit Isoliermaterial abdecken						
Im Lieferumfang enthalten	Lampenfassung und Kabel (30 cm) VDE geprüft 250°C						

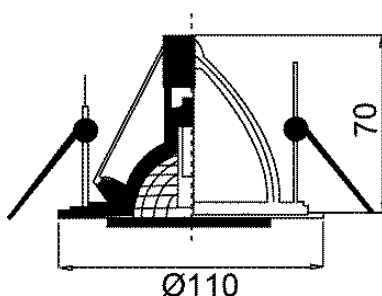

Technische Änderungen vorbehalten.

nobilé AG – Wächtersbacher Str. 78
D-60386 Frankfurt/M. Germany
Tel: +49 (0) 69/ 962205-0
www.nobile.de

nobile

rev. 0.3 – 18.03.2014

DATA SHEET


N 5800

Recessed downlight, pivoted and adjustable

Rotatable and adjustable for use in general and accent lighting.



Specifications	Recessed Downlight						
Type	N 5800						
Part no.	1858000100	1858000200	1858000900	1858001000	1858001800	1858007900	1858008000
Colour	matt chrome	chrome	br. nickel	white	black	gold	matt gold
Surface	galvanized	galvanized	galvanized	painted	painted	galvanized	galvanized
For light source	QR-CBC 51mm reflector lamp/MR 16 lamp						
Rated current	12V AC/DC						
Rated power	max. 50W						
Material	die-cast aluminium						
Safety class	III						
Protection class	IP20						
Rotatable	355°						
Adjustable	85°						
Dimensions (ØxH)	110x70 mm						
Ceiling cut-out (Ø)	97 mm						
Installation depth	74 mm						
Weight	380 g						
Distance to the lighted objects	min. 0.5 m						
Test marks	 recessed luminaire not suitable for direct mounting on normal flammable surfaces  installation on normal flammable material only in conjunction with an LED lamp						
CE-Conformity	yes						
Note	ensure constant convection and do not cover by insulation material						
Included in delivery	lamp holder and cable (30 cm) approved by VDE, 250°C						

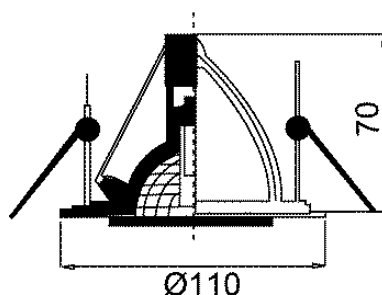

Specifications are subject to change without prior notice.