

INSTRUCTION




41-2017


RZB
LIGHTING

Flat Slim

312135.002.191


 IP 65 IK02
    220 - 230 V / 50/60 Hz
 
 3 x 1,5 mm²
 1,50 mm²

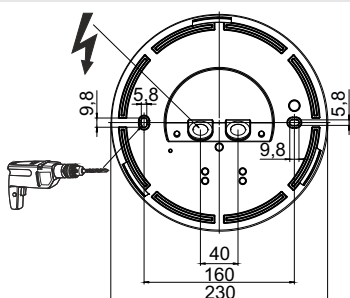

				
312135.002.191	D 230, H 63	LED	13,5 W	1,13 kg
Φ 	EEK _{LED}	EEK 	CRI	CCT
1150 lm	A+	A+	83	3000K
 B10	 B16	 C10	 C16	
114	182	114	182	0,15 A




Die Leuchte darf nur mit ihren vollständigen Schutzabdeckungen betrieben werden.
The luminaire must be used with its complete protective covers only.

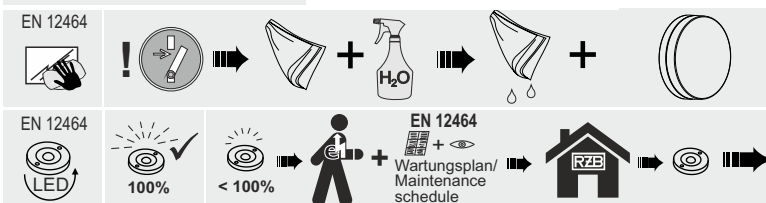


RZB
Rudolf Zimmermann,
Bamberg GmbH
Rheinstraße 16
D-96052 Bamberg
Deutschland
Telefon +49 951/79 09-0
Telefax +49 951/79 09-198
www.rzb.de
info@rzb-leuchten.de


1

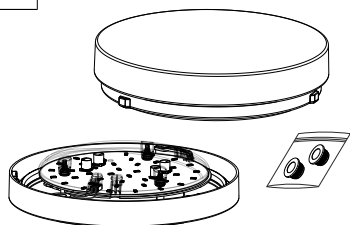


2

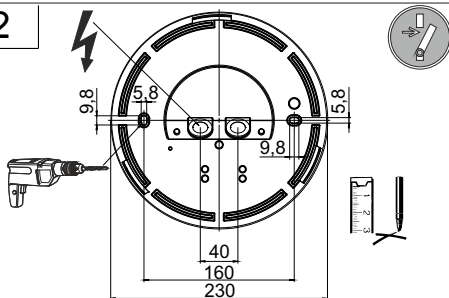


3

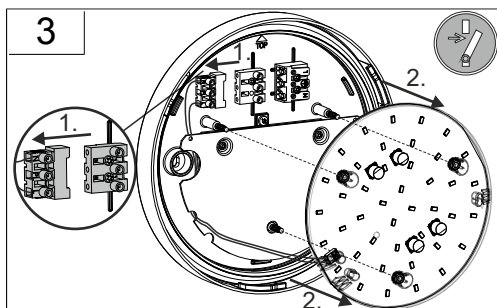


4

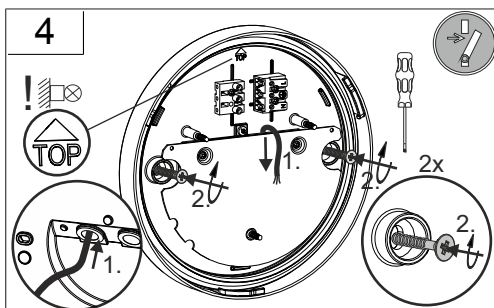

5

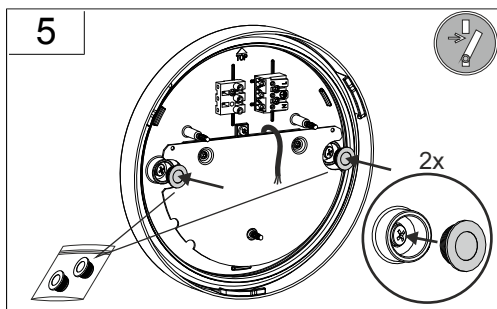


6

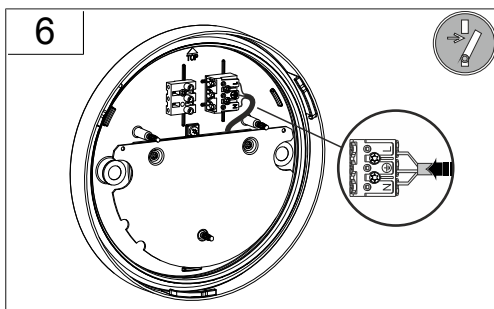

6.1


Master (OUT)

Slave

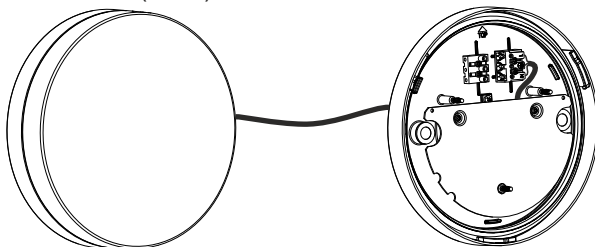





7

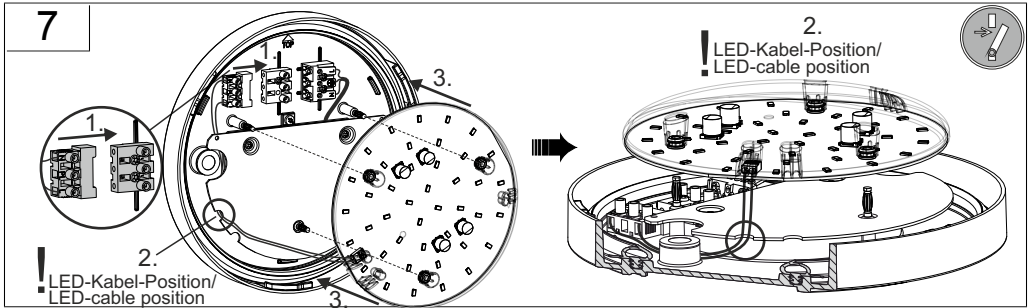

7.1

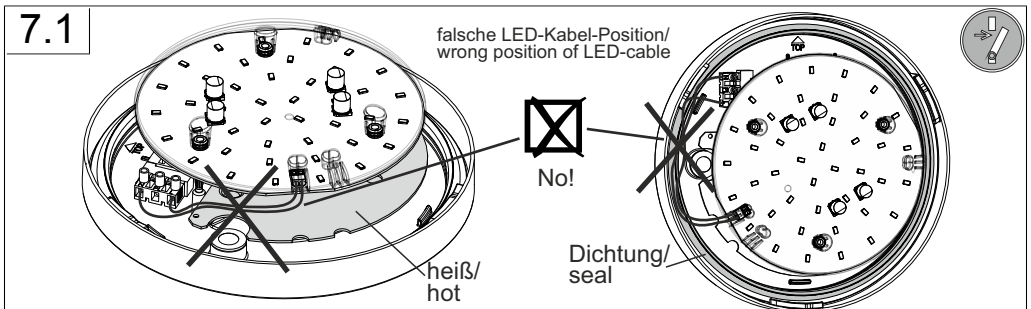


8

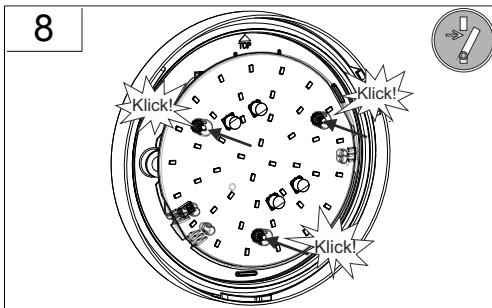

9


Master - Slave - System

radialer Bewegungsmelder/
radial motion sensor

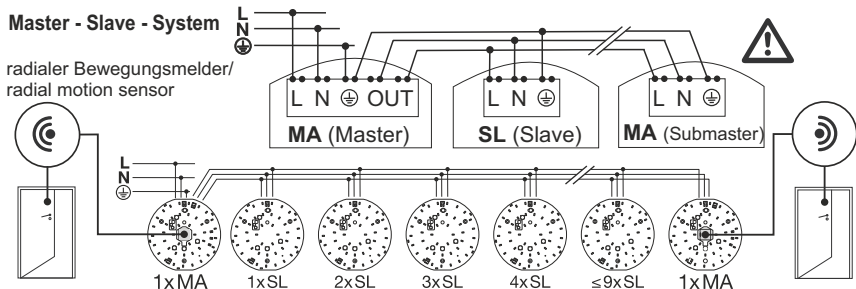





10




09-3003.052




11

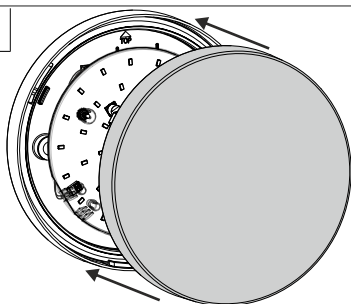

12

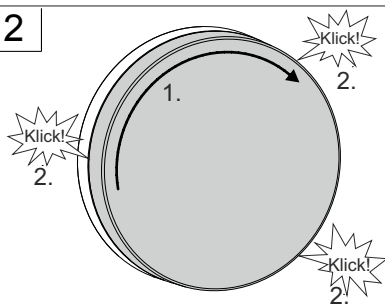

13





08-2118.002

Ersatzdiffusor PMMA D 230

265 g



Instruction:



41-2017



Instruction:



41-2017

