




INSTRUCTION

06-2019


RZB
LIGHTING

Less is more 50

312305.002

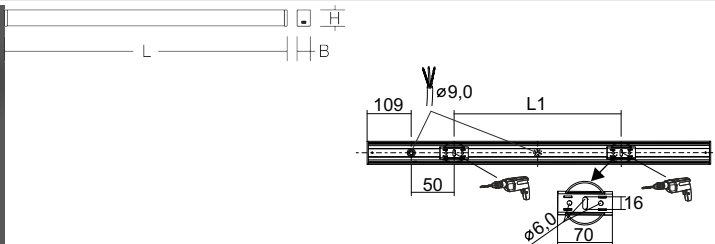


312305.002	L 842, B 57, H 75	2,06 kg	T _a min
LED	3 x 5,8 W	22 W	2300 lm
EEK	EEK		
A++	A++	16 A / 100 µs	21
			34



Die Leuchte darf nur mit ihren vollständigen Schutzabdeckungen betrieben werden.
The luminaire must be used with its complete protective covers only.

EN 12464



EN 12464
EN 13201




EN 12464 / EN 13201




RZB
Rudolf Zimmermann,
Bamberg GmbH
Rheinstraße 16
D-96052 Bamberg
Deutschland
Telefon +49 951/79 09-0
Telefax +49 951/79 09-198
www.rzb.de
info@rzb-leuchten.de




1




2

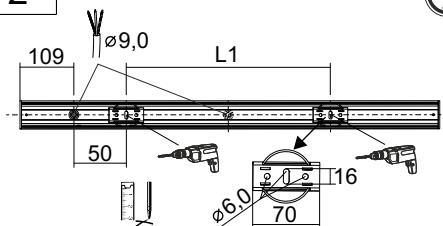

3




4

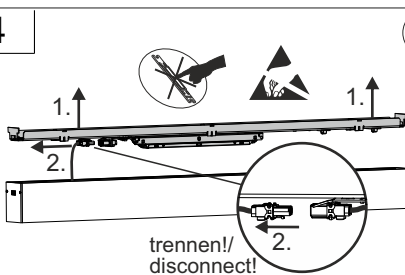


5









6a

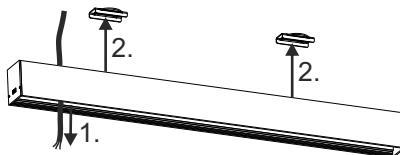

6b

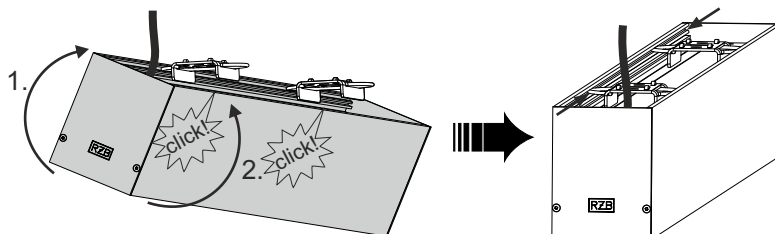

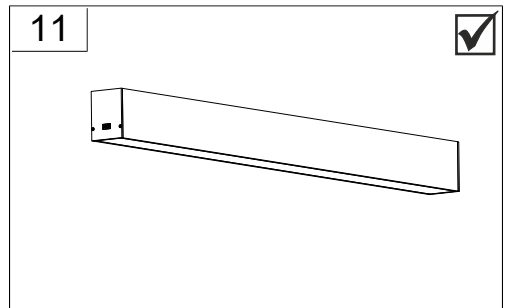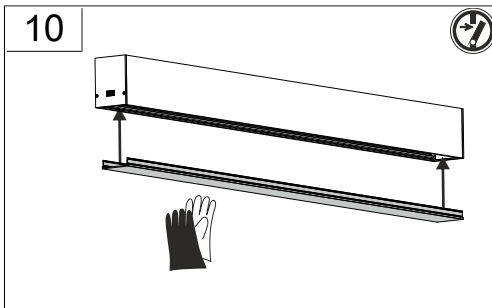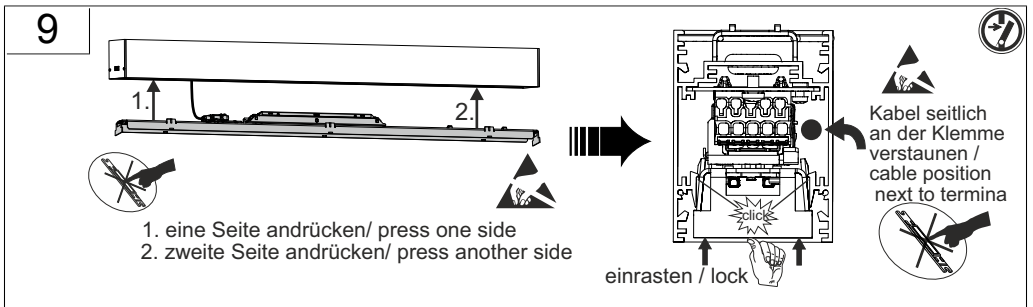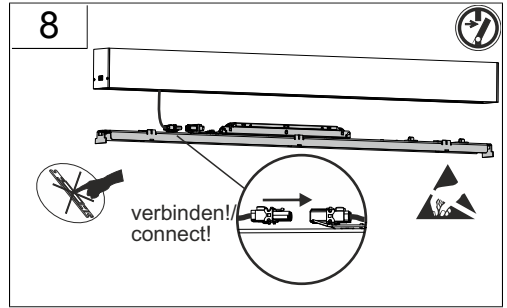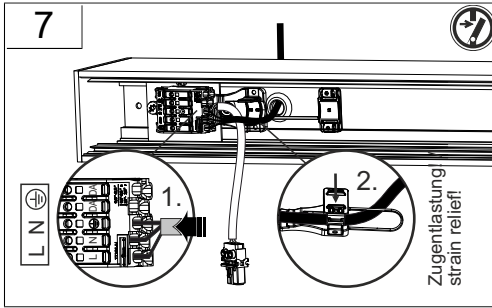

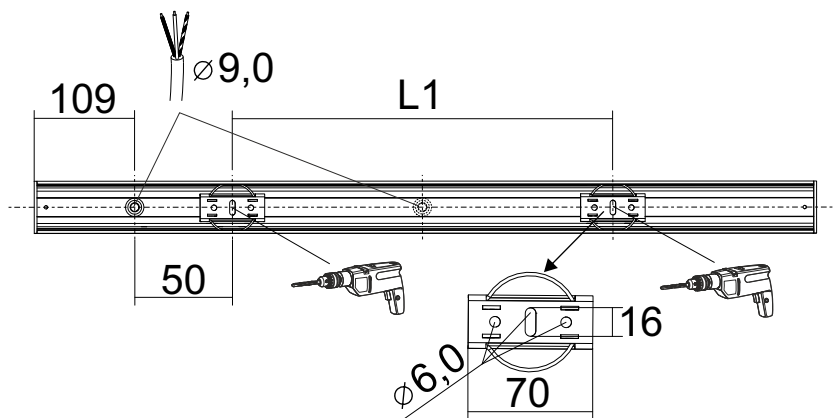

Less is more 50 Anbau

L	B	H	L1
848	57	75	580
1128	57	75	870
1408	57	75	1150
1689	57	75	1430
1969	57	75	1710

DIN 4844



Vor Installation, Wartung oder Reparatur freischalten/
power off before installation, maintenance or repair