




INSTRUCTION

06-2019

RZB
LIGHTING

Less is more 50

312341.003

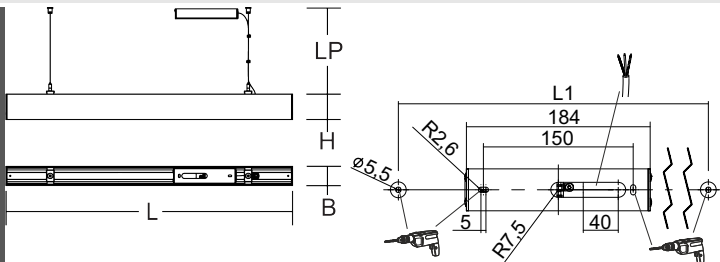

T_a min

312341.003

L 842, B 57, H 75

LP 2000

2,64 kg

-20 °C



CCT

CRI

T_a max

LED

3 x 7,5 W

35 W

3950 lm

3000 K

80

30 °C



A+, A++


A+

/ 270 µs



Die Leuchte darf nur mit ihren vollständigen Schutzabdeckungen betrieben werden.
The luminaire must be used with its complete protective covers only.

EN 12464



EN 12464

EN 13201



EN 12464 / EN 13201

Wartungsplan/
Maintenance
schedule




RZB
Rudolf Zimmermann,
Bamberg GmbH
Rheinstraße 16
D-96052 Bamberg
Deutschland
Telefon +49 951/79 09-0
Telefax +49 951/79 09-198
www.rzb.de
info@rzb-leuchten.de

www.rzb.de


1 / 4




1

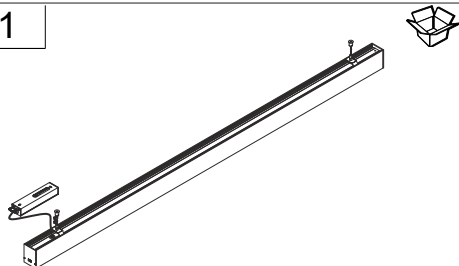


2

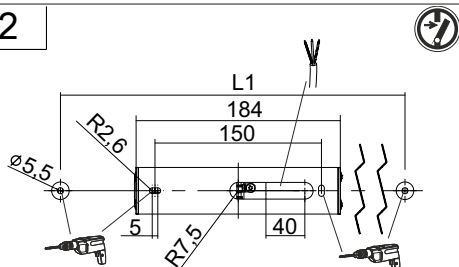


3

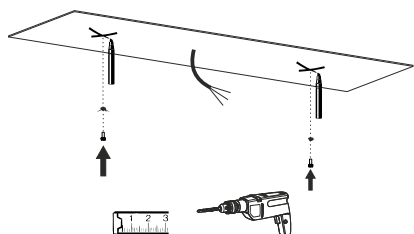


4

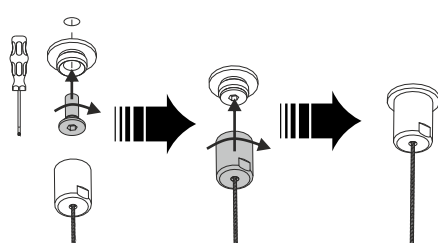


5

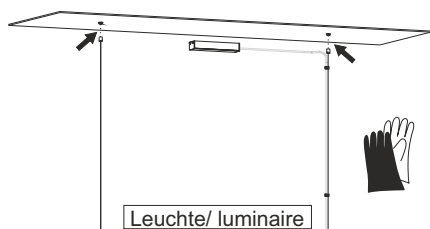


6

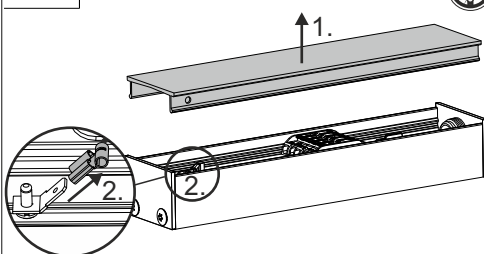

7



8

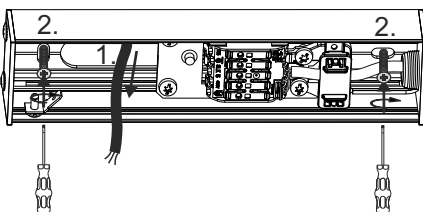





+




9

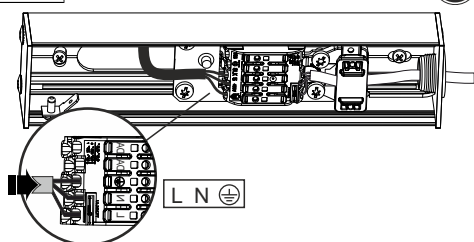


10

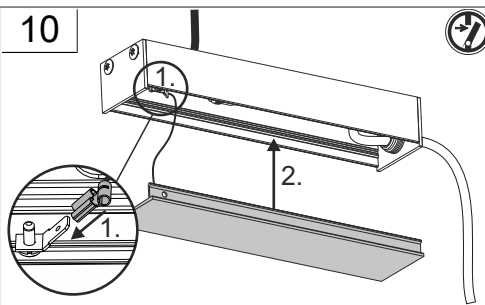


11

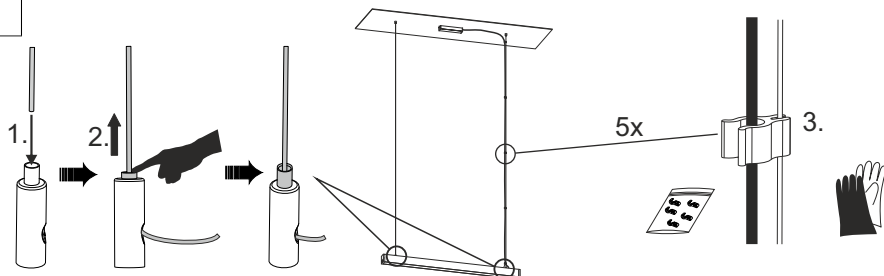

12



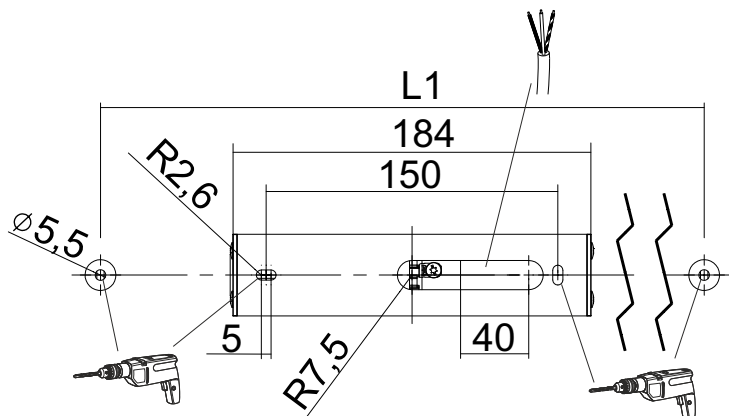

Less is more 50 Pendel

L	B	H	L1
848	57	75	580
1128	57	75	870
1408	57	75	1150
1689	57	75	1430
1969	57	75	1710

DIN 4844



Vor Installation, Wartung oder Reparatur freischalten/
power off before installation, maintenance or repair