

INSTRUCTION

12-2016

RZB
LIGHTING

Quadrat



201412.002

 IP 43, IP 44 IK02    220 - 240 V / 50 - 60 Hz



 3 x 1,5 mm²

 2,50 mm²

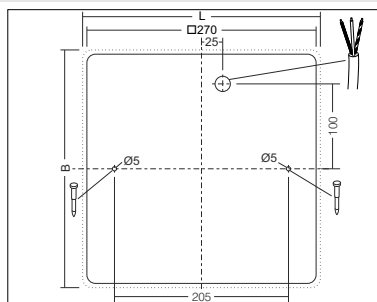

				
201412.002	L 280, B 280, H 120	1 x LED 13,6 W ⁽¹⁾	14 W	2,94 kg
	EEK _{LED}	EEK 	CRI	CCT
1000 lm	A+	A+	80	3000K



Die Leuchte darf nur mit ihren vollständigen Schutzabdeckungen betrieben werden.
The luminaire must be used with its complete protective covers only.

EN 12464



EN 12464



EN 12464


Wartungsplan/
Maintenance
schedule




RZB
Rudolf Zimmermann,
Bamberg GmbH
Rheinstraße 16
D-96052 Bamberg
Deutschland
Telefon +49 951/79 09-0
Telefax +49 951/79 09-198
www.rzb.de
info@rzb-leuchten.de




1




2

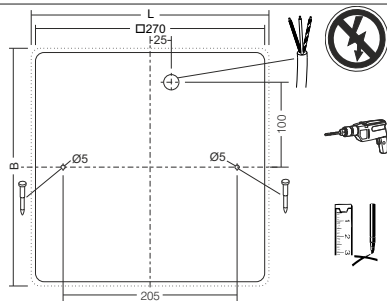


3

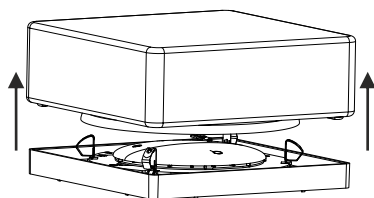


4

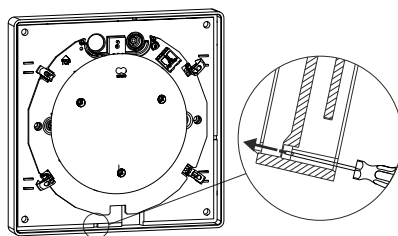


5

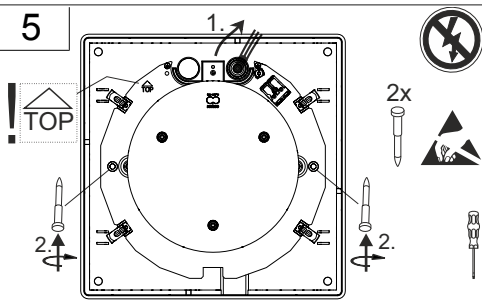


6








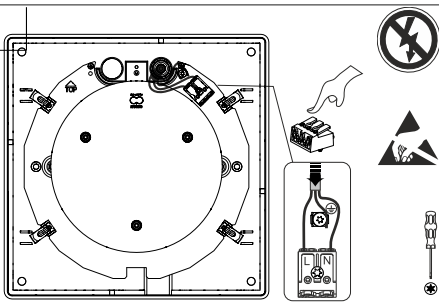


7



8



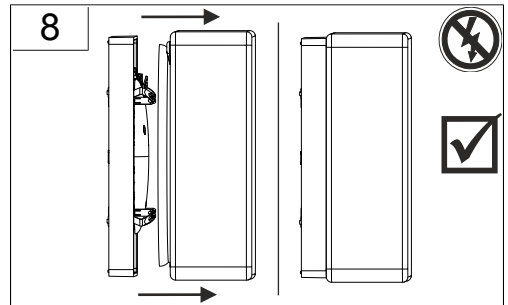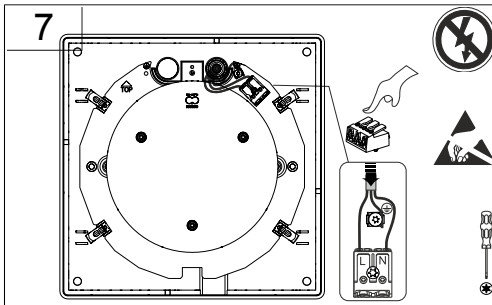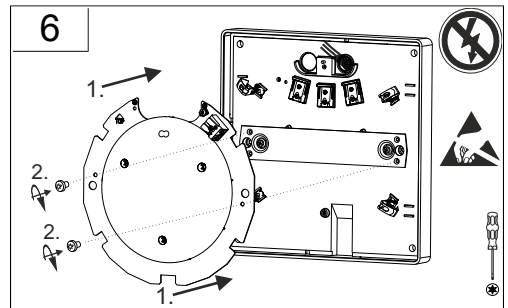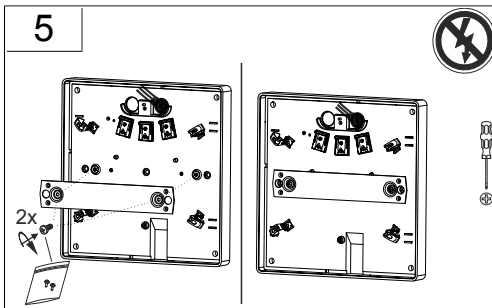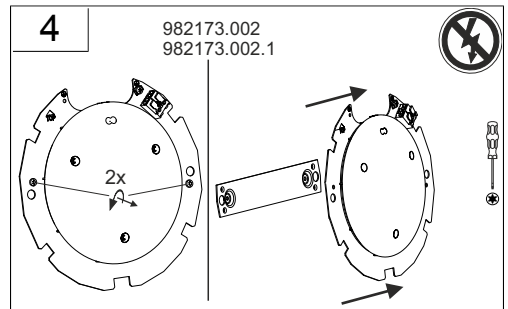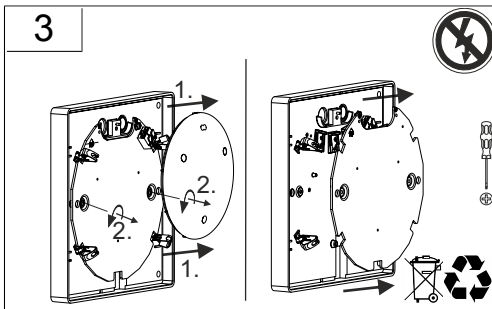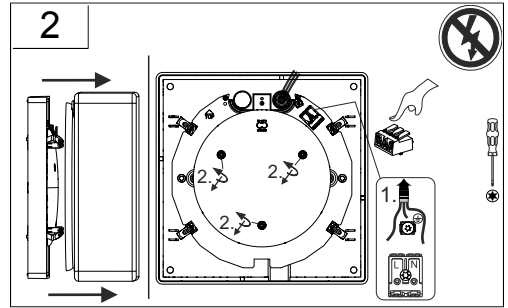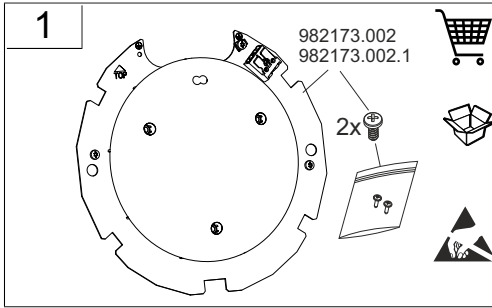



	05-20129	Ersatzglas L 280 x B 280, H 106	1,16 kg
	982173.002	D 230, H 26	670 g